



GENERAL CATALOGUE 2021



OUR COMPANY

The history of Floover began to take shape in 2006 with the union of Joan Ferrer and Andrea Prati, friends and co-owners with extensive experience in the flooring business. Based on the needs and requests of their customers, they developed a new product, Floover, multilayer rigid flooring with designs based on high-end vinyl with the Unilin click system. Later, they developed other versions and incorporated waterproof unlimited designs with remarkable success.

The aim of Floover is the continuous search for new and amazing products always based on the latest design and fashion, intending to improve the quality of life. Innovation and imagination have always been the basis of the brand and are key to its reputation in the market place, involving designers and architects to provide added value to the product. To date, Floover has achieved significant international presence.

OUR PRODUCTS

Floover's production is mainly located in Müstair, Switzerland, where the entire production process complies with Swiss law and with the European norms and standards, in addition to the very strict quality controls.

Floover provides products for both domestic and commercial use, always using new technologies and creating solutions demanded by the market, from gluing systems (Glue Down), through the floor with click system, to walls solutions. All Floover products are easy to install and are specifically designed for high durability and longevity. All this is complemented with accessories needed to complete any project.

The extensive collection of designs can be installed in any space, including wet areas like bathrooms or terraces, Floover is the ultimate solution to your project.



INDEX

OUR COMPANY / OUR PRODUCTS.....	2
TECHNOLOGY/ APPLICATIONS	4
ADVANTATGES AND BENEFITS	5
FLOOVER LVT INDOOR SOLUTIONS	6
MASTER COLLECTION	8
SWISS COLLECTION.....	28
ORIGINAL COLLECTION	38
LVT ACCESSORIES	48
FLOOVER WOVEN.....	52
WOVEN ORIGINAL RANGE.....	56
WOVEN JACQUARD RANGE.....	74
WOVEN ACCESSORIES.....	88
FLOOVER RUGS.....	90
WOVEN CUSTOM RUGS.....	92
WOVEN ECONOMIC RUGS	94
WOVEN RUGS WITH BORDER	96
WOVEN CONFORT RUGS.....	98
FLOOVER ECOLOGIC.....	100
PURE	102
MINERAL	110
MINERAL ACCESORIES	117
FLOOVER WALLCOVERING	118
ITALIAN WALLCOVERING	128
STONE WALLCOVERING.....	130
PATTERN WALLCOVERING	132
MURAL WALLCOVERING	134
WALLCOVERING ACCESSORIES	136
WARRANTY.....	138
FAQ	139
PROJECTS.....	140



TECHNOLOGY

Floover is the result of advances of engineered floors:

- Combination of vinyl on HDF.
- Click system with Unilin Licence, assuring the best installation system possible.
- The best vinyl in the market in terms of resistance and elasticity.
- Vinyl certificated 100% virgin. We can assure you that we comply with the emission norms.
- Best quality HDF, with FSC certification.
- Our company is associated with some of the best industrial partners to assure the best quality and service and we design innovative products and launch them into the market to create the tendency in the world of innovative flooring.
- Our factory has a flexible and adaptable service so that all your needs can be met, always thinking of the best way to work in order to help the environment.
- We have product certificates from the best laboratories: EN Applus,ASTM, Aitex

APPLICATIONS

COMMERCIAL USE

Shops, restaurants, sports centers, offices, stands, nightclubs, airports, stations, etc.

RESIDENTIAL USE

For any room in your home. Even in wet areas like kitchens or bathrooms.

SPECIAL APPLICATIONS

- Isolation 100% from the subsoil (laboratories, operating rooms and hospital clean rooms or clean rooms for handling organic items, cosmetics, etc ...)
- Stores or workshops in contact with pneumatic tires.
- Additional resistance for anti scratch for industrial areas.

You can apply special surface treatments on Floover floors. We recommend contacting companies specializing in these treatments, as Dr. Schutz (www.dr-schutz.com)



Produced under license of Unilin - EP nr. 0843763/U.S. - paper nr. 6.005.486





ADVANTAGES & BENEFITS

INTEGRATION

Floover offers the possibility to unify and integrate all the surfaces and elements on a setup or project using the same design or pattern on the floor, walls, ceilings and furniture. It is all about choosing one of the Floover decors and apply them on the different solutions. Accessories are also available with the same design and textures as the flooring to integrate them in your project.

DESIGN

Floover uses the vinyl design technology, which means, colour design much more accurate and surface structure more developed. Also we have a technical department which permits you to design the decor you desire. One sample, one idea and the floor that you imagine can be yours.

WARM AND REAL SURFACE

Vinyl properties give a warm and confort surface, much more close to real wood than laminates, because of overlay composition.

ABRASION RESISTANCE

From the abrasion point of view, laminate is a very resistant product, because of Overlay composition, but the thickness of the overlay is very reduced in comparison with vinyl. From optical point of view vinyl can be damaged easily, but on long term performance, vinyl is giving excellent results.

IMPACT RESISTANCE

This performance is clearly much better on Floover than any laminate. Vinyl will be not affected by any impact, compared to laminate which can be damaged definitely.

ANTISTATIC

Because of the vinyl composition, there is not static electricity produced on the floor.

FIRE RESISTANCE

Floover has a good Fire Retardant performance because of the PVC charges. Vinyl layer will retard the HDF fire performance, compare to laminate. According to European norm, EN13501-1 Floover is classified as Bfl S1.

WATER RESISTANCE

Floover offers an excellent performance against water from the top. Even on top of the joints water remains on the surface and never filters to the bottom layers, improving the performance of any laminate, because of the elasticity of the top surface which makes a pressured joint connection.

SOUND REDUCTION

Floover composition is focused on the sound reduction performance. Even of reflected sound or transmitted sound, the performance is excellent, even for the vinyl layer and specially because of the cork bottom layer. Excellent performance for hotels, Music Halls, or any place where high sound reduction performance is required.

INSTALLATION

The Unilin Click system is a guarantee of easy and quick installation. But the real advantage in front of laminate is the product stability and the perfection of the joints, because vinyl elasticity makes a perfect installation view.



LVT

VINYL WITH
DIGITAL PRINTING

FLOORING & WALLS





MASTER COLLECTION

GLUE DOWN - HDF - SPLASH₂O - SPLASH₂O LIGHT



LVT

MASTER COLLECTION SOLUTIONS

GLUING SYSTEM




GLUE DOWN

- Traditional Dry Back LVT for Glue Down
- 100% waterproof
- Leveller is required
- No dilatation gap/skirting required
- Flooring, walls or furniture

CLICK SYSTEM



Produced under license of Unilin - EF nr. 0843763/11.5. patent nr. 6,056,486



HDF

- Base film required
- Installation up to 150 m² without dilatation joints
- Compatible click with SplashH₂O



SPLASH₂O

- 100% Waterproof
- Base film required
- Installation up to 120 m² without dilatation joints
- Compatible click with HDF



SPLASH₂O LIGHT

- 100% Waterproof
- Base film required
- Installation up to 120 m² without dilatation joints

COMBINED SYSTEM
CONNECTS DRY & WET AREAS



COMPATIBLE CLICK*
* It should be informed in the order

MASTER COLLECTION FORMATS



COLLECTION

 <p>1235 x 230 mm</p>	 <p>915 x 305 mm</p>	 <p>1235 x 305 mm</p>	 <p>620 x 450 mm</p>	 <p>1815 x 230 mm</p>
<p>SEQUOIA - URBAN LUXURY - NATURAL SYNCRU RUSTIC</p>	<p>COUNTRY- WOOD - STONE LEATHER - METALLIC PLUS</p>	<p>SYNCHRO PLANK/ ENDLESS</p>	<p>STONE - LEATHER - METALLIC PLUS</p>	<p>LONGBOARD</p>

GLUE DOWN

MASTER COLLECTION

TECHNICAL DATA SHEET




SUITABLE FOR WALLS





- ① High protection and resistance PU layer
- ② Layer of transparent PVC
 - 0,3 mm
 - 0,55 mm (Longboard, Synchro, Plus)
- ③ Printed Decor
- ④ Vinyl

Characteristics	Test	Glue Down	Glue Down Synchro	Glue Down Plus
Classification	EN 16511	23/32	23/33	23/33
Dimensions	EN 427	915 x 305 mm or 620 x 450 mm (CM,CR,MT,LE) 1235 x 230 mm (NT, UB, LX,SQ)	1235 x 230 mm (Rustic) 1235 x 305 mm (Plank, Endless) 1815 x 230 mm (LB)	915 x 305 mm or 620x450 (CMT,IRT,CRT) 1235x305 mm (WDT2004)
Thickness	EN 430	1,8 mm 1,6 mm (UB,LX,NT)	2,0 mm	2,5 mm 2 mm (WDT2004)
Weight	EN 430	3,15 - 3,44 kg/m ²	3,63 kg/m ²	4,13 kg/m ²
Residual Indentation	EN 433	max. 0,03 mm	max. 0,03 mm	max. 0,03 mm
Chemical Resistance	EN 438	Grade 5	Grade 5	Grade 5
Fire Resistance	EN 13501-1	Class BFLs1 (B1)	Class BFLs1 (B1)	Class BFLs1 (B1)
Dimensional Stability	EN 434	- 0,15 %	- 0,15 %	- 0,15 %
UV Resistance	ISO 105	≥ Grade 6	≥ Grade 6	≥ Grade 6
Fungus Test	ASTM G21:96	Grade 1	Grade 1	Grade 1
Antistatic Performance	EN 1815	< 2 kv	< 2 kv	< 2 kv
Water Resistance	EN 317	0% Swelling	0% Swelling	0% Swelling
Slip Resistance	EN12633	Class 2	Class 2	Class 2
	DIN 51130	R10	R10	R10
Formaldehyde emission	EN 717	E1	E1	E1
Maritime use	MSC307(88) An.1Part 2/5	Pass (NT, LX, UB)	-	-

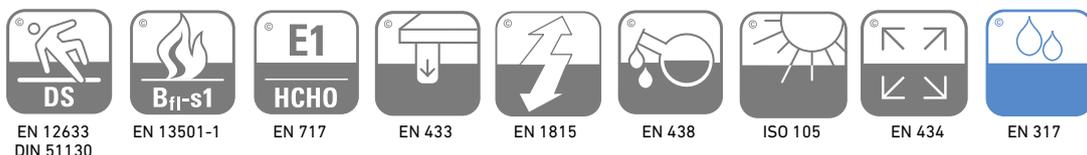



- ① High protection and resistance PU layer
- ② Layer of transparent PVC
 - 0,3 mm
 - 0,55 mm (Longboard, Synchro, Plus)
- ③ Printed Decor
- ④ Vinyl
- ⑤ HDF 6,8 mm
- ⑥ Cork 1,2 mm

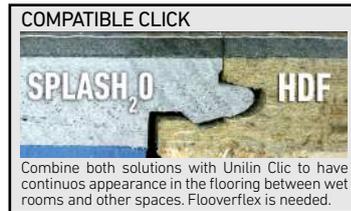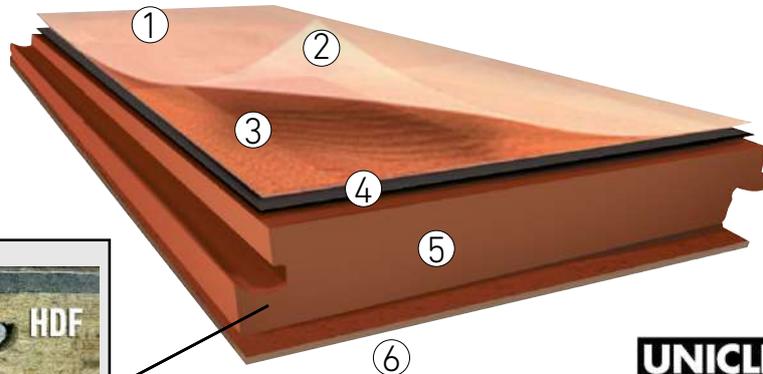

Installation up to 150m² without expansion joints. Maximum 15m length / 10m width

Characteristics	Test	HDF	HDF Synchro	HDF Plus
Classification	EN 16511	23 / 32	23 / 33	23 / 33
Dimensions	EN 427	915 x 305 mm or 620 x 450 mm (CM,CR,MT,LE) 1235 x 230 mm (NT, UB, LX,SQ)	1235 x 230 mm (Rustic) 1235 x 305 mm (Plank, Endless) 1815 x 230 mm (LB)	915 x 305 mm or 620x450 mm (CMT,IRT,CRT) 1235x305 mm (WDT2004)
Thickness	EN 428	9,8 mm 9,6 mm (UB,LX,NT)	10 mm	10 mm
Weight	EN 430	9,86 - 10,15 Kg/m ²	10,35 Kg/m ²	10,57 Kg/m ²
Residual Indentation	EN 433	max. 0,03 mm	max. 0,03 mm	max. 0,03 mm
Fire Resistance	EN 13501-1	Class BFLs1 (B1)	Class BFLs1 (B1)	Class BFLs1 (B1)
Chemical Resistance	EN 438	Grade 5 (Groups 1 and 2) and Grade 4 (Group 3)	Grade 5 (Groups 1 and 2) and Grade 4 (Group 3)	Grade 5 (Groups 1 and 2) and Grade 4 (Group 3)
Dimensional stability	EN 434	- 0,05 %	- 0,05 %	- 0,05 %
Curving	EN 434	0,2 mm	0,2 mm	0,2 mm
Acoustic Certification	EN ISO 717-2	$\Delta Lw = 18dB$	$\Delta Lw = 18dB$	$\Delta Lw = 18dB$
Cigarette burn resistance	EN 438 - 2	Class 3	Class 3	Class 3
Impact Resistance	EN 1534	7,4 Kg/mm ²	7,4 Kg/mm ²	7,4 Kg/mm ²
Slip/Slide Resistance	EN 12633 DIN 51130	Class 2 R10	Class 2 R10	Class 2 R10
Flexibility	EN 435	10 mm	10 mm	10 mm
UV Resistance	ISO 105	≥ Grade 6	≥ Grade 6	≥ Grade 6
Formaldehyde emission	EN 717	E1	E1	E1
Thermal Resistance	EN 12664	0,088 m ² K/W*	0,088 m ² K/W*	0,088 m ² K/W*
Antistatic Performance	EN 1815	< 2 kv	< 2 kv	< 2 kv
Castor chairs suitability**	EN 425	Continuous use	Continuous use	Continuous use
Locking Strength	EN 24334	> 450 kg/ml	> 450 kg/ml	> 450 kg/ml
Water Resistant test***	EN 317	< 8%	< 8%	< 8%

* Suitable for underfloor heating system. Not for cooling systems / **Suitable for soft polyamide wheels (type W)/ *** Test performance after 24h



SPLASH₂O

MASTER COLLECTION


TECHNICAL DATA SHEET




- ① High protection and resistance PU layer
- ② Layer of transparent PVC
- 0,3 mm (Original)
- 0,55 mm (Synchro and Plus)
- ③ Printed Decor
- ④ Vinyl
- ⑤ PVC Rigid 6,5 mm
- ⑥ +1,5mm foam (Optional) +3 dB



On inquiry from 500m²

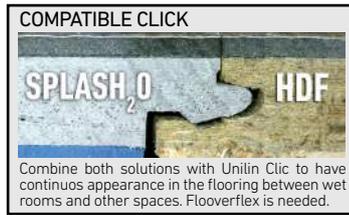


FLOOVER FLEX



UNICLIC
Installation up to 288m² without expansion joints. Maximum length 18m / width 16m

Characteristics	Test	SplasH ₂ O	SplasH ₂ O Synchro	SplasH ₂ O Plus
Classification	EN 16511	23 / 32	23 / 33	23 / 33
Dimensions	EN 427	915 x 305 mm or 620 x 450 mm (CM,CR,MT,LE) 1235 x 230 mm (NT, UB, LX,SQ)	1235 x 230 mm (Rustic) 1235 x 305 mm (Plank + Endless)	915 x 305 mm or 620x450 (CMT,IRT,CRT) 1235x305 mm (WDT2004)
Thickness	EN 430	8,3 mm 8,1 mm (UB,LX,NT)	8,5 mm	8,5 mm 9 mm (WDT2004)
Weight	EN 430	10,99 - 12,34 Kg/m ²	11,11 - 11,7 Kg/m ²	11,47 Kg/m ²
Residual Indentation	EN 433	max. 0,03 mm	max. 0,03 mm	max. 0,03 mm
Fire Resistance	EN 13501-1	Class BFLs1 (B1)	Class BFLs1 (B1)	Class BFLs1 (B1)
Chemical Resistance	EN 438	Grade 5 (Groups 1 and 2) and Grade 4 (Group 3)	Grade 5 (Groups 1 and 2) and Grade 4 (Group 3)	Grade 5 (Groups 1 and 2) and Grade 4 (Group 3)
Dimensional stability	EN 434	- 0,10 %	- 0,10 %	- 0,10 %
Curving	EN 434	0,2 mm	0,2 mm	0,2 mm
Acoustic Certification	EN ISO 717-2	ΔLw= 20dB	ΔLw= 20dB	ΔLw= 20dB
Cigarette burn resistance	EN 438 - 2	Class 3	Class 3	Class 3
Impact Resistance	EN 1534	7,4 Kgf/mm ²	7,4 Kgf/mm ²	7,4 Kgf/mm ²
Slip/Slide Resistance	EN 12633 DIN 51130	Class 2 R10	Class 2 R10	Class 2 R10
Flexibility	EN 435	10 mm	10 mm	10 mm
UV Resistance	ISO 105	≥ Grade 6	≥ Grade 6	≥ Grade 6
Formaldehyde emission	EN 717	E1	E1	E1
Water Resistant test	EN 317	0% Swelling	0% Swelling	0% Swelling
Thermal Resistance	EN 12664	0,060 m ² K/W*	0,060 m ² K/W*	0,060 m ² K/W*
Locking Strength	ISO 24334	> 600 kg/ml	> 600 kg/ml	> 600 kg/ml
Antistatic Performance	EN 1815	< 2 kv	< 2 kv	< 2 kv
Castor chairs suitability**	EN 425	Continuous use	Continuous use	Continuous use

* Suitable for underfloor heating system / **Suitable for soft polyamide wheels (type W)

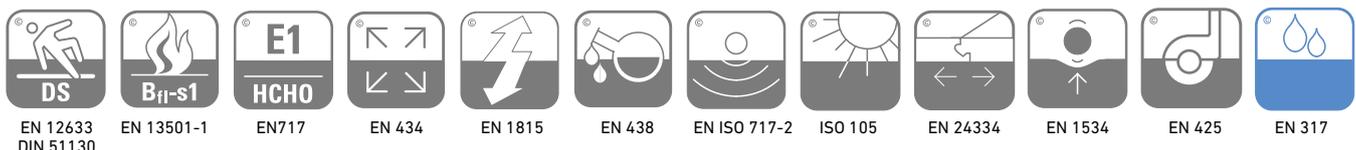


SPLASH₂O LIGHT

TECHNICAL DATA SHEET

MASTER COLLECTION



- ① High protection and resistance PU layer
- ② Layer of transparent PVC
- 0,3 mm (Original)
- 0,55 mm (Synchro and Plus)
- ③ Printed Decor
- ④ Vinyl
- ⑤ PVC Rigid 3,2 mm
- ⑥ +1,5mm foam (Optional) +3 dB



EP2246188A1 Patent Floorer



Produced under license of Unilin - EP n. 0813763/015 - patente n. 6.506.485

Installation up to 120m² without expansion joints. Maximum length 12m / width 10m

Characteristics	Test	SplashH ₂ O Light	SplashH ₂ O Light Synchro	SplashH ₂ O Light Plus
Classification	EN 16511	23 / 32	23 / 33	23 / 33
Dimensions	EN 427	915 x 305 mm or 620 x 450 mm (CM,CR,MT,LE) 1235 x 230 mm (NT, UB, LX,SQ)	1235 x 230 mm (Rustic) 1235 x 305 mm (Plank + Endless)	915 x 305 mm or 620x450 (CMT,IRT,CRT) 1235x305 mm (WDT2004)
Thickness	EN 430	5,1 mm 4,9 mm (UB,LX,NT)	5,3 mm	5,7 mm 5,8 (WDT2004)
Weight	EN 430	7,21 - 7,45 Kg/m ²	7,63 - 7,86 Kg/m ²	7,35 Kg/m ²
Residual Indentation	EN 433	max. 0,03 mm	max. 0,03 mm	max. 0,03 mm
Fire Resistance	EN 13501-1	Class BFLs1 (B1)	Class BFLs1 (B1)	Class BFLs1 (B1)
Chemical Resistance	EN 438	Grade 5 (Groups 1 and 2) and Grade 4 (Group 3)	Grade 5 (Groups 1 and 2) and Grade 4 (Group 3)	Grade 5 (Groups 1 and 2) and Grade 4 (Group 3)
Dimensional stability	EN 434	- 0,10 %	- 0,10 %	- 0,10 %
Curving	EN 434	0,5 mm	0,5 mm	0,5 mm
Acoustic Certification	EN ISO 717-2	ΔLw= 17dB	ΔLw= 17dB	ΔLw= 17dB
Cigarette burn resistance	EN 438 - 2	Class 3	Class 3	Class 3
Impact Resistance	EN 1534	7,4 Kgf/mm ²	7,4 Kgf/mm ²	7,4 Kgf/mm ²
Slip/Slide Resistance	EN 12633 DIN 51130	Class 2 R10	Class 2 R10	Class 2 R10
Flexibility	EN 435	10 mm	10 mm	10 mm
UV Resistance	ISO 105	≥ Grade 6	≥ Grade 6	≥ Grade 6
Formaldehyde emission	EN 717	E1	E1	E1
Water Resistant test	EN 317	0% Swelling	0% Swelling	0% Swelling
Thermal Resistance	EN 12664	0,032 m ² K/W*	0,032 m ² K/W*	0,032 m ² K/W*
Locking Strength	ISO 24334	> 500 kg/ml	> 500 kg/ml	> 500 kg/ml
Antistatic Performance	EN 1815	< 2 kv	< 2 kv	< 2 kv
Castor chairs suitability**	EN 425	Continuous use	Continuous use	Continuous use

* Suitable for underfloor heating system / **Suitable for soft polyamide wheels (type W)



master collection

synchro **ENDLESS**

DIMENSIONS: 1235 x 305 mm

Wear Layer Thickness: 0,55 mm

Embossing: Wood Register Embossing

Pattern repeat: 6x2

Solutions: Glue Down, HDF, SplasH2O, SplasH2O Light

The synchronous structure enhances the natural grain and contrasts of the wood, giving depth and realism to the entire surface.



SC3013
Endless Old



SC3014
Endless Antique



SC3015
Endless Real



SC3016
Endless Ice




SC3017
Endless Modern



SC3018
Endless Warm



SC30118/ SPLASH2O solution

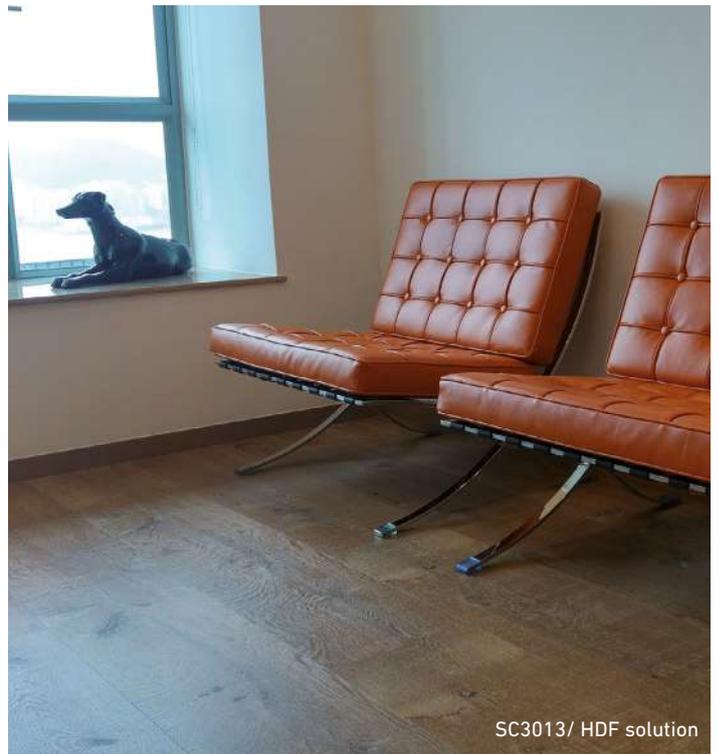

SC3013/ HDF solution

master collection

synchro RUSTIC



Microbevel
4 sides

DIMENSIONS: 1235 x 230 mm

Wear Layer Thickness: 0,55 mm

Embossing: Wood Register Embossing

Pattern repeat: 4x2

Solutions: Glue Down, HDF, SplasH2O, SplasH2O Light

The synchronous structure enhances the natural grain and contrasts of the wood, giving depth and realism to the entire surface.



SC3001
Rustic Oak Moscow



SC3002
Rustic Oak Stockholm



SC3003
Rustic Oak Zurich



SC3004
Rustic Oak Amsterdam



SC3005
Rustic Oak Berlin



SC3006
Rustic Oak Dublin



SC3004 / HDF solution

master collection
SYNCHRO PLANK

DIMENSIONS: 1235 x 305 mm
Wear Layer Thickness: 0,55 mm
Embossing: Wood Register Embossing
Pattern repeat: 4x2
Solutions: Glue Down, HDF, SplasH2O, SplasH2O Light

The synchronous structure enhances the natural grain and contrasts of the wood, giving depth and realism to the entire surface.



SC3007
Plank Harmony Dark



SC3008
Plank Harmony Accent



SC3009
Plank Harmony White



SC3010
Plank Harmony Light




SC3011
Plank Harmony Grey



SC3012
Plank Harmony Classic



SC3011 / HDF solution

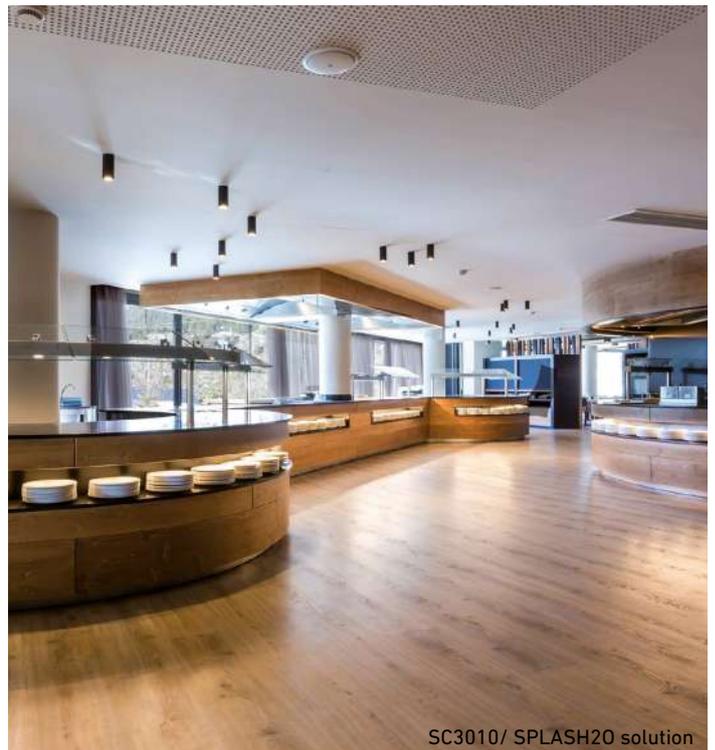

SC3010/ SPLASH20 solution

master collection **PLUS**

DIMENSIONS: 915 x 305 mm (Also available in 620 x 450 mm) / 1235x305 mm (WDT2004)

Wear Layer Thickness: 0,55 mm

Embossing: Smooth/Wood/Fineline

Pattern repeat: 2x2

Solutions: Glue Down, HDF, SplasH2O, SplasH2O Light

Maximum resistance of use under any conditions of use and maximum protection against stains and chemicals.



IRT2005
Iron



IRT2006
Iron Gold



CMT2007
Cement Silver



CMT2008
Cement White



WDT2001
Wood Wenge



WDT2002
Wood White



WDT2004*
Industrial Brown

* Different dimensions and logistics



WDT2002/ SPLASH20 LIGHT solution

master collection

SEQUOIA

DIMENSIONS: 1235 x 230 mm
Wear Layer Thickness: 0,3 mm
Embossing: Wood
Pattern repeat: 4x2
Solutions: Glue Down, HDF, SplasH2O, SplasH2O Light

A really impressive line. Due to the length of its planks, its superficial texture and its beautiful natural designs.



SQ1801
Ancient Oak



SQ1805
Oak Limewashed



SQ1806
Aspen Oak



SQ1807
Ash



SQ1808
Barrel Grey



SQ1809
Excelsior Grey



SQ1801 / SPLASH20 solution



SQ1801 / SPLASH20 solution

master collection
COUNTRY

DIMENSIONS: 915 x 305 mm

Wear Layer Thickness: 0,3 mm

Embossing: Wood

Pattern repeat: 2x2

Solutions: Glue Down, HDF, SplashH2O, SplashH2O Light

Wood look decors so realistic that they recreate rustic and natural scenarios like those of old country houses.



CT1702
Tradition Classic



CT1703
Tradition Lime Washed



CT1704
Tradition Authentic



CT1706
Rustic Old



CT1707
Rustic Natur



CT1708
Rustic Light



master collection

WOOD

DIMENSIONS: 915 x 305 mm

Wear Layer Thickness: 0,3 mm

Embossing: Wood

Pattern repeat: 2x2

Solutions: Glue Down, HDF, SplasH2O, SplasH2O Light

Decors with all the warmth personality and ancient virtues, giving rise to a new interpretation of natural spontaneity.



WD1002
Green Grey



WD1003
Wenge



WD1004
White Grey



WD1005
Jatoba



WD1006
Maple



WD1008
Oak Black



WD1009
Oak White



WD1006/ SPLASH20 solution



WD1006/ SPLASH20 solution

master collection

STONE

DIMENSIONS: 915 x 305 mm (Also available in 620 x 450 mm)

Wear Layer Thickness: 0,3 mm

Embossing: Concrete/Cement

Pattern repeat: 2x2

Solutions: Glue Down, HDF, SplasH2O, SplasH2O Light

A collection with infinite possibilities and unique characteristics of durability and comfort.




CR1102
Ceramic Perla



CR1103
Ceramic Antracita



CM1304
Cement Dark

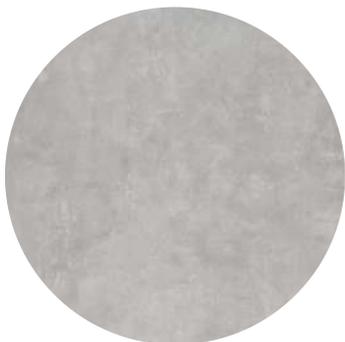

CM1305
Cement Grey



CM1306
Concrete Dark



CM1307
Concrete Light



CM1305 / HDF solution

master collection **LEATHER**

DIMENSIONS: 915 x 305 mm (Also available in 620 x 450 mm)

Wear Layer Thickness: 0,3 mm

Embossing: Leather

Pattern repeat: 2x2

Solutions: Glue Down, HDF, SplasH2O, SplasH2O Light

Real texture that appears to be genuine leather. With the slightest touch you are almost transported to a truly glamorous dimension.




LE1601
Leather Black



LE1602N
Leather Brown



LE1603
Leather Crocodile

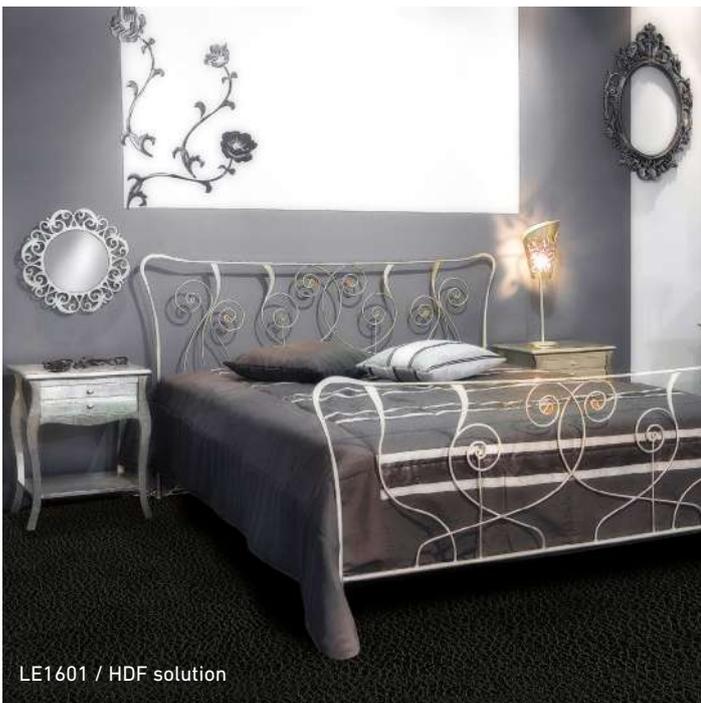

LE1601 / HDF solution



LE1603 / SPLASH2O solution



LE1602N / HDF solution

master collection
METALLIC

DIMENSIONS: 915 x 305 mm (Also available in 620 x 450 mm)

Wear Layer Thickness: 0,3 mm

Embossing: Metallic

Pattern repeat: 2x2

Solutions: Glue Down, HDF, SplashH2O, SplashH2O Light

Recreate futuristic, modern and avant-garde spaces thanks to the originality of its color and to the elegant texture.



MT1401
Metallic Silver



MT1401/ HDF solution



MT1401/ SPLASH2O solution



MT1401/ SPLASH2O solution

master collection
NATURAL

DIMENSIONS: 1235 x 230 mm

Wear Layer Thickness: 0,3 mm

Embossing: Thin Grain

Pattern repeat: 8x2

Solutions: Glue Down, HDF, SplasH2O, SplasH2O Light

Neat and clean wood designs from a natural oak with less repetition in the pattern, which gives an even more natural impression.



NT1201
White Washed



NT1202
Grey Oak



NT1203
Volcano



NT1204
White Oak



NT1205
Natural Oak



NT1204/ SplasH2O solution

master collection
URBAN

DIMENSIONS: 1235x 230 mm
Wear Layer Thickness: 0,3 mm
Embossing: Handscape
Pattern repeat: 4x2
Solutions: Glue Down, HDF, SplasH2O, SplasH2O Light

Clean and neat wood designs without knots thought and conceived for city hotels and appartments alike.



UB1206
Kensington



UB1207
Chelsea



UB1208
Knightsbridge



UB1209
Belgravia



UB1207 / HDF solution



UB1206 / HDF solution

master collection
LUXURY

DIMENSIONS: 1235 x 230 mm

Wear Layer Thickness: 0,3 mm

Embossing: Handscape (LX1213 Wood)

Pattern repeat: 4x2

Solutions: Glue Down, HDF, SplasH2O, SplasH2O Light

Exotic wood designs conceived for residential objects with a noble and luxurious atmosphere.



LX1210
Chesnut



LX1211
Walnut Grey



LX1212
Walnut



LX1213
Maple *

* Dimensions and logistic data same as Sequoia range



LX1212 / HDF solution

master collection
LONGBOARD



Microbevel
4 sides

DIMENSIONS: 1815 x 230 mm
Wear Layer Thickness: 0,55 mm
Embossing: Wood
Pattern repeat: 4x2
Solutions: Glue Down, HDF

An innovative and modern plank size and enables to visually widen the room and create a classic atmosphere.



LB9001
Molokai



LB9002
Gardner



LB9003
Necker



LB9004
Laysan

All longboard decors are only available in Glue Down or HDF solutions




LB9004 / HDF and Glue Down solutions



LB9003 / HDF solution

SWISS COLLECTION

GLUE DOWN - HDF - SPLASH₂O DESIGN

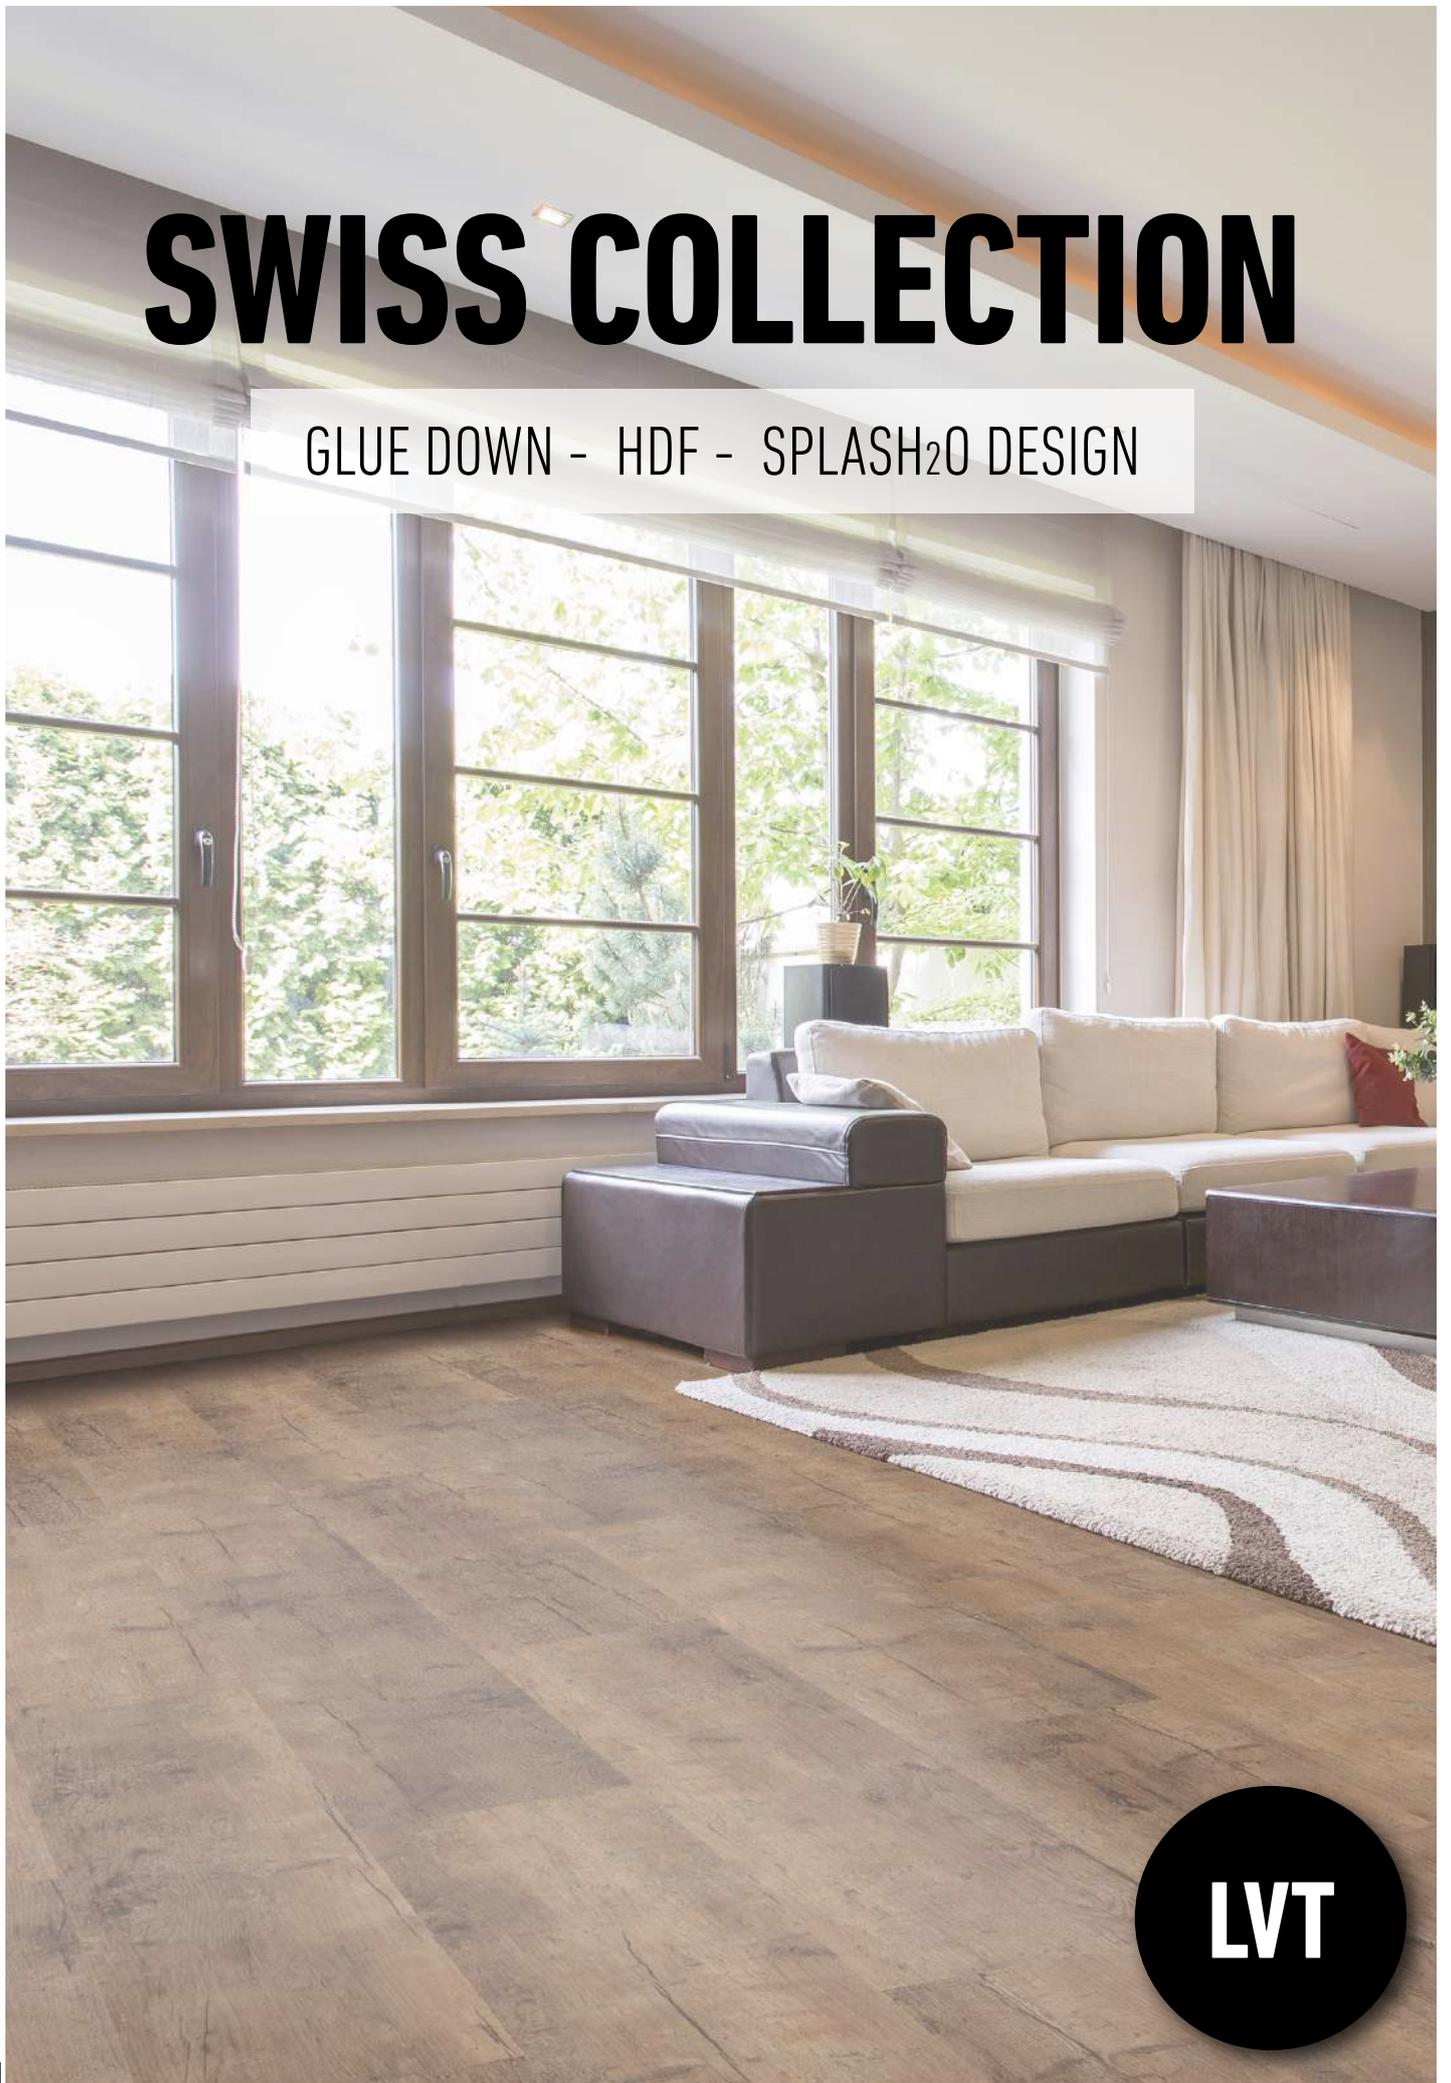

SWISS COLLECTION SOLUTIONS

GLUING SYSTEM




GLUE DOWN

- Traditional Dry Back LVT for Glue Down
- 100% waterproof
- Leveller is required
- No dilatation gap/skirting required
- Flooring, walls or furniture

CLICK SYSTEM



Produced under license of Unilin - EP nr. 0843763/U.S. potvni nr. 6.006.486



HDF

- Base film required
- Installation up to 150 m² without dilatation joints



SPLASH₂O DESIGN

- 100% Waterproof
- No subfloor preparation
- Waterproof and acoustic integrated underlay
- Installation up to 150 m² without dilatation joints
- Perfect stability and impact resistance

SWISS COLLECTION FORMATS



COLLECTION



WOOD 0,3 Y 0,55



STONE

GLUE DOWN

SWISS COLLECTION

TECHNICAL DATA SHEET




SUITABLE FOR WALLS

- ① High protection and resistance PU layer
- ② Layer of transparent PVC (0,3/0,55mm)
- ③ Printed Design
- ④ Vinyl



Characteristics	Test	Glue Down Swiss Collection
Classification	EN 16511	23/32 (0,3mm) - 23/33 (0,55mm)
Dimensions	EN 427	1235 x 230/305 mm (Wood) 620x450 mm (Stone)
Thickness	EN 430	1,6/ 1,8 mm
Weight	EN 430	3,40/ 4,13 kg/m ²
Fire Resistance	EN ISO 9239-1	Class BFLs1 (B1)
Dimensional Stability	EN 434	< 0,15 %
Residual Indentation	EN 433	max. 0,03 mm
Antistatic Performance	EN 1815	< 2kV
Acoustic Certification	EN ISO 717-2	ΔLw= 4/5dB
UV Resistance	ISO 105	6
Slip/Slide resistance	EN12633	Class 2
	DIN 51130	R10
Chemical Resistance	EN 438	Grade 5
Fungus Test	ASTM G21:96	Grade 1
Water Resistance	EN 317	0% Swelling
Formaldehyde emission	EN 717	E1

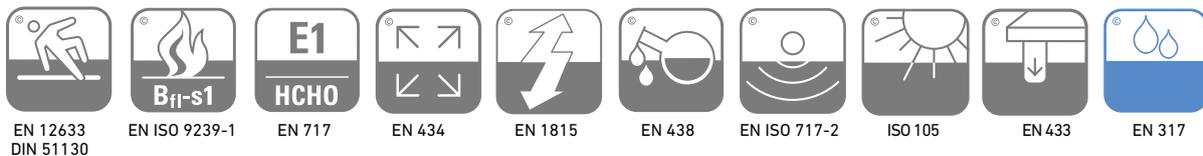


IMPORTANT INFORMATION:

The references SD55-2920, SD55-2921 and SD55-2922 are not available in Glue Down and HDF versions. The references SD30-1903, SD30-1904 and SD55-2905 have a variation of tone in comparison with the SplashH2O Design version.

HDF

SWISS COLLECTION

TECHNICAL DATA SHEET

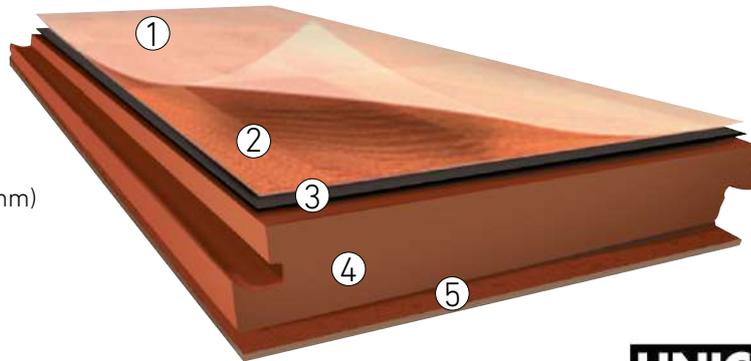

Produced under license of Unilin - EP nr. 0843753/3.5. parent nr. 6.006.486
Installation up to 150m² without expansion joints. Maximum 15m length / 10m width.

- ① Layer of transparent PVC (0,3/0,55mm)
- ② Printed Design
- ③ Vinyl
- ④ High density HDF board
- ⑤ Cork

Characteristics	Test	HDF Swiss Collection
Classification	EN 16511	23/32 (0,3mm) - 23/33 (0,55mm)
Dimensions	EN 427	1235 x 230/305 mm (Wood) 620x450 mm (Stone)
Thickness	EN 428	9,6 mm / 10 mm
Weight	EN 430	9 / 10 Kg/m ²
Residual Indentation	EN 433	max. 0,03 mm
Fire Resistance	EN 13501-1	Class BFLs1 (B1)
Resistance to chemicals	EN 423	Good
Dimensional Stability	EN 434	- 0,05 %
Acoustic Certification	EN ISO 717-2	ΔLw= 14dB
Coefficient of friction	DIN 51130	R10
UV ray resistance	ISO 105	≥ Grade 6/7
Emissions	-	in conformity with AgBB
Thermal Resistance	EN 12664	0,088 m ² K/W
Reaction to static electricity	EN 1815	< 2 kv
Effect of castor chair	EN 425	Suitable for type W
Locking Strenght	EN 24334	> 450 kg/ml
Water Resistant test	EN 317	< 8%



EN 12633
DIN 51130



EN ISO 9239-1



EN 717



EN 434



EN 1815



EN 438



EN ISO 717-2



ISO 105



EN 433



EN 12664



EN 317


IMPORTANT INFORMATION:

The references SD55-2920, SD55-2921 and SD55-2922 are not available in Glue Down and HDF versions. The references SD30-1903, SD30-1904 and SD55-2905 have a variation of tone in comparison with the SplashH2O Design version.

SPLASH₂O DESIGN

TECHNICAL DATA SHEET

SWISS COLLECTION

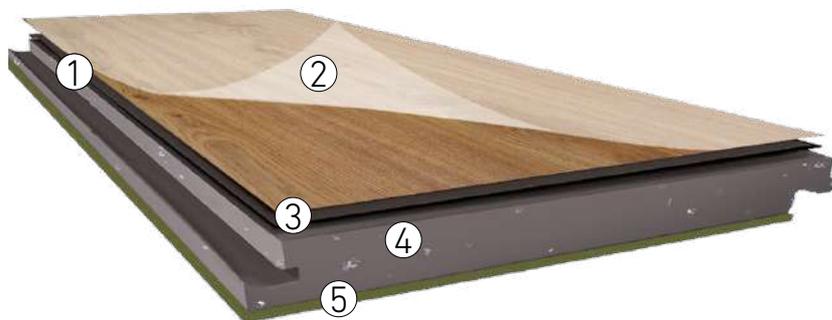

- ① High protection and resistance PU layer
- ② Vinyl foil: 0,3 / 0,55 mm + decor 0,1 mm
- ③ Elastic vinyl foil 0,5 mm
- ④ Waterproof hydro core board 3,2 mm
- ⑤ Waterproof sound underlay 1,4 mm



Produced under license of Unilin - EP nr. 0843763/0.5, patent nr. 6.006.486
Installation up to 150m² without expansion joints. Maximum 15m length / 10m width.

Characteristics	Test	SplashH2O Design
Classification	EN 16511	23/32 (0,3mm) - 23/33 (0,55mm)
Dimensions	EN 427/428	1235 x 230/305 mm (Wood) - 620x450 mm (Stone)
Thickness	EN 430	5,5 - 5,7 mm
Weight	EN 430	ca. 6000 - 6.200 g/m ²
Impact Sound Reduction	EN ISO 717-2	18 dB
Fire Resistance	EN ISO 9239-1	Class BFLs1 (B1)
Effect of castor chair	EN 425	Suitable for type W
Dimensional Stability	EN 434	< 0,10 %
Thermal Resistance	EN 12524	0,05 m ² K/W
Residual Indentation	EN 433	max. 0,03 mm
Reaction to static electricity	EN 1815	< 2kV
UV Resistance	ISO 105	6/7
Coefficient of friction	EN 51130	R10
Resistance to chemicals	EN 438	Good resistance
Emission		in conformity with AgBB
Water Resistant test	EN 317	0% Swelling
Locking Strength	ISO 24334	> 500 kg/m
Formaldehyde emission	EN 717	E1



EN 12633
DIN 51130



EN ISO 9239-1



EN 717



EN 434



EN 1815



EN 438



EN ISO 717-2



ISO 105



EN 433



EN 12664



EN 317

swiss collection

synchro WOOD 0,3

DIMENSIONS: 1235 x 230/305 mm

Wear Layer Thickness: 0,3 mm

Embossing: Wood Synchro

Pattern repeat: 4x5

Solutions: Glue Down, HDF, SplasH2O Design



SD30-S902
Synchro Brown Oak



SD30-S903
Synchro White Oak



SD30-S904
Synchro Natural Oak



SD30-S905
Synchro Grey Oak



SD30-S907
Synchro Light Oak



SD30-1903 Sun Oak

swiss collection
WOOD 0,3

DIMENSIONS: 1235 x 230/305 mm

Wear Layer Thickness: 0,3 mm

Embossing: Wood

Pattern repeat: 4x5

Solutions: Glue Down, HDF, SplashH2O Design



SD30-1907
White Beach



SD30-1909
Light Oak



SD30-1908
Grey Oak



SD30-1913
Beach Oak



SD30-1901
Natural Beech



SD30-1906
Brown Oak



SD30-1911
Natural Oak



SD30-1909 Light Oak

swiss collection
WOOD 0,3

DIMENSIONS: 1235 x 230/305 mm

Wear Layer Thickness: 0,3 mm

Embossing: Wood

Pattern repeat: 4x5

Solutions: Glue Down, HDF, Splash2O Design



SD30-1903
Sun Oak



SD30-1912
Rosewood



SD30-1904
Natural Chestnut



SD30-1902
Dark Chestnut



SD30-1905
Ancient Oak



SD30-1910
Dark Oak



SD55-2907 Rustic Pine

swiss collection

WOOD 0,55

DIMENSIONS: 1235 x 230 mm (Also available in 1235 x 305 mm)

Wear Layer Thickness: 0,55 mm

Embossing: Wood

Pattern repeat: 4x5

Solutions: Glue Down, HDF, SplashH2O Design



SD55-2901
Old Grey Oak



SD55-2902
Old Dark Oak



SD55-2903
Old Natural Oak



SD55-2904
European Oak



SD55-2905
Light European Oak



SD55-2906
Classic Oak



SD55-2907
Rustic Pine



SD55-2908
Modern Oak



SD55-2909
Tamarack Brown



SD55-2912
Beach Oak



SD55-2913
Clean Oak



SD55-2914
Traditional Oak



SD55-2915
Old Grey Pine



SD55-2916
Limewashed Oak



SD55-2917
Tamarack Light



SD55-2918
English Oak

swiss collection

STONE 0,55

DIMENSIONS: 620 x 450 mm

Wear Layer Thickness: 0,55 mm

Embossing: Cement

Pattern repeat: 4x5

Solutions: Glue Down, HDF, SplasH2O Design



SD55-2910 *
Brown Cement



SD55-2911 *
Modern Cement



SD55-2919 *
Light Cement



SD55-2920 *
White Cement




SD55-2921 *
Silver Cement



SD55-2922 *
Dark Cement




SD55-2949
White Marble

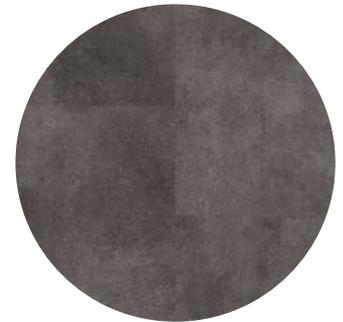


SD55-S3399
Dark Slate



SD55-S10396
Light Grey Marble

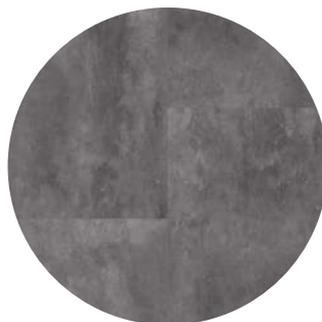

SD55-S37289
Cement Concrete

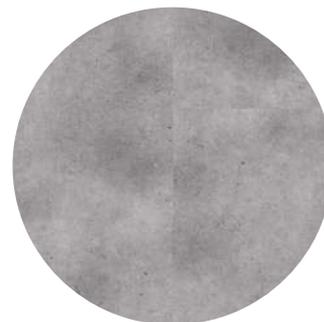


SD55-S38384
Grey Stone

* Decors are available in rigid wallcovering stone solution

ORIGINAL COLLECTION

GLUE DOWN - LOOSE LAY ANTISKID -
SPC - RSVP - INNOVA 4.0 - HERRINGBONE

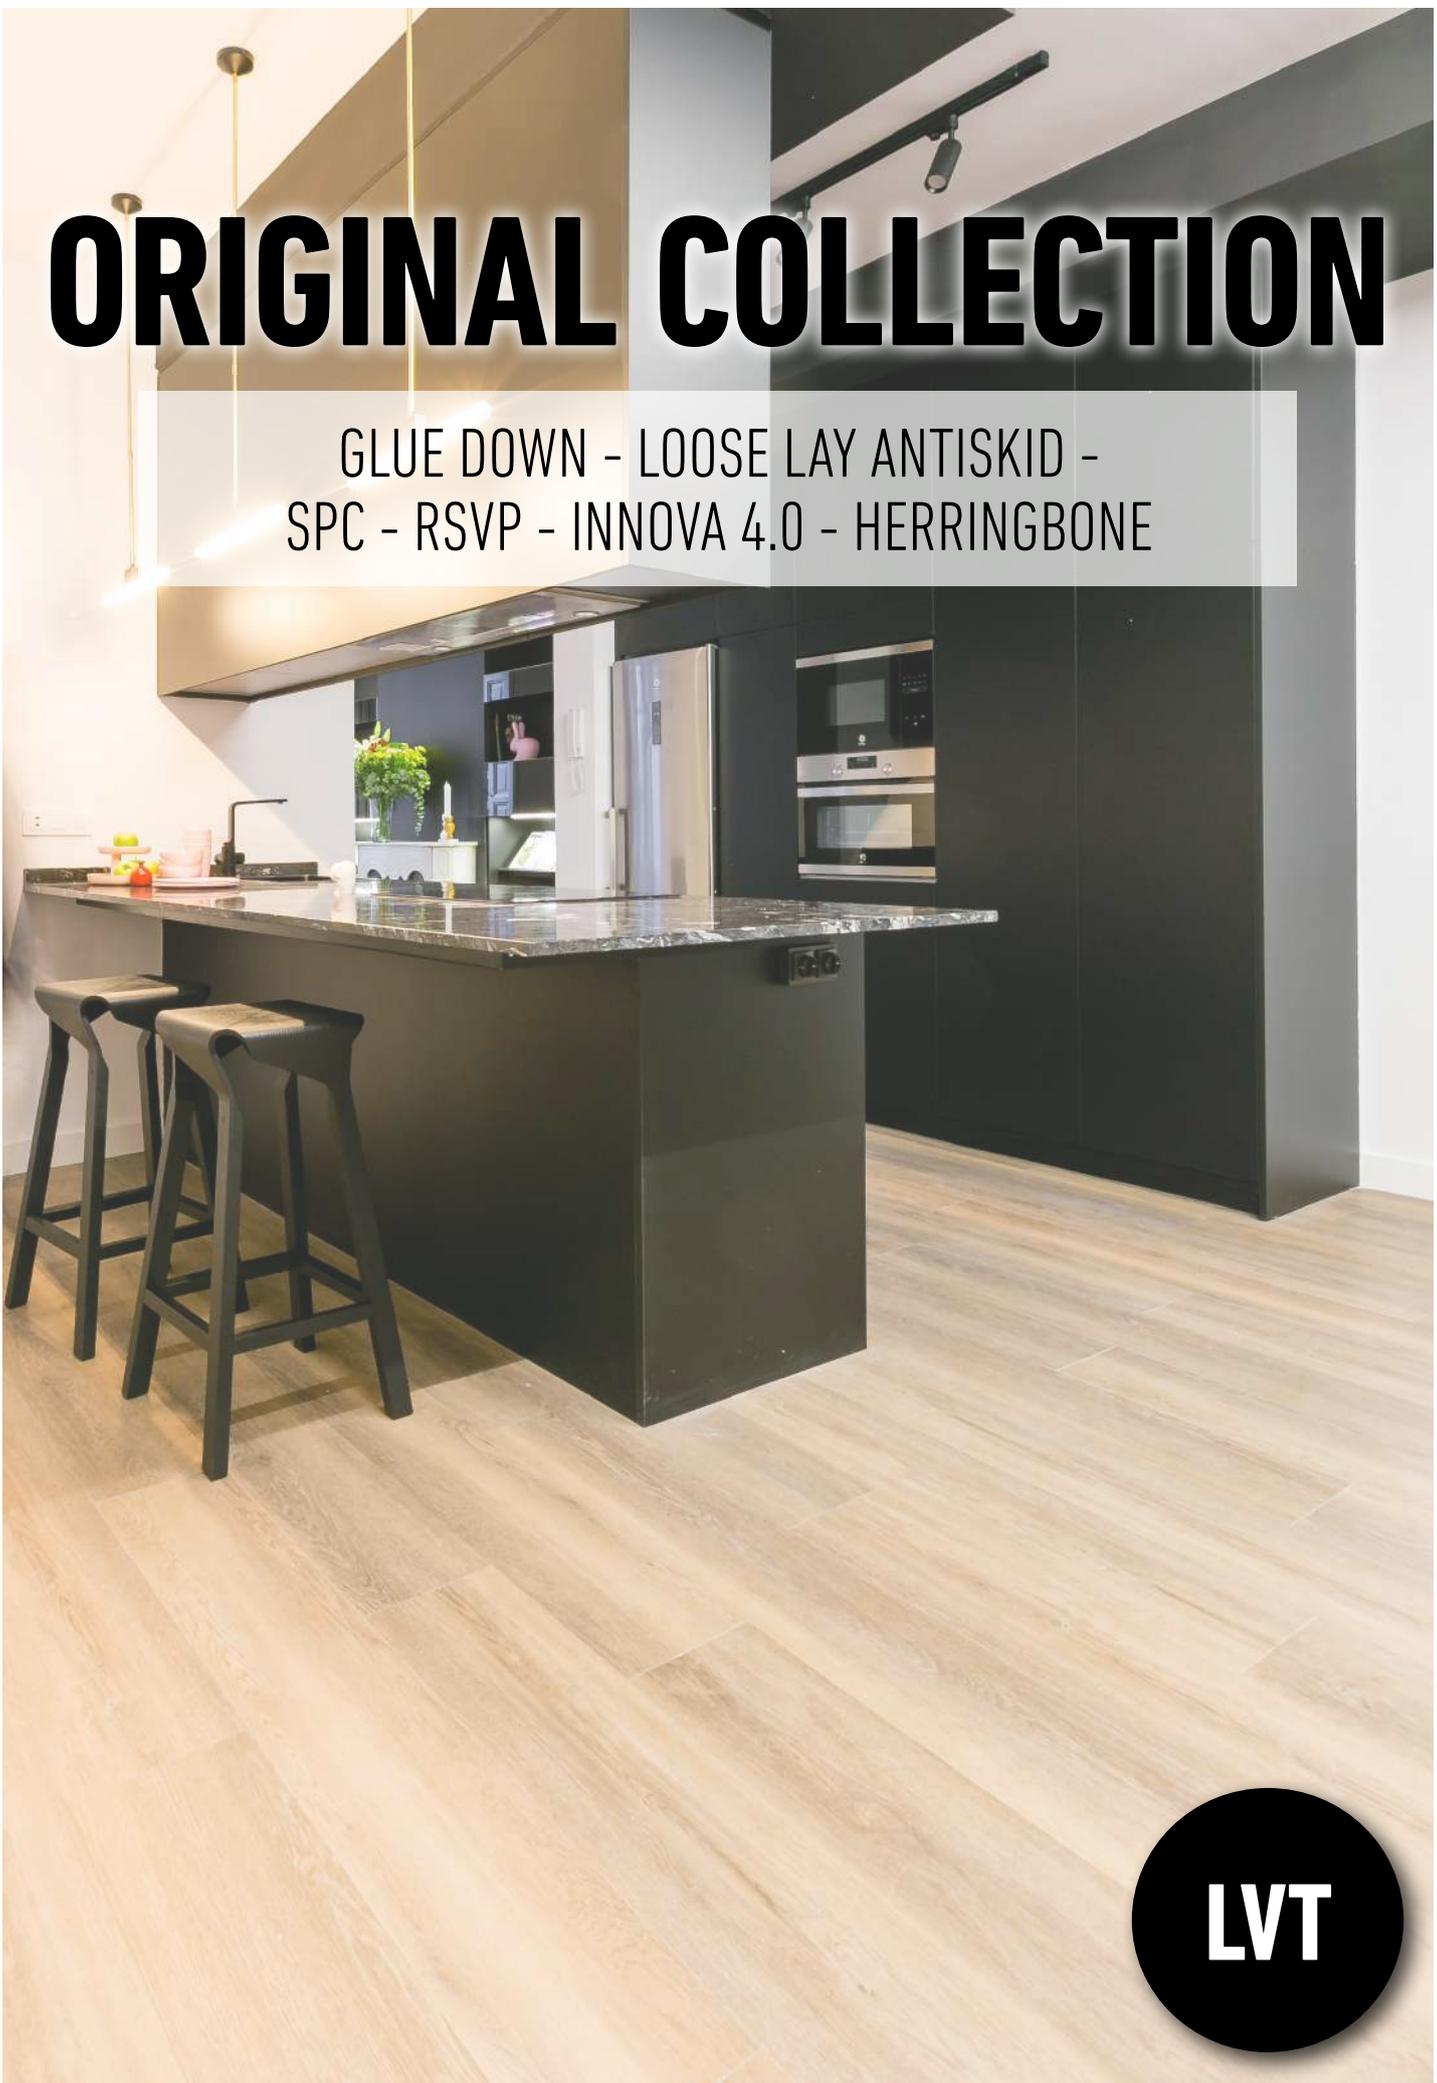

LVT

ORIGINAL COLLECTION SOLUTIONS

GLUING SYSTEM



GLUE DOWN **G**

- Traditional Dry Back LVT for Glue Down
- 100% waterproof
- No dilatation gap/skirting required
- Leveller is required


SELF-LAYING SYSTEM



LOOSE LAY ANTISKID **L**


- Easy to replace
- Self-leveling underlay is required
- 50% faster installation
- Installation without longitudinal and transversal joints

CLICK SYSTEM **UNICLIC**



SPC **S**

- 100% Waterproof
- Base film integrated
- Perfect stability and impact resistance
- Installation up to 120 m² without dilatation joints



RSVP **R**

- 100% Waterproof
- Base film integrated
- Perfect stability and impact resistance
- Installation up to 120 m² without dilatation joints
- Higher sound reduction

MORE REALISTIC FINISHES

GLUING OR CLICK SYSTEM **UNICLIC**



INNOVA 4.0 **I**

- 100% Waterproof
- Base film required
- Perfect stability and impact resistance
- Installation up to 120 m² without dilatation joints

MORE ECONOMICAL



HERRINGBONE **H**

- 100% Waterproof
- Base film required
- Perfect stability and impact resistance
- Installation up to 100 m² without dilatation joints
- Piece by piece installation for greater realism

HERRINGBONE INSTALLATION

ORIGINAL COLLECTION FORMATS



DECORS

1220 x 220 mm

1229 x 159 mm

1219,2 x 228,6 mm

WOOD

914,4 x 914,4 mm

609,6 x 457,2 mm

610 x 304 mm

CEMENT

GLUE DOWN

ORIGINAL COLLECTION

TECHNICAL DATA SHEET



- ① High protection and resistance PU layer
- ② Layer of transparent PVC 0,55mm
- ③ Printed Decor
- ④ PVC reinforced with fiberglass

Characteristics	Test	Glue Down
Classification	EN 16511	23/33/41
Dimensions	EN 427	1229 x 159 mm 609,6 x 457,2 mm (ref: 1304 & 1305)
Thickness	EN 430	3 mm
Weight	EN 430	6,61 kg/m ² 5,85 kg/m ² (ref: 1304 & 1305)
Abrasion Resistance	EN 660-2:1999+2003 EN 649:2011	T/FV < 2.0
Residual Indentation	EN 433	max. 0,03 mm
Chemical Resistance	EN 438	Grade 5
Fire Resistance	EN 13501-1	Class BFLs1 (B1)
Dimensional Stability	ISO 23999	≤ 0,12 %
UV Resistance	ISO 105	≥ Grade 6
Antistatic Performance	EN 1815	0,6 KV
Water Resistance	EN 317	0% Swelling
Slip Resistance	EN12633	Class 2
	DIN 51130	R10
Formaldehyde emission	EN 717	E1
Curving	ISO 23999	≤ 1,20 mm
Peel Resistance	ISO 24345	≥50N/5cm
Anti-scratches	-	≥2500g
Acoustic Performance	EN ISO 717-2	ΔLw= 15 dB
Cigarette burn resistance	EN 438 - 2	Class 3
Flexibility	EN 435	20 mm
Castor Chair	EN 425	Suitable for type W



EN 12633
DIN 51130



EN 13501-1



EN 717



ISO 23999



EN 1815



EN 438



EN ISO 717-2



ISO 105



EN 433



EN 317


LOOSE LAY ANTISKID

TECHNICAL DATA SHEET

ORIGINAL COLLECTION



EASY TO
REPLACE

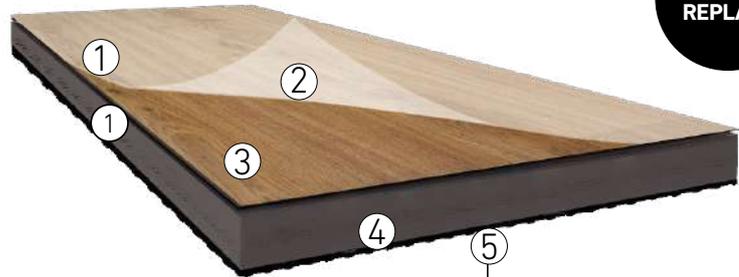

- ① High protection and resistance PU layer
- ② Layer of transparent PVC 0,55mm
- ③ Printed Decor
- ④ PVC reinforced with fiberglass
- ⑤ Backing PVC with micro antiskid




Microbevel 4 sides

**Suction pad system
antiskid underlayment**



Characteristics	Test	Loose Lay Antiskid
Classification	EN 16511	23/33/41
Dimensions	EN 427	1219,2 x 228,6 mm 914,4 x 914,4 mm (ref: 1304 & 1305)
Thickness	EN 430	5 mm
Weight	EN 430	9,74 kg/m ² 9,59 kg/m ² (ref: 1304 & 1305)
Abrasion Resistance	EN 660-2:1999+2003 EN 649:2011	T/FV < 2.0
Residual Indentation	EN 433	≤0.10mm
Chemical Resistance	EN 438	Grade 5
Fire Resistance	EN 13501-1	Class BFLs1 (B1)
Dimensional Stability	ISO 23999	≤ 0,12 %
UV Resistance	ISO 105	≥ Grade 6
Antistatic Performance	EN 1815	0,6 KV
Water Resistance	EN 317	0% Swelling
Slip/Slide resistance	EN12633	Class 2
	DIN 51130	R10
Formaldehyde emission	EN 717	E1
Curving	ISO 23999	≤ 1,20 mm
Peel Resistance	ISO 24345	≥50N/5cm
Anti-scratches	-	≥2500g
Acoustic Certification	EN ISO 717-2	ΔLw= 15 dB
Cigarette burn resistance	EN 438 - 2	Class 3
Flexibility	EN 435	20 mm
Castor Chair	EN 425	Suitable for type W

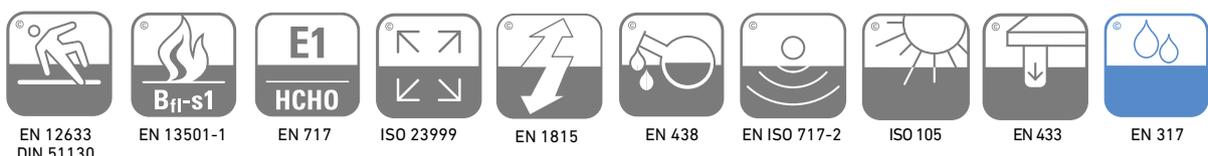

SPC

ORIGINAL COLLECTION

TECHNICAL DATA SHEET



PVC LAYER
0,55 mm


- ① High protection and resistance PU layer
- ② Layer of transparent PVC 0,55mm
- ③ Printed Decor
- ④ Rigid PVC 3,5 mm
- ⑤ Foam 1,5mm



Produced under license of Unilin - EP nr. 0843763/0.5, patent nr. 6.006.486
Installation up to 120m² without expansion joints. Maximum 12m length / 10m width.

Characteristics	Test	SPC
Classification	EN 16511	23 /33
Dimensions	EN 427	1220 x 220 mm 610 x 305 (ref: 1304 & 1305)
Thickness	EN 430	5,5 mm
Weight	EN 430	7,80 Kg/m ²
Abrasion Resistance	EN 660-2	≤0.015g/1000r
Residual Indentation	ISO 24343-1	≤0.10mm
Chemical Resistance	EN 438	Grade 5
Fire Resistance	EN 13501-1	Class BFLs1 (B1)
Dimensional Stability	ISO 23999	≤ 0,12 %
UV Resistance	ISO 105	≥ Grade 6
Antistatic Performance	EN 1815	< 2kv
Water Resistance	EN 317	0% Swelling
Slip/Slide resistance	EN12633	Class 2
	DIN 51130	R10
Formaldehyde emission	EN 717	E1
Curving	ISO 23999	≤ 1,20 mm
Peel Resistance	ISO 24345	≥50N/5cm
Anti-scratches	-	≥2500g
Acoustic Certification	EN ISO 717-2	ΔLw= 17 dB
Cigarette burn resistance	EN 438-2	Class 3
Locking Strength	ISO 24334	450 kg/ml
Thermal Resistance*	EN12664	0,08m ²
Impact Resistance	EN1534	7,4 Kgf/mm ³

*Suitable for radiant heating and cooling

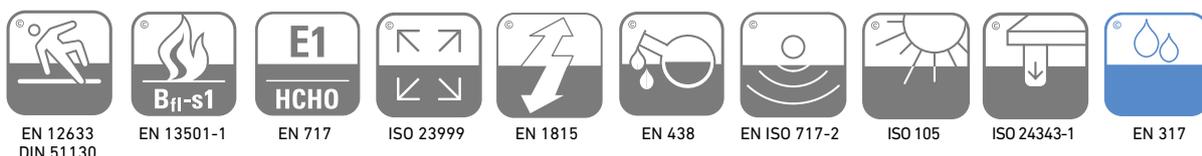


RSVP

ORIGINAL COLLECTION

TECHNICAL DATA SHEET



PVC LAYER
0,55 mm

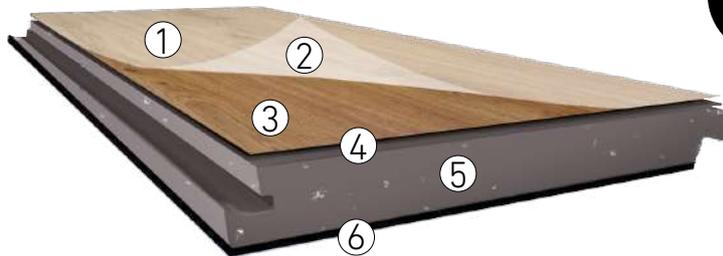


- ① High protection and resistance PU layer
- ② Layer of transparent PVC 0,55mm
- ③ Printed Decor
- ④ Vinyl layer
- ⑤ Rigid PVC 4,5mm
- ⑥ Foam 2mm



Produced under license of Unilin - EP nr. 0843763/0/5. patent nr. 6.006.486
Installation up to 120m² without expansion joints. Maximum 12m length / 10m width.

Characteristics	Test	RSVP
Classification	EN 16511	23 / 33
Dimensions	EN 427	1220 x 220 mm
Thickness	EN 430	7 mm
Weight	EN 430	9,90 Kg/m ²
Abrasion Resistance	EN 660-2	≤0.015g/1000r
Residual Indentation	ISO 24343-1	≤0.10mm
Chemical Resistance	EN 438	Grade 5
Fire Resistance	EN 13501-1	Class BFLs1 (B1)
Dimensional Stability	ISO 23999	≤ 0,12 %
UV Resistance	ISO 105	≥ Grade 6
Antistatic Performance	EN 1815	< 2kv
Water Resistance	EN 317	0% Swelling
Slip/Slide resistance	EN12633	Class 2
	DIN 51130	R10
Formaldehyde emission	EN 717	E1
Curving	ISO 23999	≤ 1,20 mm
Peel Resistance	ISO 24345	≥50N/5cm
Anti-scratches	-	≥2500g
Acoustic Certification	EN ISO 717-2	ΔLw= 18 dB
Cigarette burn resistance	EN 438 - 2	Class 3
Locking Strength	ISO 24334	490 kg/ml
Thermal Resistance*	EN12664	0,08m ²
Impact Resistance	EN1534	7,4 Kgf/mm ³


*Suitable for radiant heating and cooling

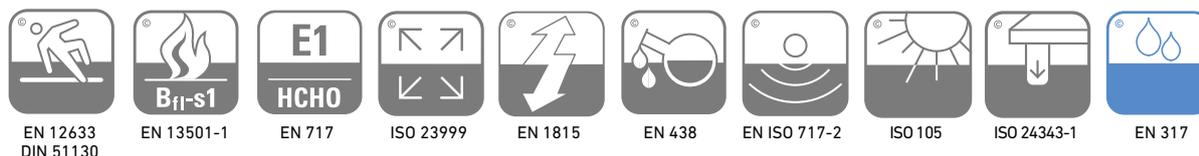

INNOVA 4.0

ORIGINAL COLLECTION

TECHNICAL DATA SHEET

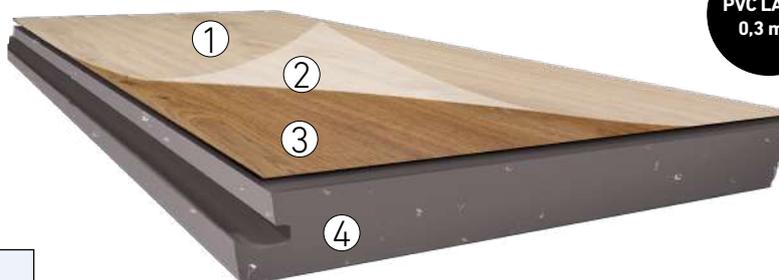

**PVC LAYER
0,3 mm**

- ① High protection and resistance PU layer
- ② Layer of transparent PVC 0,3mm
- ③ Printed Decor
- ④ Rigid PVC 3,7 mm

OPTIONAL VINYL FOAM:

This material can be installed click system with 1.5mm vinyl foam (review lvt complements) or gluing system.



Produced under license of Unilin - EF nr. 0863763/2/5, poram nr. 6.006.456
Installation up to 120m² without expansion joints. Maximum 12m length / 10m width.

NOTE: Innova 4.0 solution is the same material as SPC but layer of transparent PVC has a 0.3mm, Rigid PVC has a 3.7mm and does not contain foam.

Characteristics	Test	INNOVA 4.0
Classification	EN 16511	23 /32
Dimensions	EN 427	1220 x 220 mm
Thickness	EN 430	4 mm
Weight	EN 430	8,40 Kg/m ²
Abrasion Resistance	EN 660-2	≤0.015g/1000r
Residual Indentation	ISO 24343-1	≤0.10mm
Chemical Resistance	EN 438	Grade 5
Fire Resistance	EN 13501-1	Class BFLs1 (B1)
Dimensional Stability	ISO 23999	≤ 0,12 %
UV Resistance	ISO 105	≥ Grade 6
Antistatic Performance	EN 1815	< 2kv
Water Resistance	EN 317	0% Swelling
Slip/Slide resistance	EN12633	Class 2
	DIN 51130	R10
Formaldehyde emission	EN 717	E1
Curving	ISO 23999	≤ 1,20 mm
Peel Resistance	ISO 24345	≥50N/5cm
Anti-scratches	-	≥2500g
Acoustic Certification	EN ISO 717-2	ΔLw= 10 dB
Cigarette burn resistance	EN 438-2	Class 3
Locking Strength	ISO 24334	450 kg/ml
Thermal Resistance*	EN12664	0,08m ²
Impact Resistance	EN1534	7,4 Kg/mm ³

*Suitable for radiant heating and cooling



EN 12633
DIN 51130



EN 13501-1



EN 717



ISO 23999



EN 1815



EN 438



EN ISO 717-2



ISO 105



ISO 24343-1



EN 317

HERRINGBONE


ORIGINAL COLLECTION

TECHNICAL DATA SHEET




**PVC LAYER
0,55 mm**

- ① High protection and resistance PU layer
- ② Layer of transparent PVC 0,55mm
- ③ Printed Decor
- ④ Vinyl layer
- ⑤ Rigid PVC 4,5mm

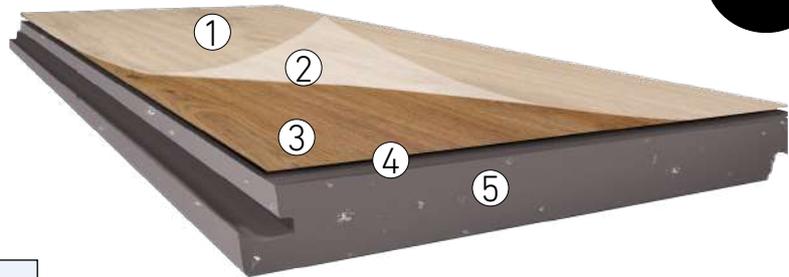

OPTIONAL VINYL FOAM:
This material can be installed click system with 1.5mm vinyl foam (review lvt complements) or gluing system.



HERRINGBONE
Installation System



Produced under license of Unilin - EP nr. 0843763/US, patent nr. 6.006.486
Installation up to 100m² without expansion joints. Maximum 10m length / 10m width.

Characteristics	Test	HERRINGBONE
Classification	EN 16511	23 /33
Dimensions	EN 427	110 x 610 mm
Thickness	EN 430	5 mm
Weight	EN 430	9,75 Kg/m ²
Abrasion Resistance	EN 660-2	≤0.015g/1000r
Residual Indentation	ISO 24343-1	≤0.10mm
Chemical Resistance	EN 438	Grade 5
Fire Resistance	EN 13501-1	Class BFLs1 (B1)
Dimensional Stability	ISO 23999	≤ 0,12 %
UV Resistance	ISO 105	≥ Grade 6
Antistatic Performance	EN 1815	< 2kv
Water Resistance	EN 317	0% Swelling
Slip/Slide resistance	EN12633	Class 2
	DIN 51130	R10
Formaldehyde emission	EN 717	E1
Curving	ISO 23999	≤ 1,20 mm
Peel Resistance	ISO 24345	≥50N/5cm
Anti-scratches	-	≥2500g
Acoustic Certification	EN ISO 717-2	ΔLw= 18 dB
Cigarette burn resistance	EN 438 - 2	Class 3
Locking Strength	ISO 24334	490 kg/ml
Thermal Resistance*	EN12664	0,08m ²
Impact Resistance	EN1534	7,4 Kgf/mm ³

*Suitable for radiant heating and cooling



EN 12633
DIN 51130



EN 13501-1



EN 717



ISO 23999



EN 1815



EN 438



EN ISO 717-2



ISO 105



ISO 24343-1



EN 317

original collection
WOOD

Dimensions/Solutions

Glue Down 1229 x 159 mm / Loose Lay Antiskid 1219,2 x 228,6 mm /
 SPC, RSVP & INNOVA 4.0 1220 x 220 mm / Herringbone 110 x 610 mm



1201 White Washed *
GLRIH



1202 Grey Oak *
GLRIH



1205 Natural Oak *
GLRIH



1702 Tradition Classic *
GLRIH



1703 Trad. Lime Washed
GLSH



1203 Vulcano
GLSH



1809 Excelsior Grey
GLS



3009 Polar Oak
GLS



3010 Old Oak
GLS



3016 Ash Oak
GLS



3019 Whiskey Oak
GLS



3020 Walnut
GLS



1204 White Oak
GLR

* All solutions have a layer of transparent PVC 0,55mm except the Innova 4.0 solution which has 0,3mm

original collection
CEMENT

Dimensions/Solutions

Glue Down 609,6 x 457,2 mm /
Loose Lay Antiskid 914,4 x 914,4 mm / SPC 610 x 305 mm



1305 Cement Light

GLS



1304 Cement Dark

GLS

HERRINGBONE HIGH TECHNICAL QUALITIES MAKE IT A UNIQUE PRODUCT:

- 100% waterproof
- Very high noise reduction level
- Does not transmit static electricity
- Silent and comfortable thanks to its flexibility and thickness
- Very realistic textures
- Installation in click or gluing system
- Allows daily cleaning for proper disinfection
- Residential or commercial application

TRENDING
SOLUTION



LVT ACCESSORIES

SKIRTING

CLICK SKIRTING

Available in every Floover decor. Same length as flooring range selected.

45 x 11 x 915 /1235 /1815mm

70 x 11 x 915 /1235 /1815mm



NEW CLICK SKIRTING

Available in very Floover decor. Same length as flooring range selected.

56 x 15 x 915 /1235 /1815 mm




- ① Printed Design
- ② Vinyl
- ③ HDF/ SplasH2O



STAIRNOSE AND TRANSITION

STAIRNOSE 1 (WITH NOSE)

Same designs and textures as flooring. Perfect joint with Unilin Clic, it means there is no lip over. Perfect even connection to the flooring. Same length and thickness as flooring piece.

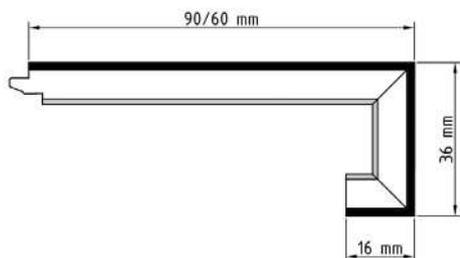

STAIRNOSE 2 (WITHOUT NOSE)

Same designs and textures as flooring. Perfect joint with Unilin Clic, it means there is no lip over. Perfect even connection to the flooring. Same length and thickness as flooring piece.



LVT ACCESSORIES

STAIRNOSE CLASSIC 1A

Same designs and textures as flooring. Perfect joint with Unilin Clic, it means there is no lip over.



STAIRNOSE CLASSIC WITH SIDE FINISHING 1B

Same designs and textures as flooring. Perfect joint with Unilin Clic, it means there is no lip over.



STAIRNOSE WITH NOSE 2A

Same designs and textures as flooring. Perfect joint with Unilin Clic, it means there is no lip over.




STAIRNOSE WITH NOSE AND SIDE FINISHING 2B

Same designs and textures as flooring. Perfect joint with Unilin Clic, it means there is no lip over.



RISER WITH SIDE FINISHING


Same designs and textures as flooring.

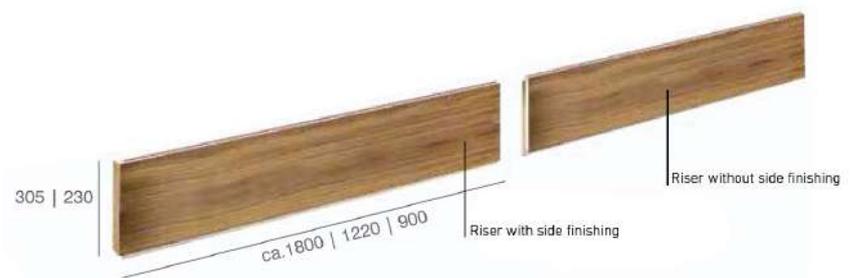

LVT ACCESSORIES



TRANSITION OVERLAP

Available in every Floover reference. Same level as the flooring.
Same length and thickness as flooring pieces.

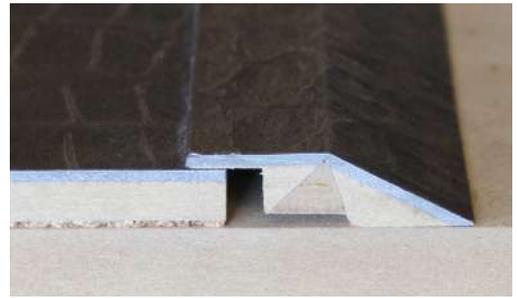

DILATATION JOINT

Same design and textures as flooring. Same length as floor planks.

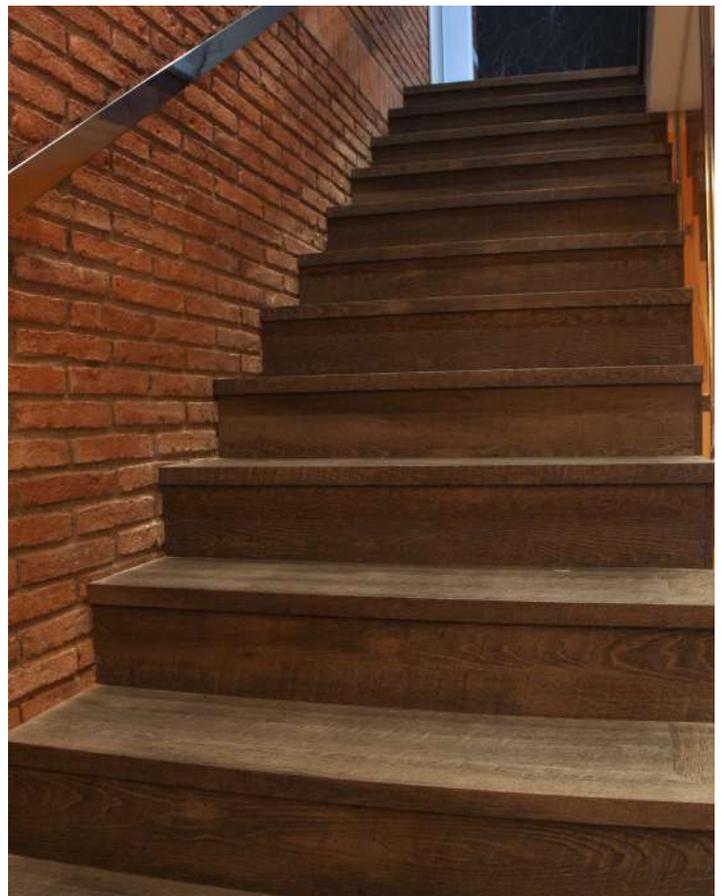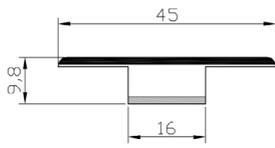

LVT COMPLEMENTS


FLOOVERFLEX



Floor underlayment foam for water vapour control. Specially developed for Floover SplasH₂O and SplasH₂O Light solutions for installations in wet areas it reduces sound transmission and improves heat insulation.

Flooverflex: Vinyl Foam HD-HEPS

- No smashing effect (sound and pressure)
- Evaporation effect convenient



FLOORER SPLASH₂O AND SPLASH₂O LIGHT WITH FLOORERFLEX INTEGRATED:

A finished product that saves labour and transport cost in just one component.

Characteristics	Test	Flooverflex
Material		HD-HEPS
Dimensions	EN 822	635 x 930 / 1245 x 954 mm
Thickness	EN823	1,5 mm
Load Resistance (in compression 0,5mm)	EN 826	≥ 200 (-20) kPa (t/m ²)
Thermal resistance	DIN 4108	- 0,039 m ² Kw
Absorption	EN 12087	< 0,5 Vol. %
Weighted reduction of impact sound's level	ISO 140-8	13 dB
Weighted reduction of acoustic sound's level	CEN TC1276	5 dB
Suitability for underfloor heating		yes **



Fire Resistant



Silent



Waterproof


* Remarks: All above values are determined at laboratory conditions and with defined laboratory test sets. They can deflect in praxis or with other system components. Therefore, all performance data tolerances are possible due to uncertainty of the test method. The above statements reflect the current state of our knowledge, providing information about our products and their application. Therefore they cannot guarantee particular product features or suitability for a specific application.

** Recommendation: The effective audibility for the application underfloor heating have been identified based on system component. The recommendation of BVF should not exceed the total flooring system of 0,15 m² K/W.

POLYPROPYLENE FILM

To install Floover flooring, just place the Polypropylene Film on the ground and seal the unions with masking tape, to ensure the vapour barrier as per the European rules. This is essential to ensure the proper performance of the flooring.

100 gr/m² - 8,5 kg / 100 m² x 100ml

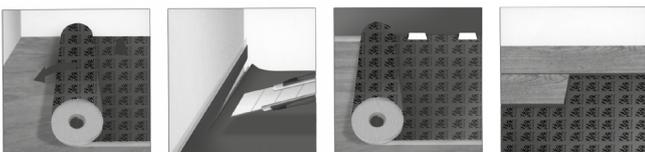

VINYL FOAM

Suitable to install Floover Innova 4.0 and Herringbone. Characteristics of this material:

Dimensions: 1,20x20 ml Thickness: 1,5mm
 Density: 67 Db: 19
 M2/roll: 24 W/m°K: 0,041




FLOORING & WALLS

WOVEN

VINYL TEXTILE



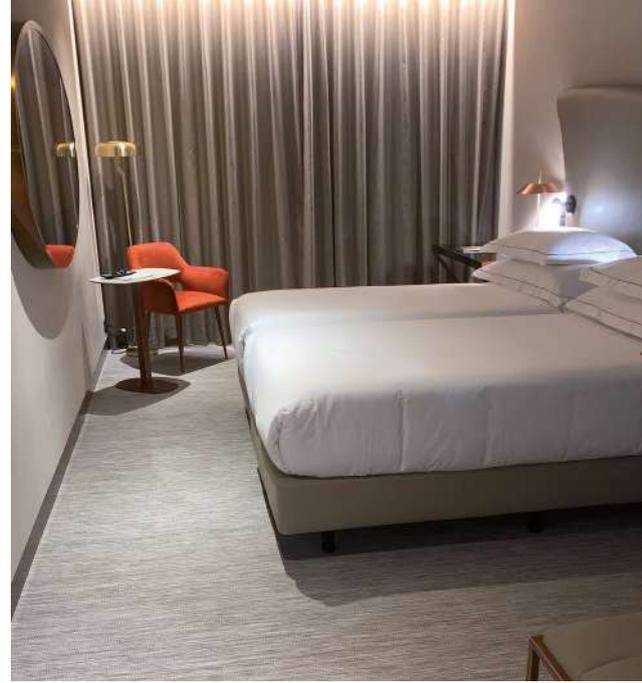

THE TEXTILE WITHOUT COMPROMISES



Floover Woven is an exclusive, inviting and unique woven vinyl product. **The feeling of the textile is unmistakable, practically organic but the flooring, nevertheless, has all the advantages of vinyl:** wear-resistant, easy to handle compared to textile floorings and simple to install.

Woven combines the craftsmanship and creativity of the past with the possibilities offered by modern technology. A collection with a completely new inspiration, a strong textile feeling, high resistance and a unique look. The **elasticity and acoustic** insulation of its structure give this product great qualities of underfoot comfort.

The woven fabric has variations in tone depending on the light, giving added value and highlighting its beauty, resulting in an optical effect.



FLOOVER WOVEN FEATURES

EASY TO MAINTAIN

Floover Woven is a 100% washable product. It is very resistant to stains and even color degradation. So that no special maintenance products are required. It can be easily maintained with neutral cleaner, and it is also suitable for scrubbing machines.

ELASTICITY

Floover Woven flexibility makes it easy to handle and bend; this makes it adaptable to the needs of each client and very comfortable to walk on it. The Glue Down version adapts perfectly to every kind of surfaces as well as flooring, walls or furniture.

HEAT AND UV RESISTANCE

Floover Woven is very stable with temperature changes and has a big UV resistance. As a result, Floover Woven can be installed in sunny places and outdoor. It is also suitable for underfloor heating and cooling systems.

RESISTANT TO SCRATCHES

Floover Woven threads are composed of a core of polyester and fiberglass, encapsulated in vinyl to reinforce the resistance and wear. Floover Woven solutions are appropriate for residential and commercial use. This resistance also allows using chairs with soft polyamide castors.

ANTI-BACTERIA

Due to the structure and composition of the material and the easiness to clean, it is impossible to retain mites and other bacteria. Also fungus are not able to grow on Woven because it does not retain humidity.

WOVEN ORIGINAL

ROLLS - LOOSE LAY - ACOUSTIC LOOSE LAY -
WALLS - SHEETS

WOVEN

WOVEN ORIGINAL SOLUTIONS

GLUING SYSTEM



ROLLS

- Woven vinyl for glue down
- 100% waterproof
- Roll format
- Leveler is required
- No dilatation gap/skirting required



WALLS

- Solution for walls
- 100% waterproof
- Roll format
- Easy to install with permanent glue
- Fire retardant



SHEETS

- Solution for flooring or walls
- Tile format
- 100% waterproof
- Easy to install with permanent glue
- Installation combining two colours

VERY ECONOMICAL

SELF-LAYING SYSTEM



LOOSE LAY

- Installation with removable or permanent glue
- Easy to install and replace
- Antistatic
- Easy access to the subfloor




ACOUSTIC LOOSE LAY

- Two sizes: XXL format for chessboard installation and other format for herringbone installation
- Installation with permanent glue
- Easy to install and replace
- Antistatic
- Easy access to the subfloor
- Greater sound insulation

The fiberglass composition of the woven makes it a material **free of mites and bacteria**, suitable to be installed in any space, complying with all hygiene requirements.


WOVEN ORIGINAL FORMATS

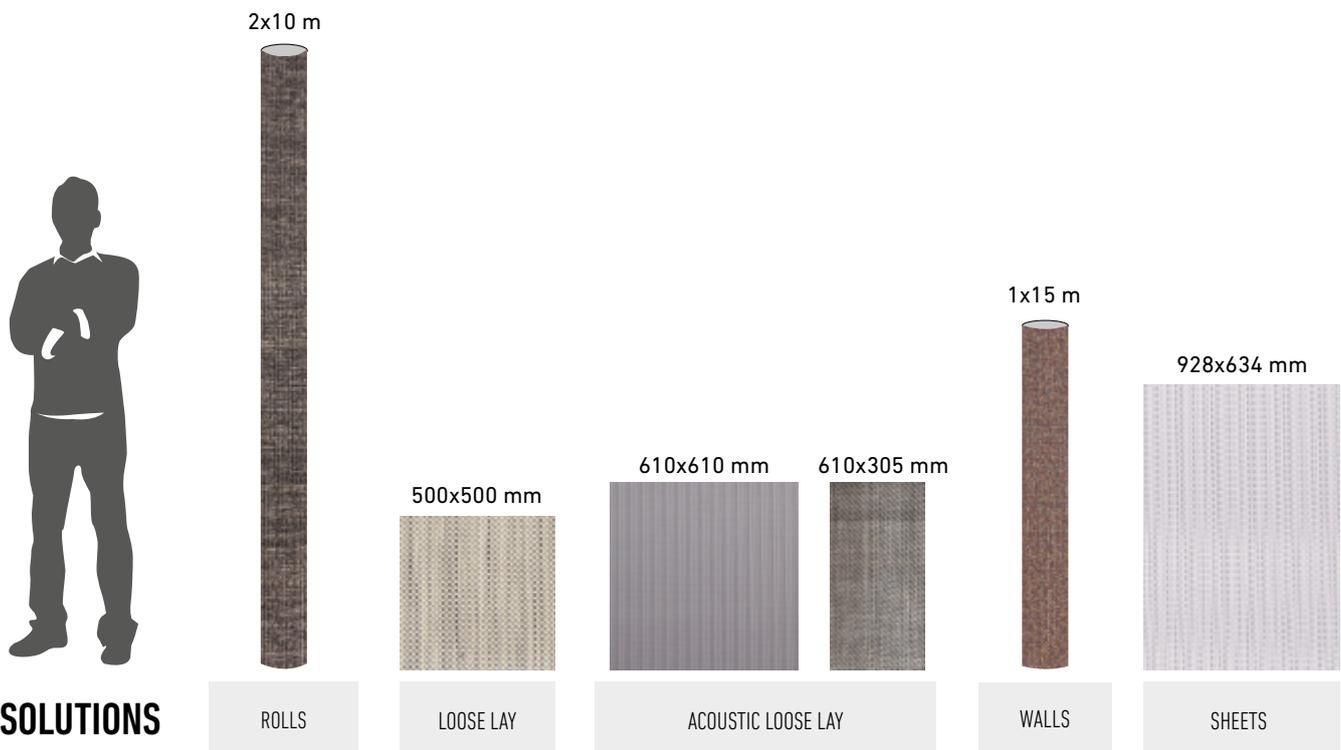


WOVEN ROLLS

ORIGINAL COLLECTION

TECHNICAL DATA SHEET



- ① Woven Vinyl:
 - 96% PVC,
 - 1,5% polyester
 - 2,5% Glassfiber
- ② PVC Rigid with glassfiber reinforce

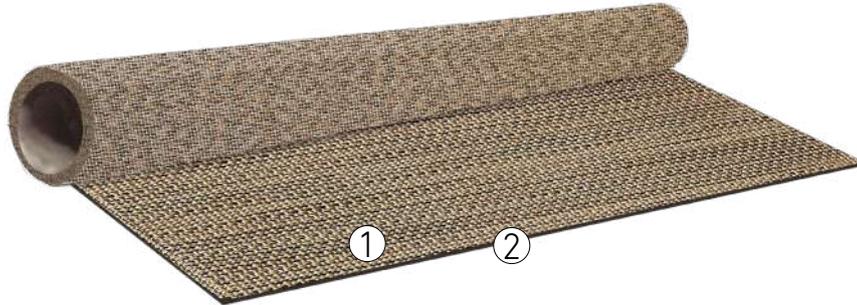

OPTIONAL
Ez Care coating

Characteristics	Test	Woven Rolls (Original Range)
Classification	EN 685	23/33
Dimensions	EN 427	2 x 10 m
Thickness	EN 430	from 2,31 to 2,80 mm (depending on the pattern)
Weight	EN 430	from 2,95 to 3,37 kg/m ² (depending on the pattern)
Stains resistance	-	Sanitized protection (EZ Care) optional
Fire resistance	EN 13501-1	Class BFLs1 (B1)
Thermal resistance	EN 12664	0,0639 m ² K/W*
Thermal conductivity	En 12667 (2011)	0,0416 W/m.k
Formaldehyde emission	EN 717-1	E1
UV Resistance	ISO 105 - B02	> Grade 6
Fungus test	ASTM G21	No Growth after 28 days
Skew and Bow	EN 427	Max 2%
Slip/Slide resistance	EN 13893	<0,3
	DIN 51130	R10
Residual Indentation	EN 433:1994	0.08mm
Dimensional Stability	EN 434:1994	0.05% (X + Y direction)
Curling	EN 434:1994	1.5mm
Antistatic Performance	EN 1815	< 2 kV
Acoustics Performance	EN ISO 717-2	Lw=14dB Cl=-9dB
Castor chair suitability**	EN 985	Continuous use

* Suitable for underfloor heating system ** Suitable for soft polyamide wheels (type W)



NOTE: Being a textile product, this range has a tolerance of 2% asymmetry, known as skew and bow effect. Maximum fraying tolerance of 5 inner-yarns/ml guaranteed. It has all the textile properties and these may suffer variations or changes with time that may affect and alter the colour.

WOVEN ROLLS

ORIGINAL COLLECTION

TECHNICAL PROPERTIES

1. BATCH LOT:

Because of the textile weaving process, the batch control must be considered, since it is possible to find some difference in tonality from one batch to another.

Floover controls these variations and identifies each tonality in the labels. When installing the material, finish one production lot first before starting the next one. Do not mix rolls from different batches

Special designs can be considered, please ask your salesman or customer service for specific offers. The minimum quantity for special designs is 1000 m² and the price will be adjusted too.

2. ROLL WIDTH:

The width of the roll is minimum 2000 mm, with possible + 50 mm. Special sizes / slight variations of the size will be discussed upon order

A special width can be considered, please ask your salesman or customer service for specific offers.

Also pallet system will be affected.

3. ROLL LENGTH:

The length of the roll is min. 10 m, some extra length can be considered in some cases.


Special lengths can be considered, please ask your salesman or customer service for specific offers.

Also pallet system will be affected.

4. SKEW AND BOW:

Due to the textile manufacturing process, there could appear certain deviations that would affect the final result of the roll.

Deviations lower than 2 % must be accepted, it means that for every lineal meter the thread must not be deviated more than 20 mm.

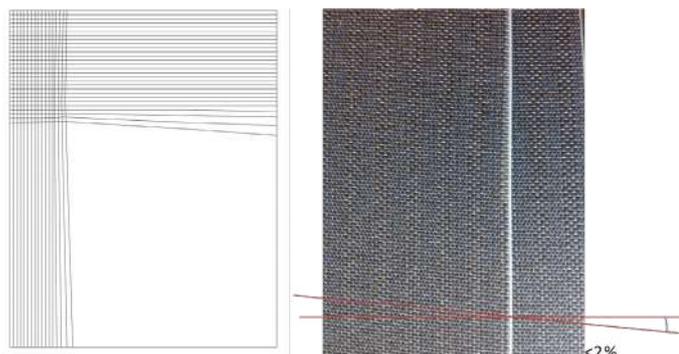

5. FLAWS:

Flaws must be accepted in the maximum quantity of 1 per roll, and always considering really minor and just visual effect. Flaws will be marked with a red strip on the sides and also indicated in the Flaw label (width the position in ml affected from the inner core).



Flaws According to Levi's Four Point System Criteria

When a Flaw is detected, in that roll will be added 0,5 ml as a compensation.

5. TONE DIFFERENCES ON THE ROLL:

Small differences in tonality may occur within the same roll, this effect is due to the production system, not to the color of the thread or to the tone or batch of the coil; When we manufacture the fabric we do it in a coil 2 meters wide by 250 meters long (500m²), the thread tension may vary depending on the tension of the threads and the mechanical winding, that is, small tension differences may appear in the fabric that can create an optical effect of change of tonality in some areas of the coil along or across the width and is only visualized from one side of the roll because it is a visual effect of reflection of light, from the other side you will not see the difference. This effect is normal and common in any woven product. It is not correct when this effect is seen from all sides of the roll, in this case, the installer must cut the affected piece, discard it and join with another coil.

6. DIRECTION OF THE ROLL:


For a consistency in the design, it is important to maintain the same arrow direction on every roll. This arrow is printed on the back of each roll.



WOVEN LOOSE LAY



ORIGINAL COLLECTION

TECHNICAL DATA SHEET



- ① Woven Vinyl:
 - 96% PVC,
 - 1,5% polyester
 - 2,5% Glassfiber

- ② PVC Rigid with glassfiber reinforce

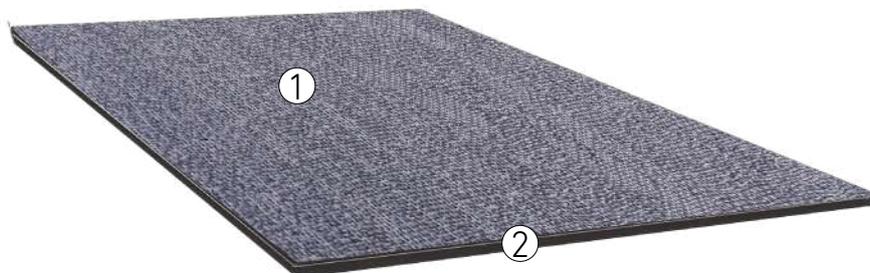


Proper installation:
Chessboard system

ez+
care
OPTIONAL
Ez Care coating

Characteristics	Test	Woven Loose Lay (Original Range)
Classification	EN 685	23/33
Dimensions	EN 427	500 x 500 mm
Thickness	EN 430	from 3,85 to 4,40 mm (depending on the pattern)
Weight	EN 430	from 4,90 to 5,30 kg/m ² (depending on the pattern)
Abrasion resistance	EN 660-1: 99	0,068 mm
	EN 660-2: 99	1,80 mm ³
Stains resistance	-	Sanitized protection (EZ Care) optional
Fire resistance	EN 13501-1	Class BFLs1 (B1)
Thermal resistance	EN 12664	0,0639 m2 K/W*
Thermal conductivity	EN 12667 (2011)	0,0416 W/m.k
Formaldehyde emission	EN 717-1	E1
UV Resistance	ISO 105 - B02	> Grade 6
Fungus test	ASTM G21	No Growth after 28 days
Skew and Bow	EN 427	Max 2%
Slip/Slide resistance	EN 13893	<0,3
	DIN 51130	R10
Residual Indentation	EN 433:1994	0.08mm
Dimensional Stability	EN 434:1994	0.05% (X + Y direction)
Curling	EN 434:1994	1.5mm
Antistatic Performance	EN 1815	< 2 kV
Acoustics Performance	EN ISO 717-2	Lw=14dB Cl=-9dB
Castor chair suitability**	EN 985	Continuous use

* Suitable for underfloor heating system ** Suitable for soft polyamide wheels (type W)

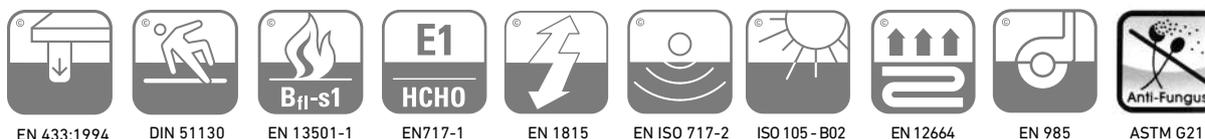


NOTE: Being a textile product, this range has a tolerance of 2% asymmetry, known as skew and bow effect. Maximum fraying tolerance of 5 inner-yarns/ml guaranteed. It has all the textile properties and these may suffer variations or changes with time that may affect and alter the colour.

WOVEN ACOUSTIC LOOSE LAY


TECHNICAL DATA SHEET

ORIGINAL COLLECTION




Greater sound insulation

- ① Woven Vinyl:
 - 96% PVC,
 - 1,5% polyester
 - 2,5% Glassfiber
- ② PVC Rigid with glassfiber reinforce
- ③ Cork + rubber base



FORMAT XXL: 610x610mm

Proper installation:
Chessboard system



FORMAT 610x305mm


Proper installation:
Herringbone installation

**Acoustic base
with cork and rubber**



Characteristics	Test	Woven Loose Lay (Original Range)
Classification	EN 685	23/33
Dimensions	EN 427	610 x 610 mm / 610 x 305 mm
Thickness	EN 430	from 4,40 to 4,80 mm (depending on the pattern)
Weight	EN 430	from 2,10 to 2,30 kg/m ² (depending on the pattern)
Abrasion resistance	EN 660-1: 99	0,068 mm
	EN 660-2: 99	1,80 mm ³
Fire resistance	EN 13501-1	Class CFLs1
Thermal resistance	EN 12664	0,0639 m2 K/W*
Thermal conductivity	EN 12667 (2011)	0,0416 W/m.k
Formaldehyde emission	EN 717-1	E1
UV Resistance	ISO 105 - B02	> Grade 6
Fungus test	ASTM G21	No Growth after 28 days
Skew and Bow	EN 427	Max 2%
Slip/Slide resistance	EN 13893	<0,3
	DIN 51130	R10
Residual Indentation	EN 433:1994	0.08mm
Dimensional Stability	EN 434:1994	0.05% (X + Y direction)
Curling	EN 434:1994	1.5mm
Antistatic Performance	EN 1815	< 2 kV
Acoustics Performance	EN ISO 717-2	Lw=19dB Cl=-9dB
Castor chair suitability**	EN 985	Continuous use

* Suitable for underfloor heating system ** Suitable for soft polyamide wheels (type W)

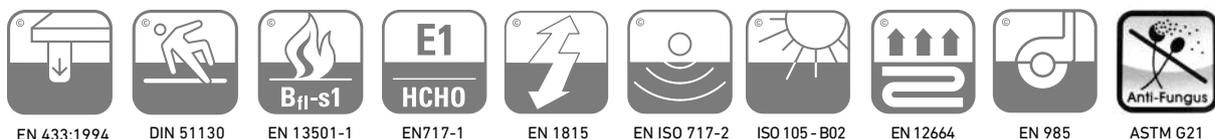

NOTE: Being a textile product, this range has a tolerance of 2% asymmetry, known as skew and bow effect. Maximum fraying tolerance of 5 inner-yarns/ml guaranteed. It has all the textile properties and these may suffer variations or changes with time that may affect and alter the colour.



WOVEN ACOUSTIC LOOSE LAY

TECHNICAL DATA SHEET

ORIGINAL COLLECTION




- ① Woven Vinyl:
 - 96% PVC,
 - 1,5% polyester
 - 2,5% Glassfiber
- ② PVC Rigid with glassfiber reinforce
- ③ Cork + rubber base

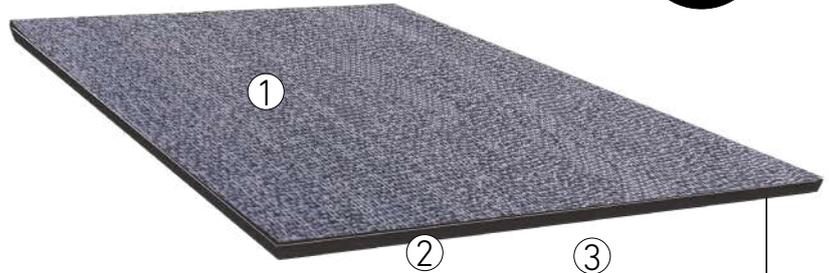

FORMAT XXL: 610x610mm

Proper installation:
Chessboard system



FORMAT 610x305mm


Proper installation:
Herringbone installation

**Acoustic base
with cork and rubber**



Characteristics	Test	Woven Loose Lay (Original Range)
Classification	EN 685	23/33
Dimensions	EN 427	610 x 610 mm / 610 x 305 mm
Thickness	EN 430	from 4,40 to 4,80 mm (depending on the pattern)
Weight	EN 430	from 2,10 to 2,30 kg/m ² (depending on the pattern)
Abrasion resistance	EN 660-1: 99	0,068 mm
	EN 660-2: 99	1,80 mm ³
Fire resistance	EN 13501-1	Class CFLs1
Thermal resistance	EN 12664	0,0639 m2 K/W*
Thermal conductivity	EN 12667 (2011)	0,0416 W/m.k
Formaldehyde emission	EN 717-1	E1
UV Resistance	ISO 105 - B02	> Grade 6
Fungus test	ASTM G21	No Growth after 28 days
Skew and Bow	EN 427	Max 2%
Slip/Slide resistance	EN 13893	<0,3
	DIN 51130	R10
Residual Indentation	EN 433:1994	0.08mm
Dimensional Stability	EN 434:1994	0.05% (X + Y direction)
Curling	EN 434:1994	1.5mm
Antistatic Performance	EN 1815	< 2 kV
Acoustics Performance	EN ISO 717-2	Lw=19dB Cl=-9dB
Castor chair suitability**	EN 985	Continuous use

* Suitable for underfloor heating system ** Suitable for soft polyamide wheels (type W)

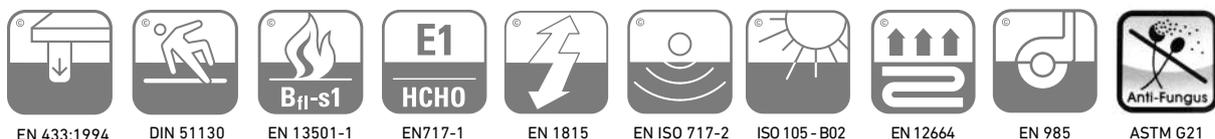


NOTE: Being a textile product, this range has a tolerance of 2% asymmetry, known as skew and bow effect. Maximum fraying tolerance of 5 inner-yarns/ml guaranteed. It has all the textile properties and these may suffer variations or changes with time that may affect and alter the colour.

WOVEN WALLS


ORIGINAL COLLECTION

TECHNICAL DATA SHEET



ONLY FOR WALLS

- ① Woven Vinyl:
 - 90% PVC,
 - 6,2% polyester
 - 3,8% Glassfiber
- ② Non Woven
 - 100% polyester backing

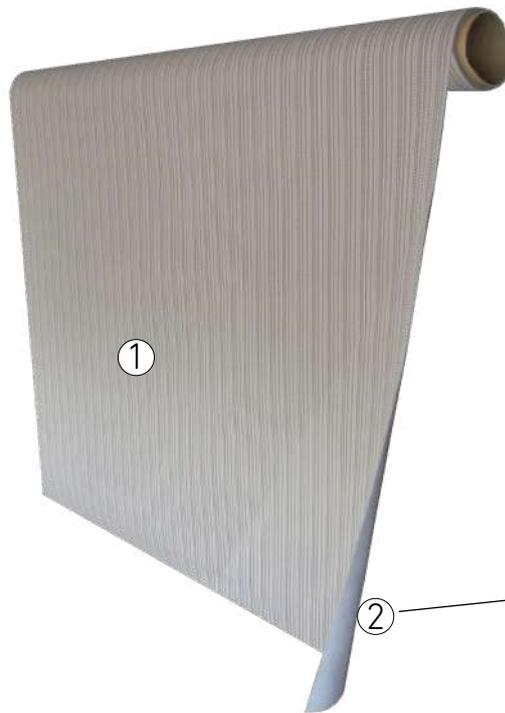

OPTIONAL
Ez Care coating

Characteristics	Test	Woven Walls (Original Range)
Roll width	-	1 m
Roll Length	-	15 m
Thickness	-	From 1,5 to 1,8 mm (depending on the pattern)
Weight	-	From 780 to 1041 g/m ² (depending on the pattern)
Stains resistance	-	Sanitized protection (EZ Care) optional
Fire resistance	EN 13501	B-S1 d0
UV resistance	ISO 105-B02	Grade 6
Fungus test	ASTM G21	No Growth after 28 days
Skew and Bow	EN 427	Max 2%
Curling	EN 434:1994	1,5 mm
Release of Formaldehyde	-	Pass (120mg/kg)
Release of Vinyl Chloride	-	Monomer - Pass (<0.2mg/kg)
Sound Absorption		$\alpha_w=0.05$
Release of dangerous substances (SVHC)	xXMCCM161101593	Pass



EN 13501



ISO 105-B02




ASTM G21

NOTE: Being a textile product, this range has a tolerance of 2% asymmetry, known as skew and bow effect. Maximum fraying tolerance of 5 inner-yarns/ml guaranteed. It has all the textile properties and these may suffer variations or changes with time that may affect and alter the colour.

WOVEN SHEETS



ORIGINAL COLLECTION

TECHNICAL DATA SHEET



WALLS & FLOORING


- ① Woven Vinyl:
 - 96% PVC,
 - 1,5% polyester
 - 2,5% Glassfiber
- ② PVC Rigid with glassfiber reinforce

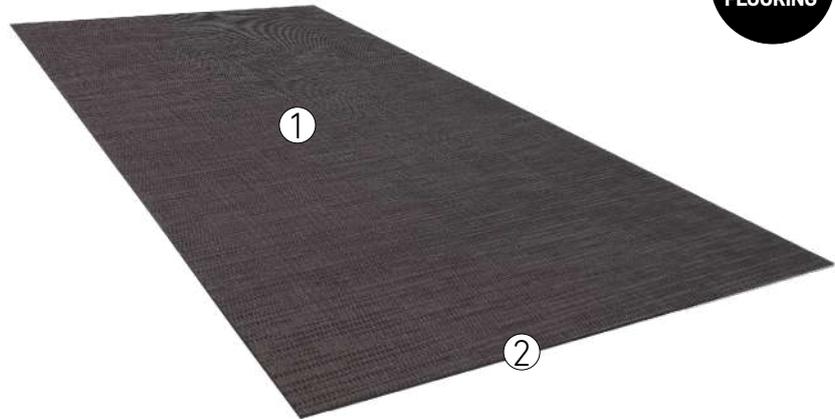

Proper installation:
Chessboard system combining 2 colours

Characteristics	Test	Woven Sheets (Original Range)
Classification	EN 685	23/33
Dimensions	EN 427	928 x 634 mm
Thickness	EN 430	from 1,40 to 1,80 mm (depending on the pattern)
Weight	EN 430	from 1,63 to 1,82 kg/m ² (depending on the pattern)
Abrasion resistance	EN 660-1: 99	0,068 mm
	EN 660-2: 99	1,80 mm ³
Fire resistance	EN 13501-1	Class BFLs1
Thermal resistance	EN 12664	0,0639 m2 K/W*
Thermal conductivity	EN 12667 (2011)	0,0416 W/m.k
Formaldehyde emission	EN 717-1	E1
UV Resistance	ISO 105 - B02	> Grade 6
Fungus test	ASTM G21	No Growth after 28 days
Skew and Bow	EN 427	Max 2%
Slip/Slide resistance	EN 13893	<0,3
	DIN 51130	R10
Residual Indentation	EN 433:1994	0.08mm
Dimensional Stability	EN 434:1994	0.05% (X + Y direction)
Curling	EN 434:1994	1.5mm
Antistatic Performance	EN 1815	< 2 kV
Castor chair suitability**	EN 985	Continuous use

* Suitable for underfloor heating system ** Suitable for soft polyamide wheels (type W)

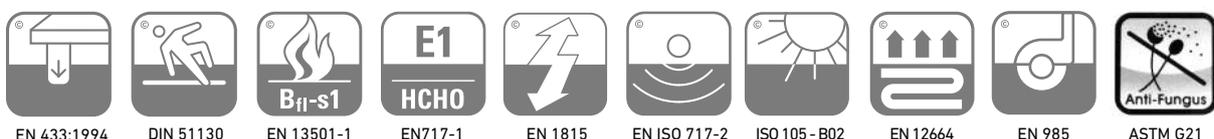


NOTE: Being a textile product, this range has a tolerance of 2% asymmetry, known as skew and bow effect. Maximum fraying tolerance of 5 inner-yarns/ml guaranteed. It has all the textile properties and these may suffer variations or changes with time that may affect and alter the colour.

WOVEN SHAPES


ORIGINAL COLLECTION GLUE DOWN AND LOOSE LAY

ON
INQUIRY
ONLY

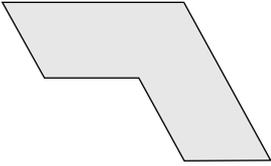


BOOMERANG

Size: 250 x 550 x 2,5 mm




HEXAGON

Size: 650 x 650 x 2,5 mm




TRIANGLE

Size: 650 x 650 x 2,5 mm




PUZZLE

Size: 650 x 442 x 2,5 mm



MUSHROOM

Size: 500 x 500 x 2,5 mm

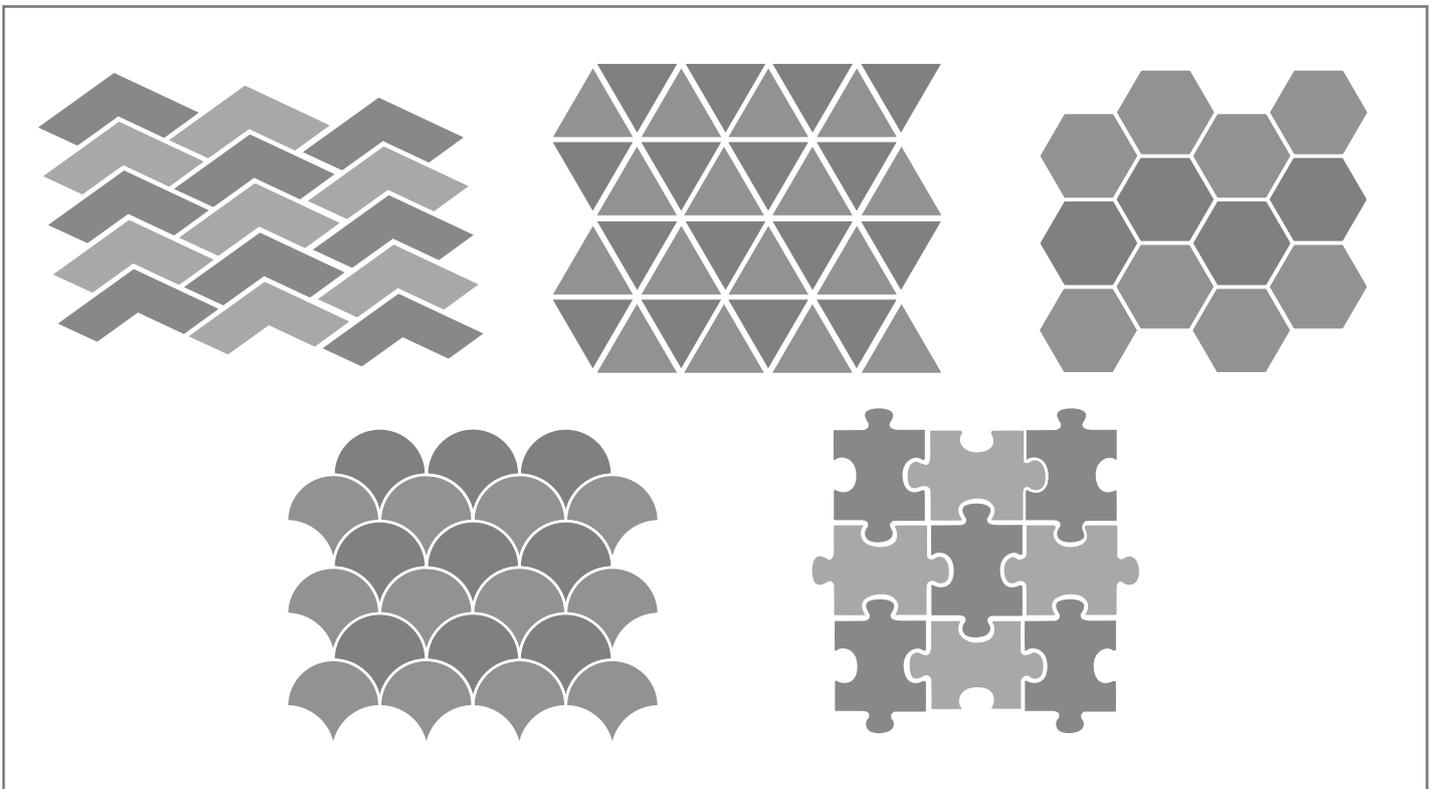


For delivery times and minimum quantity, please ask your sales contact



Original
WOVEN

DELIVERY
within
60-90 days

Dimensions/Solutions
Rolls 2 x 10 m / Loose Lay 500 x 500 mm / Walls 1 x 15 m

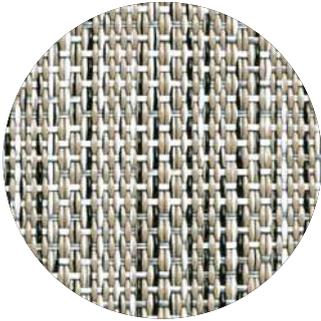


Linen 101




Linen 104



Linen 105

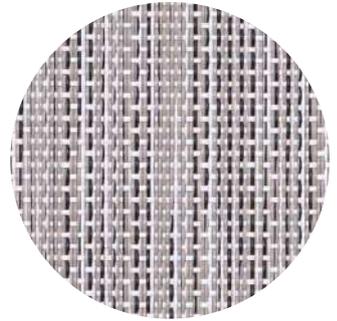


Linen 106

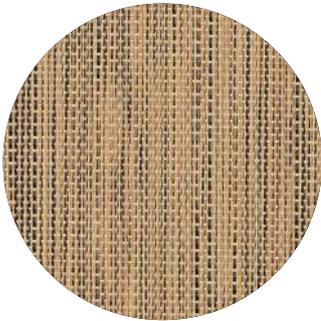


Linen 107




Linen 108

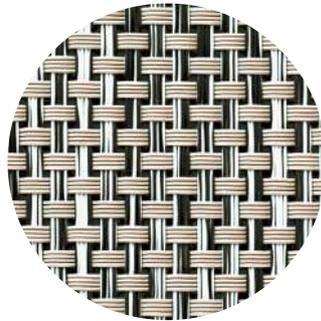


Rattan 301

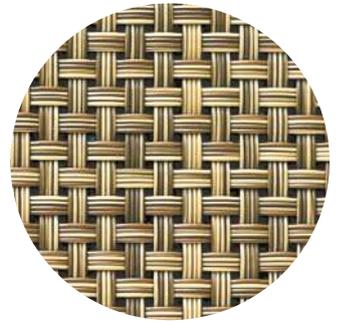


Rattan 302

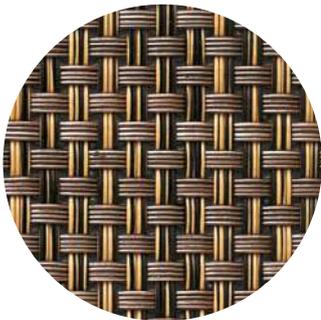

Rattan 303

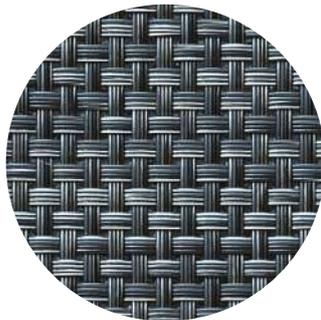

Rattan 304

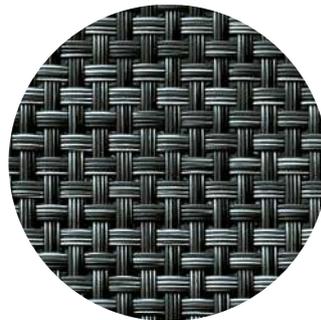


Rattan 305



Stripe 115



Stripe 116

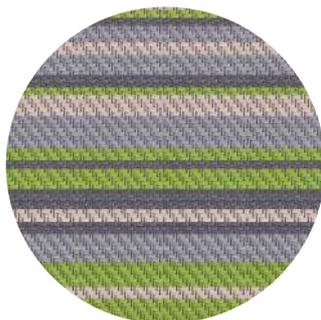

Stripe 117



Stripe 118




Stripe 119



Original
WOVEN

DELIVERY
within
60-90 days

Dimensions/Solutions
Loose Lay 500 x 500 mm / Walls 1 x 15 m

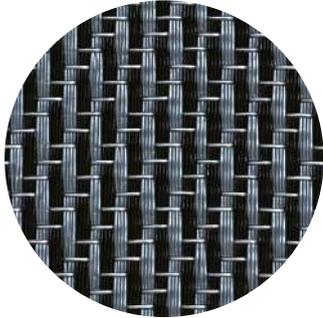


Sisal 701



Sisal 702




Sisal 703

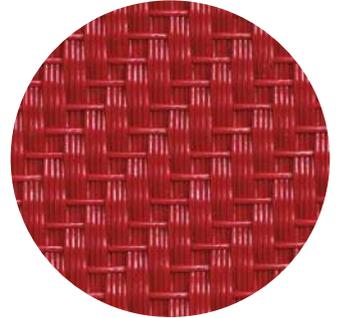

Sisal 704



Sisal 705

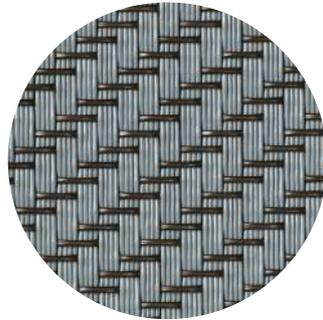


Sisal 706




Sisal 707




Sisal 708

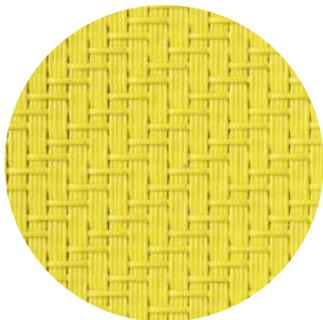


Sisal 709

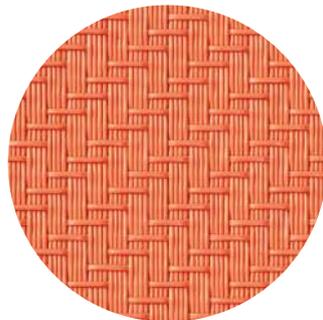


Sisal 710

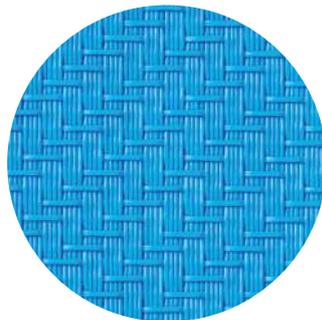

Sisal 711

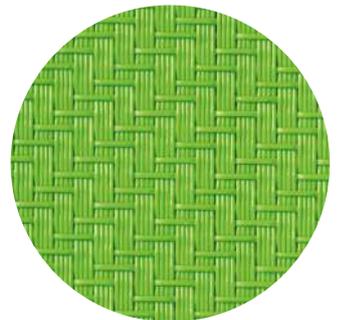

Sisal 712

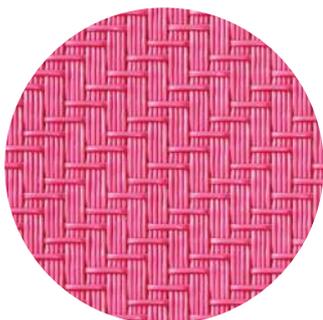

Sisal 713



Sisal 715




Original WOVEN

DELIVERY
within
60-90 days

Dimensions/Solutions
Rolls 2 x 10 m / Loose Lay 500 x 500 mm / Walls 1 x 15 m



Herringbone 601

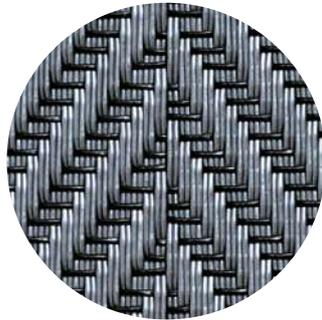

Herringbone 602



Herringbone 603




Herringbone 604




Herringbone 605




Quilt Q01

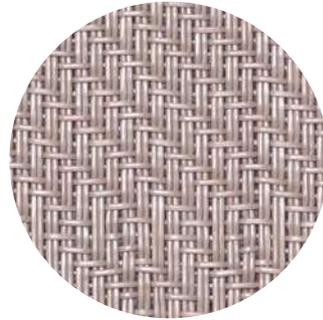

Quilt Q02

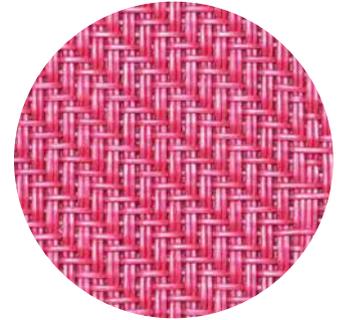

Quilt Q03

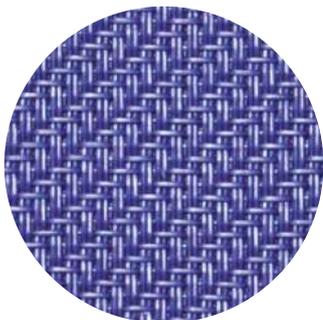


Quilt Q04



Quilt Q05



Infinity S11

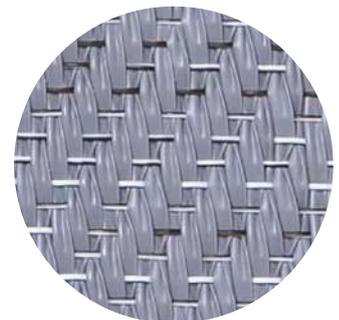


Infinity S12




Infinity S13



Infinity S14

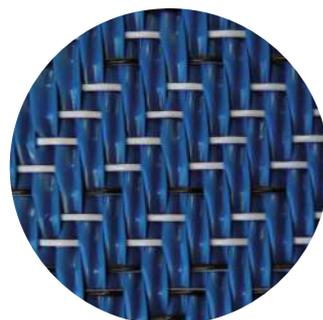

Infinity S15

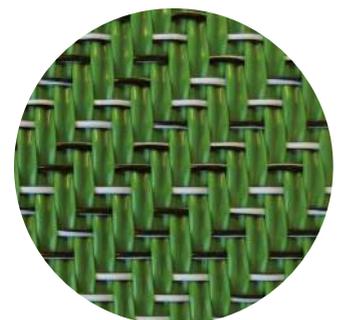

Infinity S16



Original WOVEN

DELIVERY
within
60-90 days

Dimensions/Solutions
Rolls 2 x 10 m / Loose Lay 500 x 500 mm / Walls 1 x 15 m




Peyton 801




Peyton 802




Peyton 803

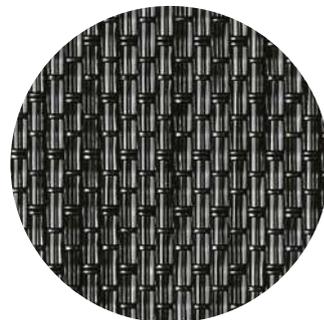

Peyton 804

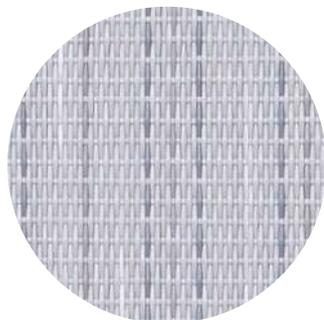


Streaky K01

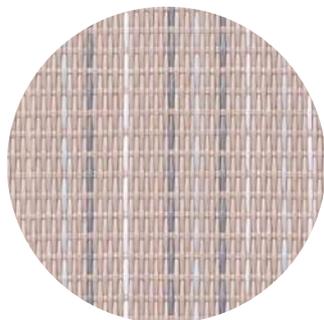

Streaky K02



Streaky K03

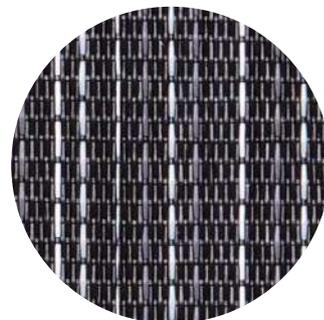

Streaky K04



Streaky K05



Streaky K06



Streaky K07



Peyton 802

Original WOVEN

DELIVERY
within
60-90 days


Dimensions/Solutions
Rolls 2 x 10 m / Loose Lay 500 x 500 mm / Walls 1 x 15 m



Granite T01



Granite T02

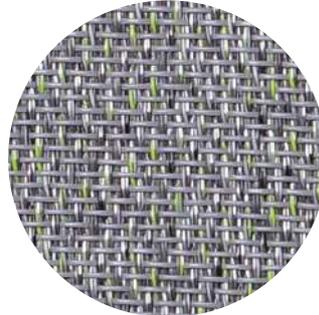

Granite T03




Granite T04




Granite T05




Granite T06

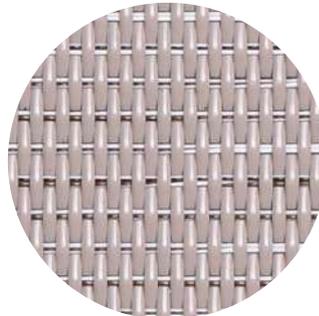


Ellipse E11

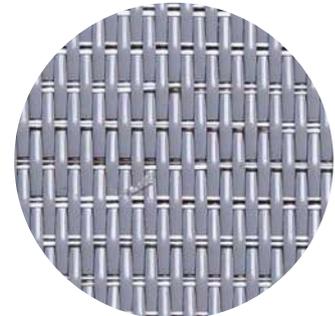


Ellipse E12

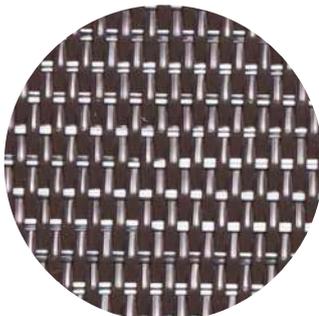


Ellipse E13

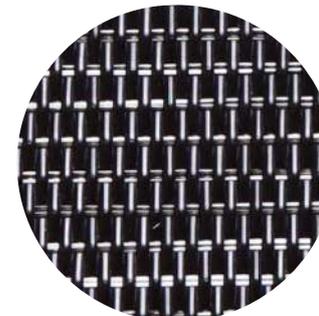


Ellipse E14

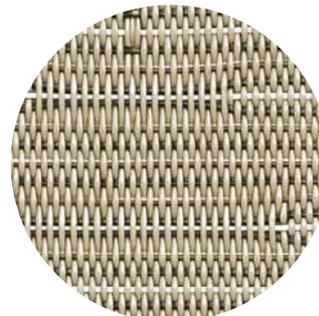


Bamboo 501

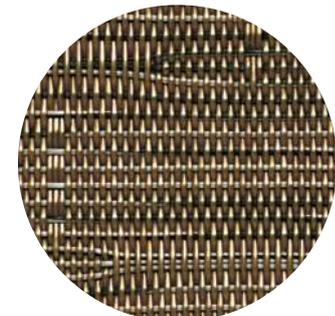

Bamboo 502

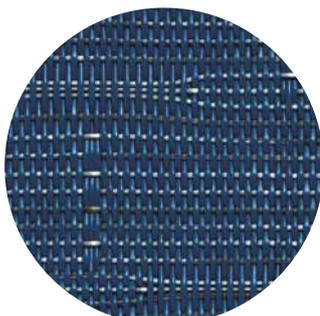

Bamboo 504

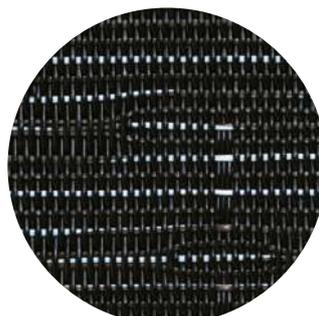

Bamboo 505




Original
WOVEN

DELIVERY
within
60-90 days


Dimensions/Solutions
Rolls 2 x 10 m / Loose Lay 500 x 500 mm / Walls 1 x 15 m




Twill 202

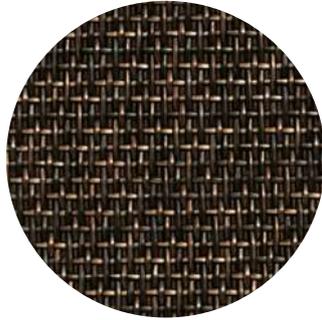


Twill 203

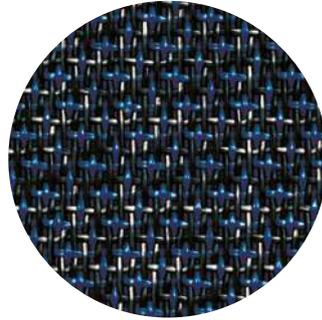


Twill 204

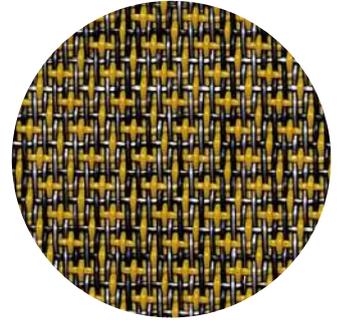


Twill 206

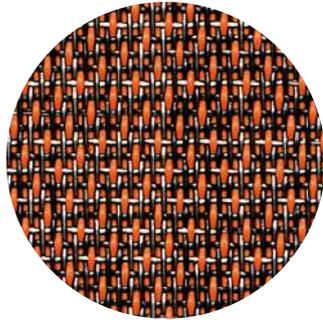


Twill 207

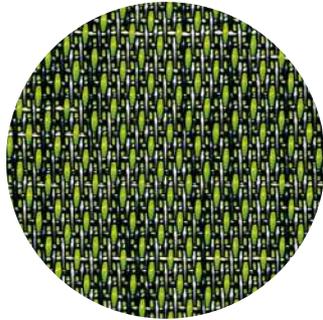

Twill 208

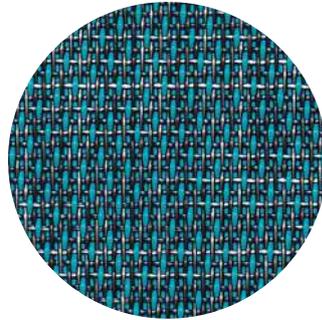

Twill 209

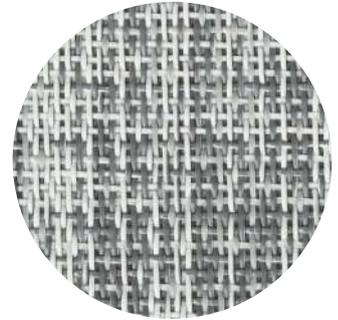

Twill 210




Twill 211




Twill 212



Twill 213

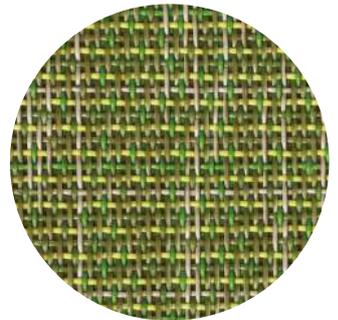

Twill 214

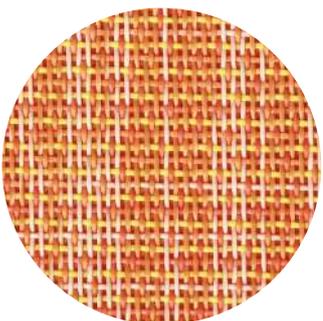


Twill 215




Original
WOVEN

DELIVERY
within
60-90 days

Dimensions/Solutions
Rolls 2 x 10 m / Loose Lay 500 x 500 mm / Walls 1 x 15 m

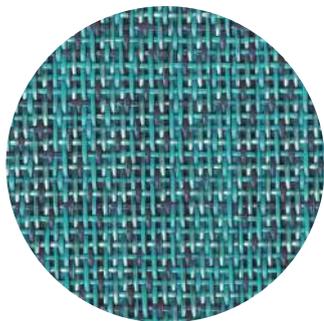

Twill 216

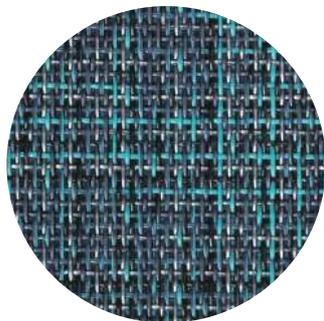


Twill 217



Twill 218



Twill 219

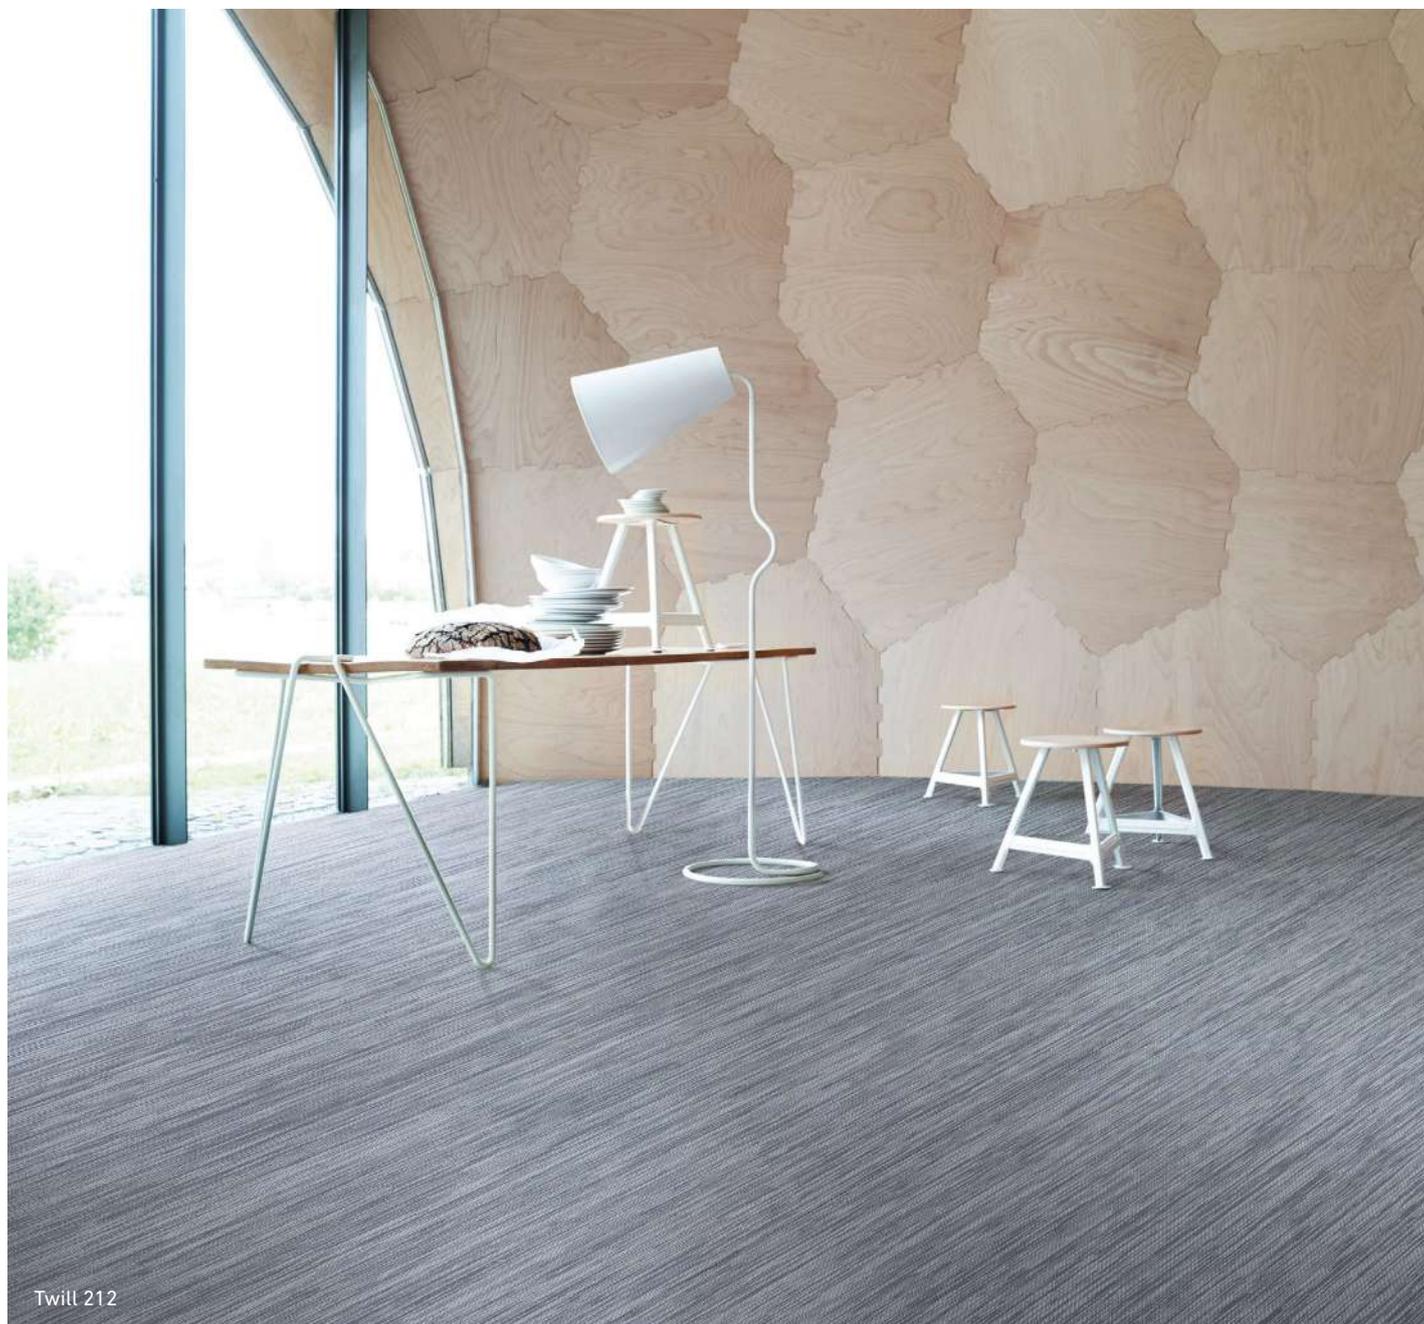


Twill 212

Original WOVEN

DELIVERY
within
60-90 days


Dimensions/Solutions
Rolls 2 x 10 m / Loose Lay 500 x 500mm / Acoustic Loose Lay
610 x 610 or 305 mm / Walls 1 x 15 m / Sheets 500 x 500 mm

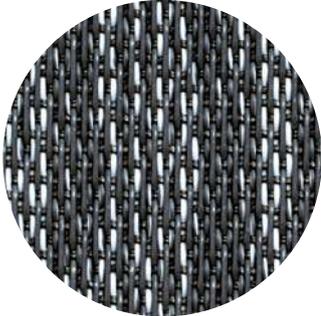

Twill 201



Twill 205

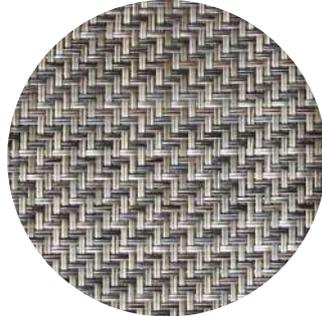


WV4006



WV4007



WV4008

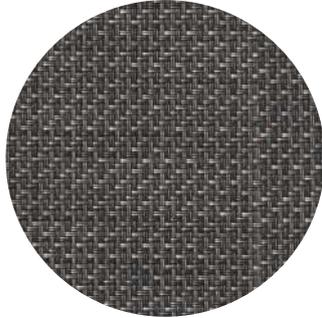

WV4010



WV1209-10



WV4007 + WV4008

Original
WOVEN

DELIVERY
within
60-90 days

Dimensions/Solutions

Acoustic Loose Lay 610 x 610 or 305 mm /

Sheets 500 x 500 mm




WV4001




WV4002




WV4003

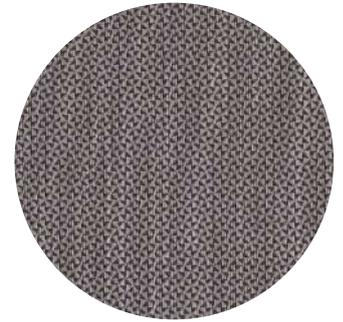

WV4004

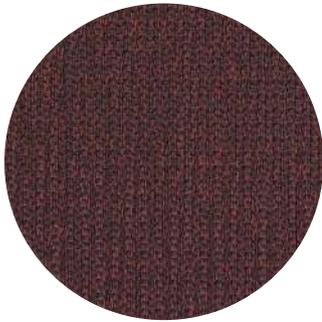


WV4005

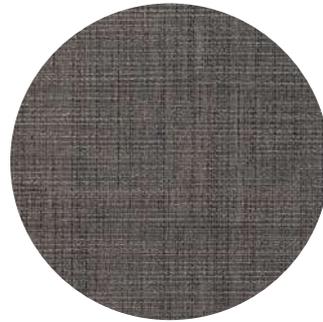


WV4009



WV4011

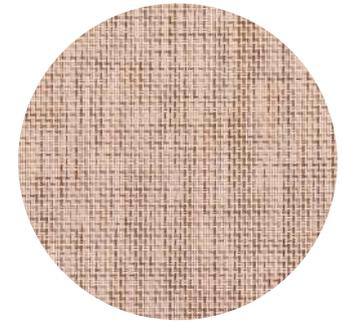


WV4012

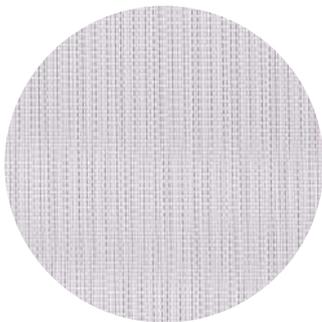

WV4017



WV4018

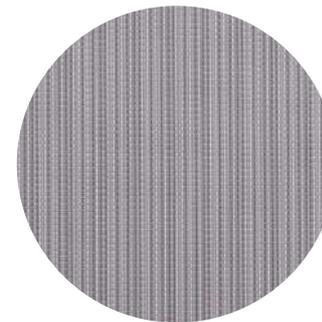

WV4019



WV1209-15



WOVEN JACQUARD

ROLLS - LOOSE LAY - ACOUSTIC LOOSE LAY -
WALLS - SPLASH₂O DESIGN



WOVEN

WOVEN JACQUARD SOLUTIONS

GLUING SYSTEM



ROLLS

- Woven vinyl for glue down
- 100% waterproof
- Roll format
- Leveler is required
- No dilatation gap/skirting required



WALLS

- Solution for walls
- 100% waterproof
- Roll format
- Easy to install with permanent glue
- Fire retardant

SELF-LAYING SYSTEM



LOOSE LAY


- Installation with removable or permanent glue
- Easy to install
- Antistatic
- Easy access to the subfloor
- Easy to replace



ACOUSTIC LOOSE LAY

- Installation with removable or permanent glue
- Easy to install and replace
- Antistatic
- Easy access to the subfloor
- Greater sound insulation

CLICK SYSTEM




SPLASH₂0 DESIGN

- 100% waterproof
- No subfloor preparation
- No glue needed
- Installation up to 150m² without dilatation joints
- Waterproof sound underlay included

The fiberglass composition of the woven makes it a material **free of mites and bacteria**, suitable to be installed in any space, complying with all hygiene requirements.


WOVEN JACQUARD FORMATS

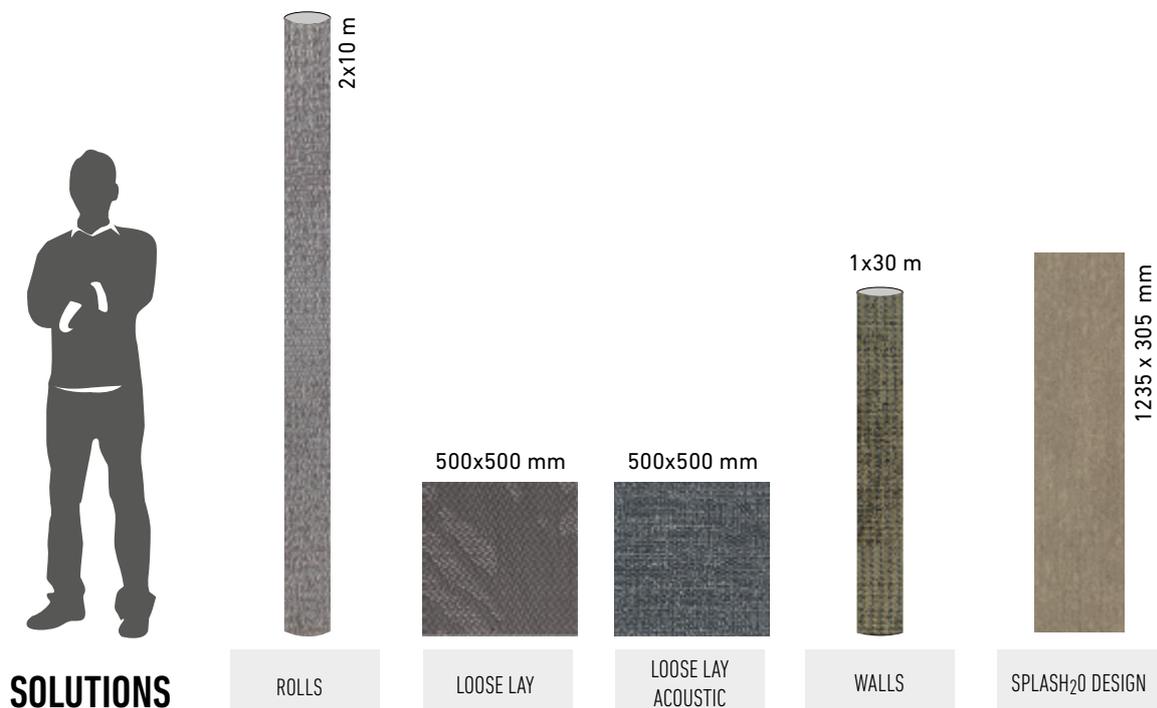

WOVEN ROLLS

JACQUARD COLLECTION

TECHNICAL DATA SHEET

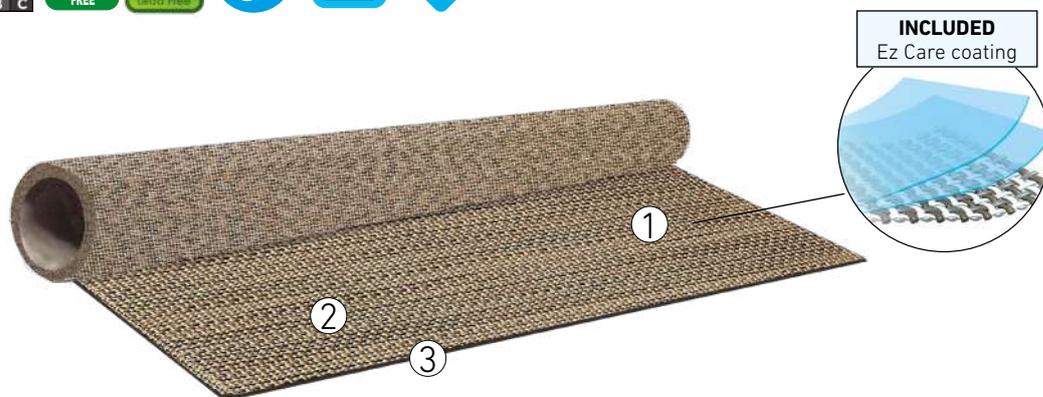

- ① EZ Care coatings
- ② Woven Vinyl:
 - 96% PVC,
 - 1,5% polyester
 - 2,5% Glassfiber
- ③ PVC Rigid with glassfiber reinforce

Characteristics	Test	Woven Rolls (Jacquard Range)
Classification	EN 685	23/33
Dimensions	EN 427	2 x 10 m
Thickness	EN 430	from 2,31 to 2,80 mm (depending on the pattern)
Weight	EN 430	from 2,95 to 3,37 kg/m ² (depending on the pattern)
Stains resistance	-	Sanitized protection (EZ Care)
Fire resistance	EN 13501-1	Class BFLs1 (B1)
Thermal resistance	EN 12664	0,0639 m ² K/W*
Thermal conductivity	En 12667 (2011)	0,0416 W/m.k
Formaldehyde emission	EN 717-1	E1
UV Resistance	ISO 105 - B02	> Grade 6
Fungus test	ASTM G21	No Growth after 28 days
Skew and Bow	EN 427	Max 2%
Slip/Slide resistance	EN 13893	<0,3
	DIN 51130	R10
Residual Indentation	EN 433:1994	0.08mm
Dimensional Stability	EN 434:1994	0.05% (X + Y direction)
Curling	EN 434:1994	1.5mm
Antistatic Performance	EN 1815	< 2 kV
Acoustics Performance	EN ISO 717-2	Lw=14dB Cl=-9dB
Castor chair suitability**	EN 985	Continuous use

* Suitable for underfloor heating system ** Suitable for soft polyamide wheels (type W)



NOTE: Being a textile product, this range has a tolerance of 2% asymmetry, known as skew and bow effect. Maximum fraying tolerance of 5 inner-yarns/ml guaranteed. It has all the textile properties and these may suffer variations or changes with time that may affect and alter the colour.



WOVEN LOOSE LAY

JACQUARD COLLECTION

TECHNICAL DATA SHEET




- ① EZ Care coatings
- ② Woven Vinyl:
 - 96% PVC,
 - 1,5% polyester
 - 2,5% Glassfiber
- ③ PVC Rigid with glassfiber reinforce

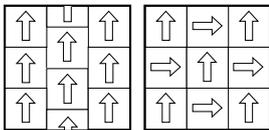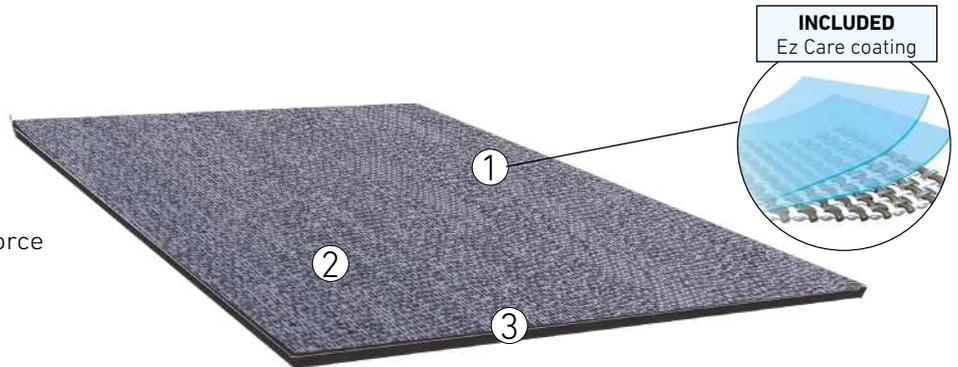

Installation:
Chessboard system
or lineal

Characteristics	Test	Woven Loose Lay (Jacquard Range except ref. WJ)
Classification	EN 685	23/33
Dimensions	EN 427	500 x 500 mm
Thickness	EN 430	from 3,85 to 4,40 mm (depending on the pattern)
Weight	EN 430	from 4,90 to 5,30 kg/m ² (depending on the pattern)
Stains resistance	-	Sanitized protection (EZ Care)
Fire resistance	EN 13501-1	Class BFLs1 (B1)
Thermal resistance	EN 12664	0,0639 m2 K/W*
Thermal conductivity	EN 12667 (2011)	0,0416 W/m.k
Formaldehyde emission	EN 717-1	E1
UV Resistance	ISO 105 - B02	> Grade 6
Fungus test	ASTM G21	No Growth after 28 days
Skew and Bow	EN 427	Max 2%
Slip/Slide resistance	EN 13893	<0,3
	DIN 51130	R10
Residual Indentation	EN 433:1994	0.08mm
Dimensional Stability	EN 434:1994	0.05% (X + Y direction)
Curling	EN 434:1994	1.5mm
Antistatic Performance	EN 1815	< 2 kV
Acoustics Performance	EN ISO 717-2	Lw=14dB Cl=-9dB
Castor chair suitability**	EN 985	Continuous use

* Suitable for underfloor heating system ** Suitable for soft polyamide wheels (type W)

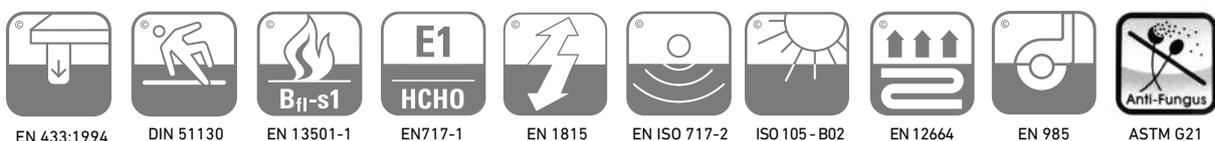


NOTE: Being a textile product, this range has a tolerance of 2% asymmetry, known as skew and bow effect. Maximum fraying tolerance of 5 inner-yarns/ml guaranteed. It has all the textile properties and these may suffer variations or changes with time that may affect and alter the colour.

WOVEN ACOUSTIC LOOSE LAY


TECHNICAL DATA SHEET

JACQUARD COLLECTION

References: WJ0001-0029



- ① Woven Vinyl
- ② PVC + FiberGlass + PVC
- ③ Felt base

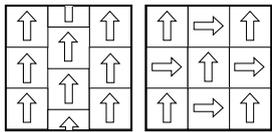


Installation:
Chessboard system
or lineal



Acoustic base with felt

Delivery time
5-6 weeks

Characteristics	Test	Woven Acoustic Loose Lay (Jacquard Range WJ0001-0029)
Classification	EN 1307	23/33
Dimensions	EN 427	500 x 500 mm
Thickness	EN 430	4,7 mm
Weight	EN 430	3 kg/m ²
Fire resistance	EN 13501-1	Class BFLs1 (B1)
Light Fastness	ISO 105-B02	≥ 7
Slip resistance	EN 13893	≥ 0,3
Lisson	EN 1963	< 30g/m ²
Resistance to Fraying	EN 1814	Fulfils the requirements
Antistatic	ISO 6356	< 2 kV
Reduction of impact Noise	EN ISO 717-2	19dB
Castor chair suitability	EN 985	Intensive use
Sound Absorption	ISO 354	Class E
Walking noise on floors	EN 16205	71 dB (A)

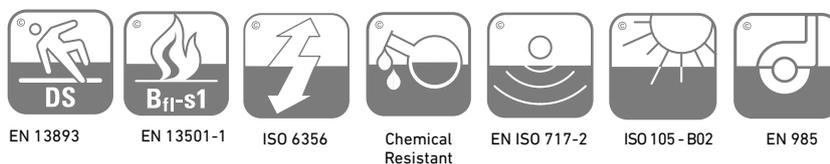

NOTE: Being a textile product, this range has a tolerance of 2% asymmetry, known as skew and bow effect. Maximum fraying tolerance of 5 inner-yarns/ml guaranteed. It has all the textile properties and these may suffer variations or changes with time that may affect and alter the colour.

WOVEN WALLS


JACQUARD COLLECTION

TECHNICAL DATA SHEET




ONLY FOR WALLS

- ① EZ Care coatings
- ② Woven Vinyl:
 - 90% PVC,
 - 6,2% polyester
 - 3,8% Glassfiber
- ③ Non Woven
 - 100% polyester backing

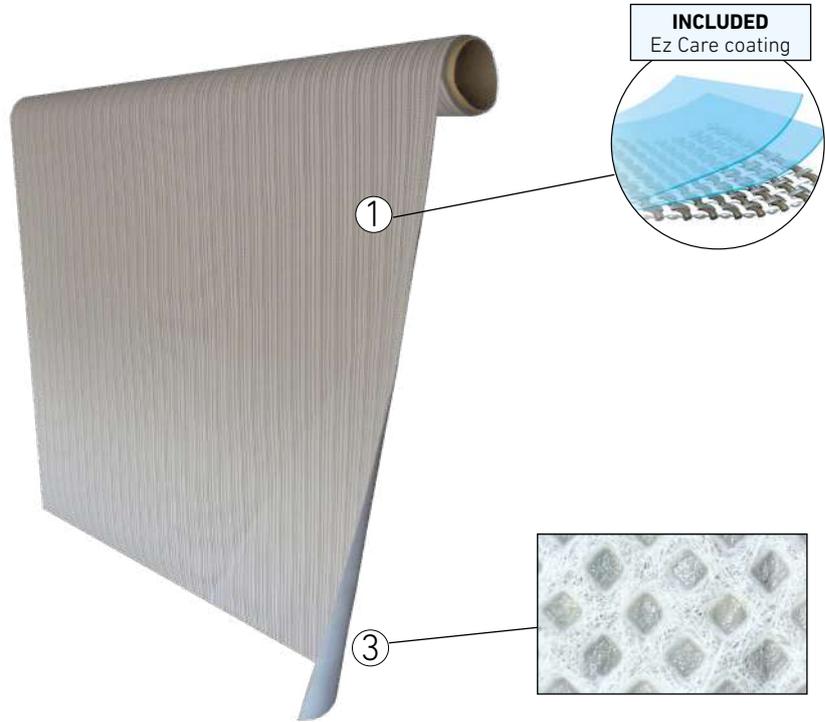

Characteristics	Test	Woven Walls (Jacquard Range)
Roll width	-	1 m
Roll Length	-	15 m
Thickness	-	From 1,5 to 1,8 mm (depending on the pattern)
Weight	-	From 780 to 1041 g/m ² (depending on the pattern)
Stains resistance	-	Sanitized protection (EZ Care)
Fire resistance	EN 13501	B-S1 d0
UV resistance	ISO 105-B02	Grade 6
Fungus test	ASTM G21	No Growth after 28 days
Skew and Bow	EN 427	Max 2%
Curling	EN 434:1994	1,5 mm
Release of Formaldehyde	-	Pass (120mg/kg)
Release of Vinyl Chloride	-	Monomer -Pass (<0.2mg/kg)
Sound Absorption		$\alpha_w=0.05$
Release of dangerous substances (SVHC)	xXMCCM161101593	Pass

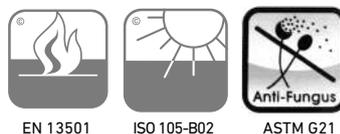


NOTE: Being a textile product, this range has a tolerance of 2% asymmetry, known as skew and bow effect. Maximum fraying tolerance of 5 inner-yarns/ml guaranteed. It has all the textile properties and these may suffer variations or changes with time that may affect and alter the colour.


WOVEN SPLASH₂O DESIGN

JACQUARD COLLECTION

 TECHNICAL DATA SHEET



Ref: WJ0005/10/13/23/28/29

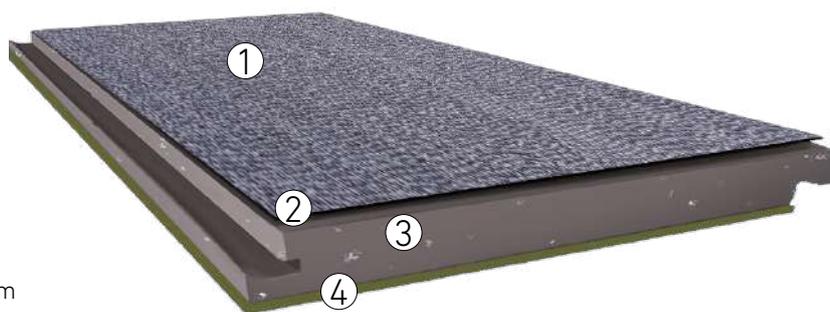

Other references on inquiry

- ① Woven vinyl 0,6 mm
- ② Elastic vinyl foil 0,4 mm
- ③ Waterproof hydro core board 3,8 mm
- ④ Waterproof sound underlay 1,4 mm



Produced under license of Unilin - EP nr. 0843763/03.5, patent nr. 6.006.486
Installation up to 150m² without expansion joints. Maximum 15m length / 10m width.


Characteristics	Test	Woven SplashH2O Design
Classification	EN 16511	23/33
Dimensions	EN 427/428	1235 x 305 mm
Thickness	EN 430	6,2 mm
Weight	EN 430	ca. 6.200 g/m ²
Impact Sound Reduction	EN 10140	19 dB
Fire Resistance	EN ISO 9239-1	Class BFLs1 (B1)
Effect of castor chair	EN 985	Suitable for type H
Dimensional Stability	EN 434	< 0,10 %
Thermal Resistance	EN 12524	0,06 m ² K/W
Residual Indentation	EN 433	max. 0,03 mm
Reaction to static electricity	EN 1815	< 2kV
Lightfast	ISO 105	7
Coefficient of friction	EN 51130	R9
Resistance to chemicals	EN 438	Grade 5 (Groups 1,2,3)
Emissions Value		in conformity with AgBB
Water Resistant test	EN 317	0% Swelling
Locking Strength	ISO 24334	> 500 kg/m
Slip resistance	EN 13501-1	> 0,3
Walking sound reduction	EN 16205	RWS = 41,9 sone



NOTE: Being a textile product, this range has a tolerance of 2% asymmetry, known as skew and bow effect. Maximum fraying tolerance of 5 inner-yarns/ml guaranteed. It has all the textile properties and these may suffer variations or changes with time that may affect and alter the colour.

Jacquard WOVEN


Dimensions/Solutions
Rolls 2 x 10 m / Loose Lay 500 x 500mm / Walls 1 x 15 m

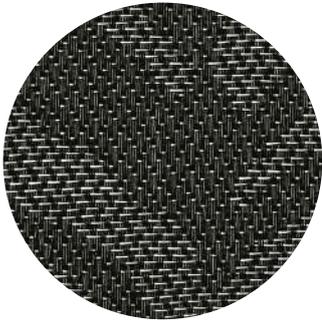

Chevron Remix CA4



Chevron Remix CA5

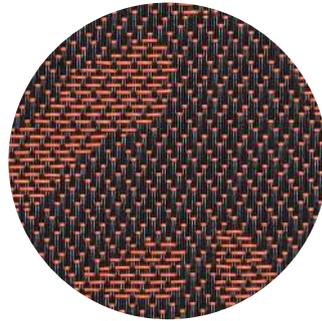


Chevron Remix CA6




Chevron Remix CA7




Chevron Remix CA9

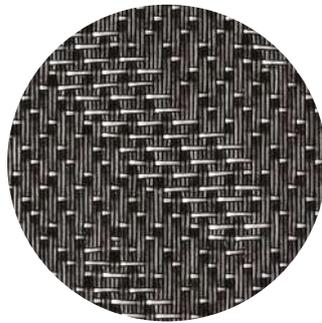

Chevron Remix CB4

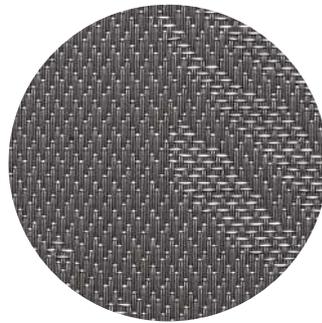

Chevron Remix CC4

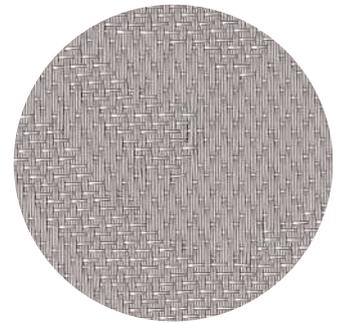


Chevron Remix CD4




Chevron Remix CA9

Jacquard WOVEN


Dimensions/Solutions
Rolls 2 x 10 m / Loose Lay 500 x 500mm / Walls 1 x 15 m

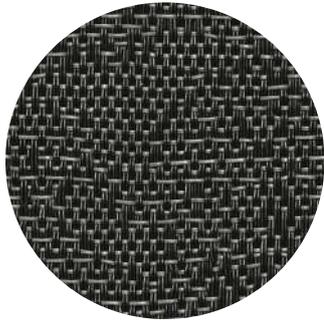


Frost FA2

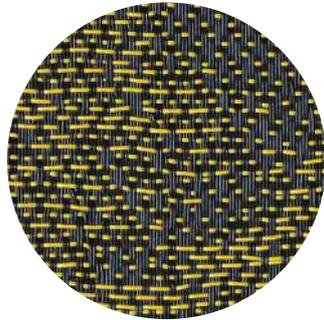


Frost FA5

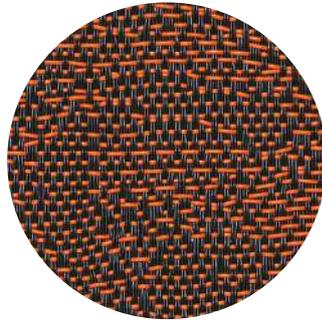


Frost FA6

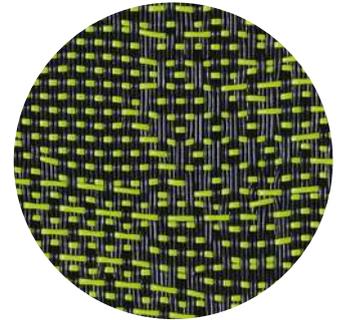


Frost FA7

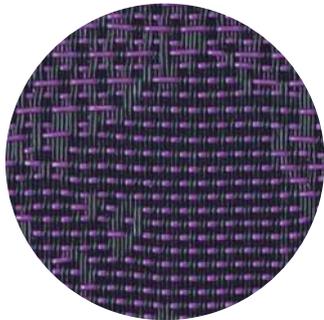

Frost FA8

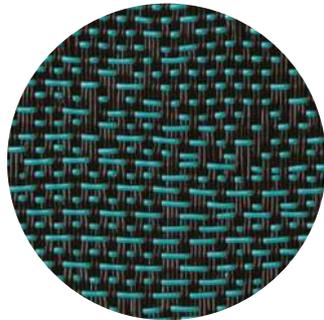

Frost FA9

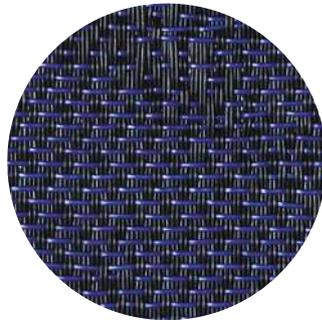


Frost FA10



Frost FD2




Adobecraft AD1

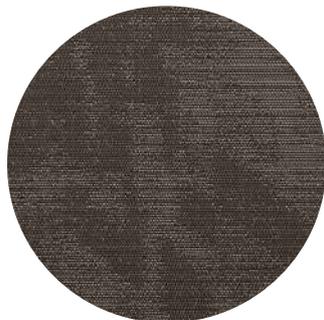


Adobecraft AD2



Sandscript SA1

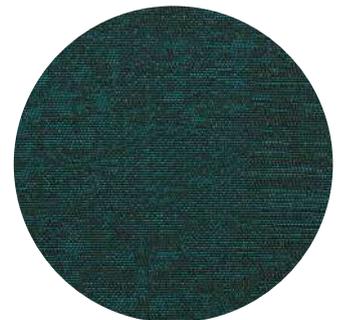


Sandscript SA2

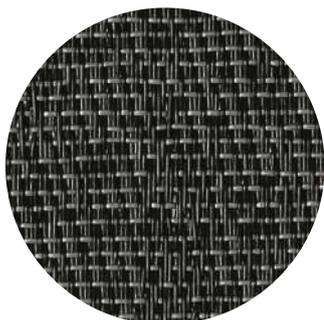

Glimmer GA2



Glimmer GA4

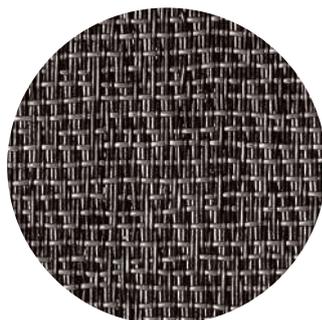

Glimmer GB2



Glimmer GB4




Jacquard
WOVEN

Dimensions/Solutions
Rolls 2 x 10 m / Loose Lay 500 x 500mm / Walls 1 x 15 m



Glimmer GC1

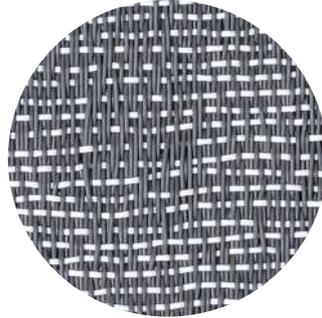


Glimmer GC3




Glimmer GD4




Artisanstone AR1

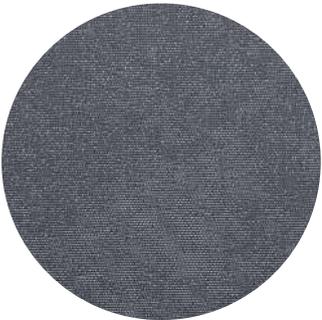

Artisanstone AR2

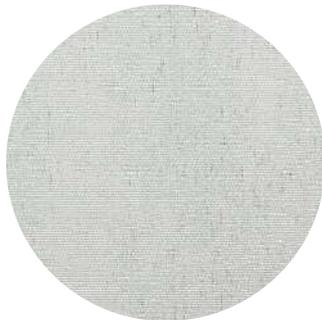

Watercourse WA1

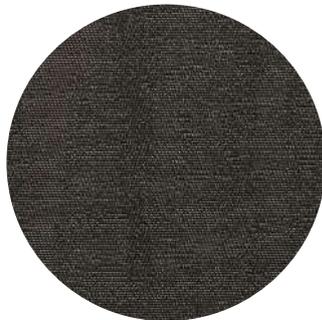

Watercourse WA2



Watercourse WA1

Jacquard WOVEN

Dimensions/Solutions
Rolls 2 x 10 m / Loose Lay 500 x 500mm / Walls 1 x 15 m



Marbleridge MA1



Marbleridge MA2




Marbleridge MA3



Marbleridge MA4



Marbleridge MA5

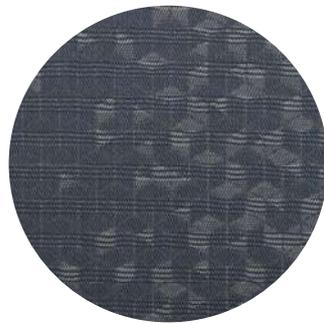

Moonscape M01



Moonscape M02



Shadowcrete SH1



Moonscape M01

Jacquard WOVEN


Dimensions/Solutions
Rolls 2 x 10 m / Loose Lay 500 x 500mm / Walls 1 x 15 m



Shadowcrete SH2




Shadowcrete SH3

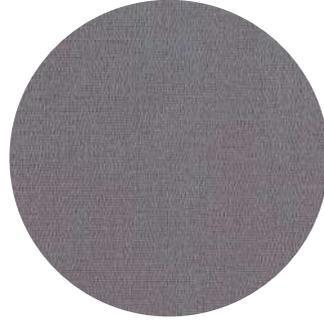


Shadowcrete SH4



Shadowcrete SH5

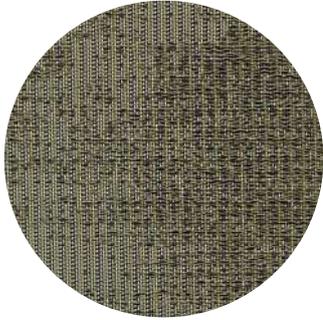

Shadowcrete SH6

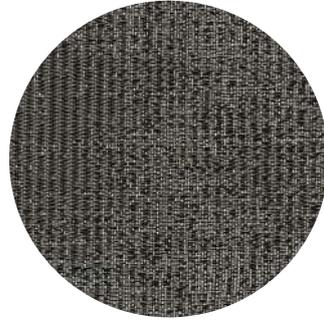

Shadowcrete SH7



Mysticshade MY1



Mysticshade MY2




Jacquard
WOVEN

Dimensions/Solutions
Acoustic Loose Lay 610 x 610 or 305 mm



WJ0001

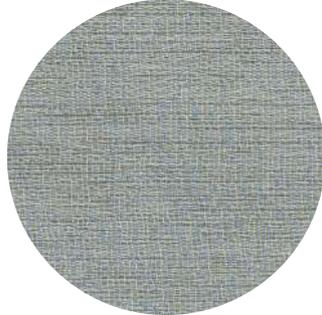

WJ0002



WJ0003




WJ0004



WJ0006



WJ0007

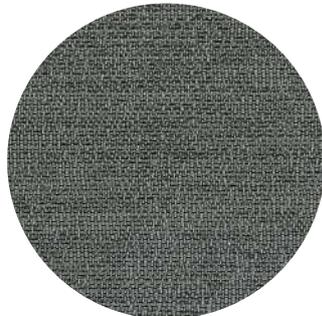

WJ0008



WJ0009



WJ0010



WJ0011



WJ0012



WJ0014



WJ0015



WJ0016



WJ0017



WJ0018



Jacquard WOVEN


Dimensions/Solutions

Acoustic Loose Lay 610 x 610 or 305 mm /

SplashH2O Design 1235 x 305 mm



WJ0019

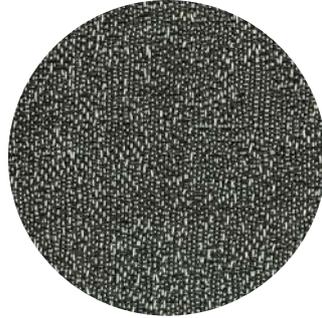

WJ0020



WJ0021



WJ0022



WJ0024




WJ0025




WJ0026



WJ0027

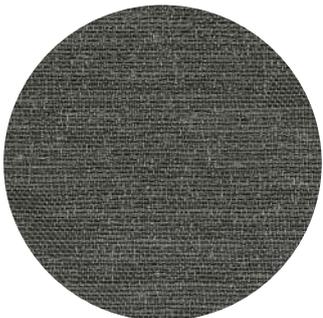

WJ0005

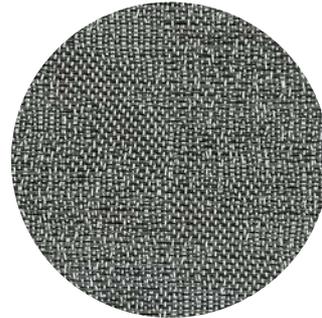

WJ0013



WJ0023



WJ0028



WJ0029



WOVEN ACCESSORIES


SKIRTING

CLICK SKIRTING

Available in every Floover decor. Same length as flooring range selected.

70 x 11 x 915 / 913 mm

45 x 11 x 915 / 913 mm

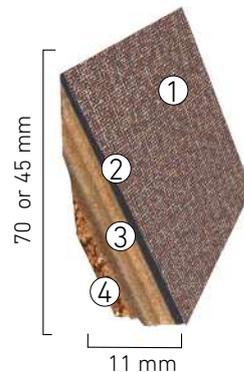


- ① Woven Vinyl
- ② Vinyl
- ③ HDF
- ④ Cork



NEW CLICK SKIRTING

Available in very Floover decor. Same length as flooring range selected.

56 x 15 x 915 mm / 1230 mm / 1815 mm

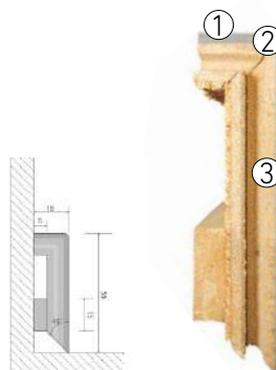

- ① Woven vinyl
- ② Vinyl
- ③ HDF



STAIRNOSE AND TRANSITION

TRANSITION OVERLAP

Available in every Floover reference. Same level as the flooring.

Same length and thickness as flooring pieces.


Production minimum is 6 pieces or multiple.



DILATATION JOINT

Same design and textures as flooring. Same length as floor planks.

Production minimum is 6 pieces or multiple

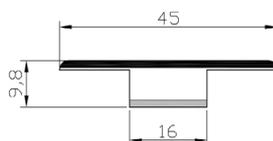


EZ CARE

NEW

A REVOLUCIONARY COATING THAT MAKES CLEANING A BREEZE

Floover, together with PPG, a company with 100 years flooring technology and experience, has developed EZ CARE, the most durable and comprehensive coating for textured woven vinyl flooring. EZ Care makes woven vinyl flooring easier to clean and maintain.

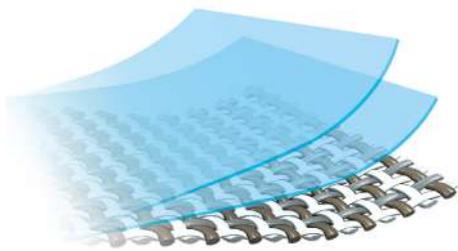

- 2P Secondary EZ CARE coating
- 1P Primary EZ CARE coating



Swiss antimicrobial technology available for all Woven products. Certify by Sanitized.



RUGS

WOVEN VINYL TEXTILE






WOVEN CUSTOM RUGS

SUITABLE
FOR
OUTDOOR

ORIGINAL COLLECTION


Custom rugs can be manufactured in any size, with or without border. It is possible to make them in different formats and shapes. Choose and combine between 10 Original Collection and 8 Jacquard Collection colors.

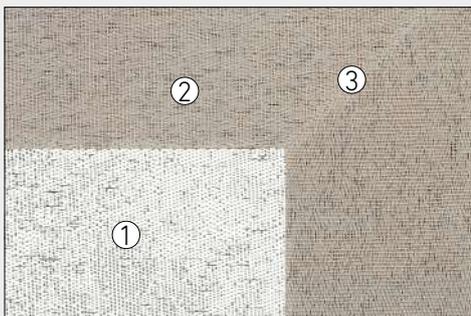


- ① Woven Vinyl: the standard measurement of the center is 2 meters and the maximum length is 10 meters. When the center of the rug is wider or longer, it will be welded and will have a joint.
- ② Border: we have two standard borders of 10cm or 20cm, although we can also make a double border or design it in any other measure.
- ③ Woven reinforced border: all the joints and the corners of the border are welded to the center of the rug for maximum strength.



WV4012

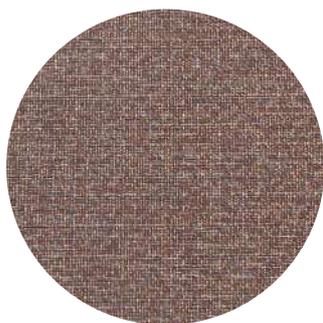

WV4007

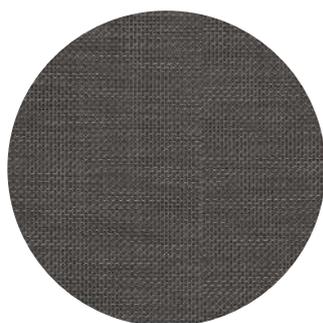

WV4010



WV4017



WV4018



WV4019



WV5201



WV5203



WV5205




WV5202

WOVEN CUSTOM RUGS

JACQUARD COLLECTION

SUITABLE
FOR
OUTDOOR

Custom rugs can be manufactured in any size, with or without border. It is possible to make them in different formats and shapes. Choose and combine between 10 Original Collection and 8 Jacquard Collection colors.

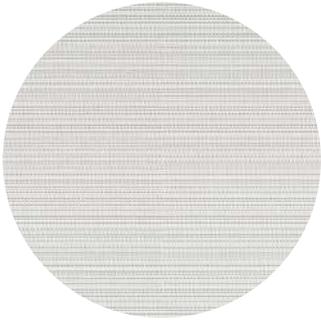

WJ4017




WJ4018




WJSH3



WJSH4

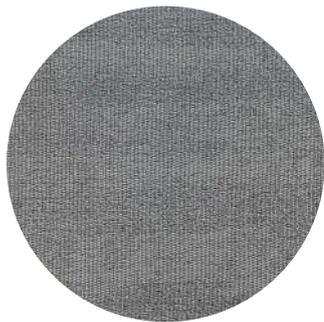

WJWA1

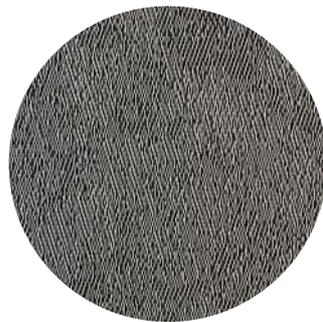

WJ4019



WJGB4



WJWA2



Center 502 - Border 500



Center WJ4017 - Double border WJ4018/WJ1017


WOVEN ECONOMIC RUGS

ORIGINAL & JACQUARD COLLECTION

Top



Back

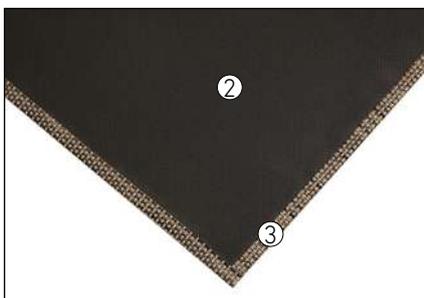

- ① Woven Vinyl 96% PVC, 1.5% Polyester, 2.5% Glassfiber
- ② Backing: 100% Rigid PVC
- ③ Woven reinforced border



UV resistant



Stains resistant



Water resistant



Abrasion resistant




Easy maintenance



Outdoor suitable

It is possible to make combinations with the 95 Original Collection and the 76 Jacquard Collection colors.

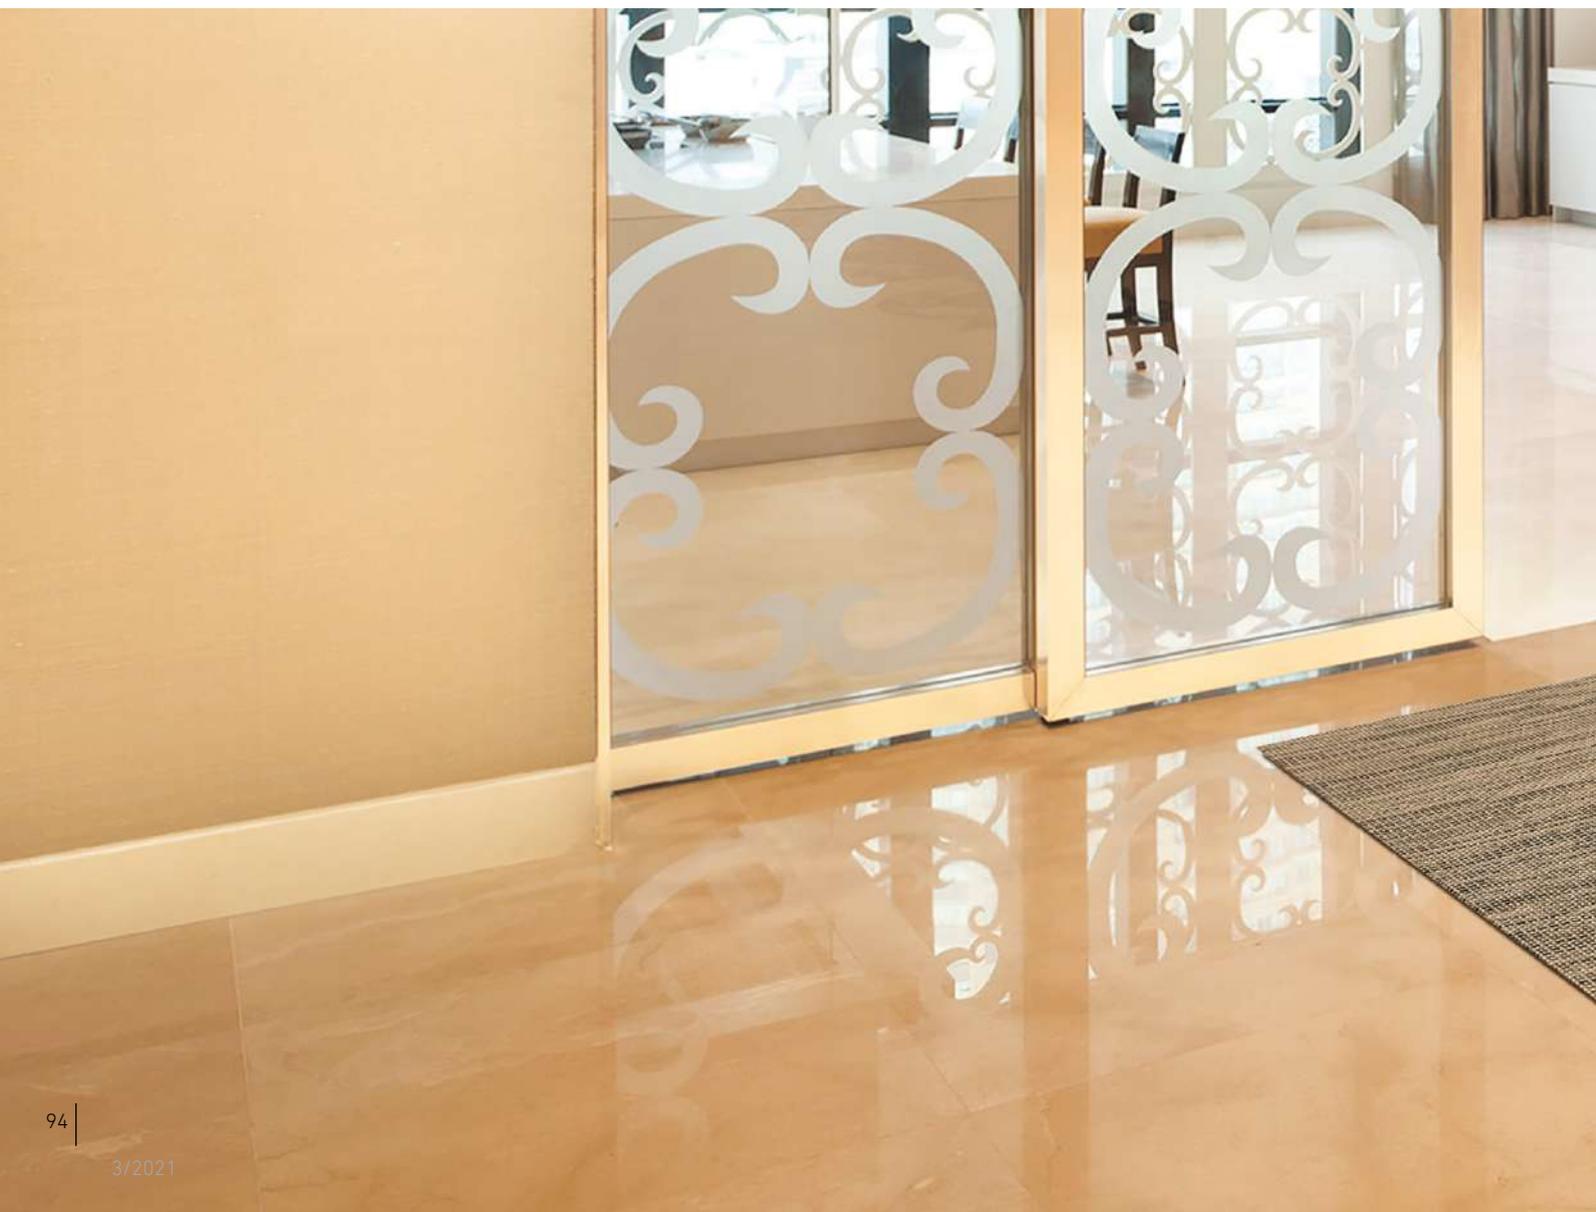

WOVEN ECONOMIC RUGS

ORIGINAL & JACQUARD COLLECTION

SUITABLE
FOR
OUTDOOR

SIZES:

630x1200 mm

630x1800 mm

1300x1800 mm

1570x1970 mm


1970x2970 mm




200*




200*

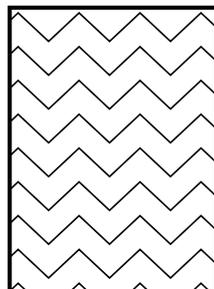

100*

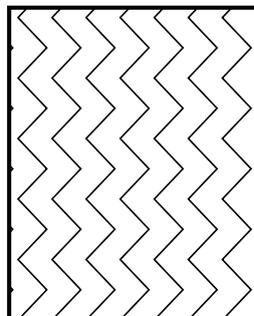

100*

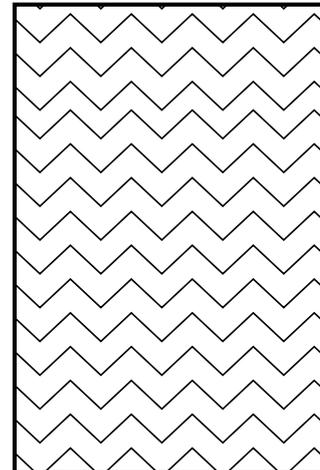

100*


* Minimum order




WOVEN RUGS WITH BORDER

ORIGINAL & JACQUARD COLLECTION

Top

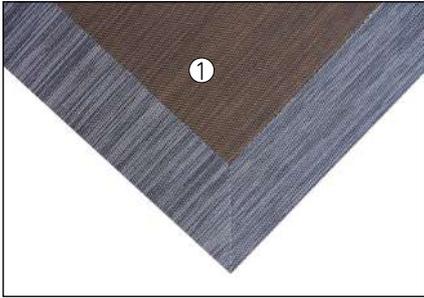

Back

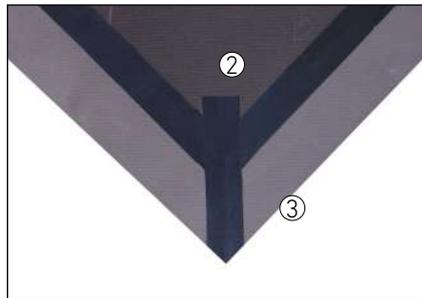

- ① Woven Vinyl 96% PVC, 1.5% Polyester, 2.5% Glassfiber
- ② Backing: 100% Rigid PVC
- ③ Reinforced cement tape



UV resistant



Stains resistant



Water resistant



Abrasion resistant



Easy maintenance



Outdoor suitable

It is possible to make combinations with the 95 Original Collection and the 76 Jacquard Collection colors.



WOVEN RUGS WITH BORDER

SUITABLE
FOR
OUTDOOR

ORIGINAL & JACQUARD COLLECTION

SIZES:


600x1200 mm

600x1800 mm


1300x1800 mm

1600x2000 mm


2000x3000 mm




200*

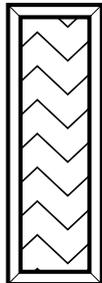


200*

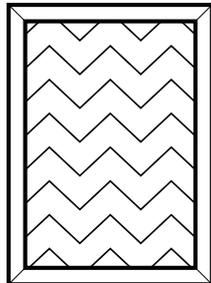

100*

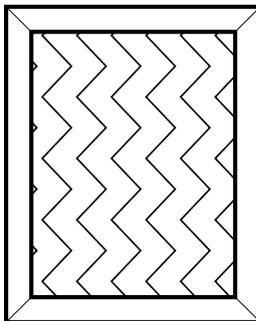

100*

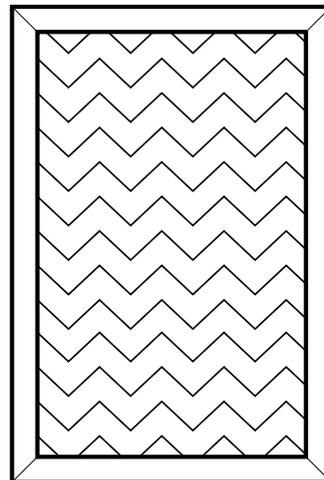

100*

* Minimum order



WOVEN CONFORT RUGS

ORIGINAL & JACQUARD COLLECTION

Top



Back



UV resistant



Stains resistant



Water resistant



Abrasion resistant



Easy maintenance

① Woven Vinyl 96% PVC, 1.5% Polyester, 2.5% Glassfiber

② Backing: 100% Foam PVC (6 mm)

③ BORDER COLOR



Black

Brown

Coffee

Blue

Green

It is possible to make combinations with the 95 Original Collection and the 76 Jacquard Collection colors.




WOVEN CONFORT RUGS

ONLY
FOR
INDOOR

ORIGINAL & JACQUARD COLLECTION

SIZE: 500x700 mm

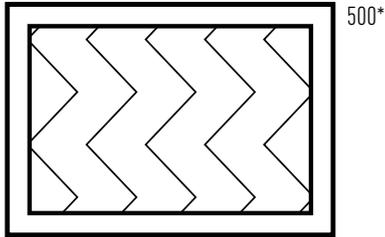


Border: 50mm

Total weight: 1020g/ud

Total thickness: 6mm

SIZE: 750x1050 mm

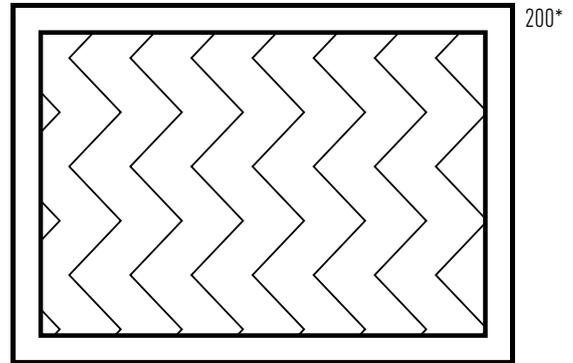

Border: 70mm

Total weight: 2400g/ud

Total thickness: 6mm

* Minimum order



ECOLOGIC

ENVIRONMENT-FRIENDLY







PURE

GLUE DOWN -HDF - SPLASH₂O PET

Floover Pure is Free of PVC, chlorine, plasticisers and phthalates, instead we use PET, which can be recycled easily. Further developments of the surface technology provides a special surface structure and a highly durable PU coating with an authentic haptic. Pure is easy to care, extremely resistant to stains and very scratch resistant.

ECOLOGIC

PURE SOLUTIONS

GLUING SYSTEM




GLUE DOWN

- Traditional Dry Back LVT for Glue Down
- 100% waterproof
- Leveller is required
- No dilatation gap/skirting required
- Hardwearing PU protection

CLICK SYSTEM



Produced under license of Unilin - EP nr. 0843763/U.5. grom nr. 6.005.485



HDF

- Hardwearing PU protection
- Moisture retardant fibre-board
- Sound impact underlay



SPLASH₂O PET

- 100% Waterproof
- No subfloor preparation
- Waterproof sound underlay PVC-free
- Hardwearing PU protection

PURE FORMATS



DECORS



WOOD



STONE

GLUE DOWN

PURE - PVC FREE

TECHNICAL DATA SHEET



- ① Hardwearing PU protection
- ② Special PVC-free layer



Characteristics	Test	Glue Down Pure
Classification	EN 16511	23 / 34
Dimensions	EN 427/428	1235 x 230/ 305 mm - 620 x 450 mm
Thickness	EN 430	1,5 mm
Weight	EN 430	2.700 g/m ²
Impact Sound Reduction	EN ISO 717-2	3 dB
Fire Resistance	DIN 4102	Class BFLs1
Effect of castor chair	EN 425	Suitable for type W
Dimensional Stability	EN 434	< 0,05 %
Thermal Resistance	EN 12524	0,019 m ² K/W
Residual Indentation	EN 433	avg. 0,01 mm
Reaction to static electricity	EN 1815	< 2kV
Lightfast	ISO 105	> 6
Coefficient of friction	EN 51130	R10
Resistance to chemicals	EN 423	Good resistance
Emissions Value		In conformity with AgBB
Swellness value 24h	EN 317	0 %
Effect of a furniture leg	EN 424	No visible damage




HDF

PURE - PVC FREE

TECHNICAL DATA SHEET



- ① Hardwearing PU protection
- ② Special PVC-free layer
- ③ Moisture retardant fibre-board
- ④ Green sound - sound impact

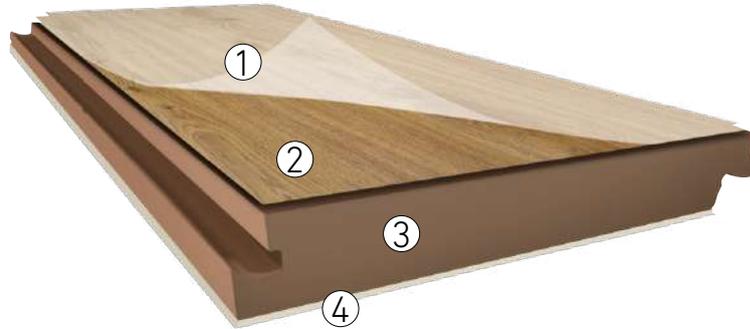

Produced under license of Unilin - EP nr. 0843763/0/5, patent nr. 6.006.486

Characteristics	Test	HDF Pure
Classification	EN 16511	23 / 34
Dimensions	EN 427/428	1235 x 230/ 305 mm - 620 x 450 mm
Thickness	EN 430	8,7 mm
Weight	EN 430	8.900 g/m ²
Impact Sound Reduction	EN ISO 717-2	14 dB
Fire Resistance	DIN 4102	Class CFLs1
Effect of castor chair	EN 425	Suitable for type W
Dimensional Stability	EN 434	< 0,05 %
Thermal Resistance	EN 12524	0,090 m ² K/W
Residual Indentation	EN 433	avg. 0,01 mm
Reaction to static electricity	EN 1815	< 2kV
Lightfast	ISO 105	> 6
Coefficient of friction	EN 51130	R10
Resistance to chemicals	EN 423	Good resistance
Emissions Value		In conformity with AgBB
Swellness value 24h	EN 317	< 8%
Locking Strength	ISO 24334	> 500 kg/m
Effect of a furniture leg	EN 424	No visible damage




SPLASH₂O PET

PURE - PVC FREE

TECHNICAL DATA SHEET



- ① Hardwearing PU protection
- ② Special PVC-free layer
- ③ Waterproof rigid core PVC-free
- ④ Waterproof sound underlay PVC-free

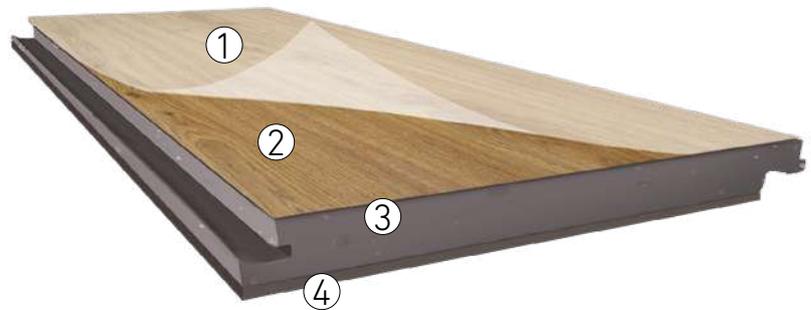

Produced under license of Unilin - EP nr. 0843763/11.5. paron nr. 6.006.486

Characteristics	Test	Splash20 Pet
Classification	EN 16511	23 / 34
Dimensions	EN 427/428	1235 x 230/ 305 mm - 620 x 450 mm
Thickness	EN 430	6,3 mm
Weight	EN 430	6.400 g/m ²
Impact Sound Reduction	EN ISO 717-2	20 dB
Fire Resistance	DIN 4102	Class BFLs1
Effect of castro chair	EN 425	Suitable for type W
Dimensional Stability	EN 434	< 0,05 %
Thermal Resistance	EN 12524	0,050 m ² K/W
Residual Indentation	EN 433	avg. 0,01 mm
Reaction to static electricity	EN 1815	< 2kV
Lightfast	ISO 105	> 6
Coefficient of friction	EN 51130	R10
Resistance to chemicals	EN 423	Good resistance
Emissions Value		In conformity with AgBB
Swellness value 24h	EN 317	0 %
Locking Strenght	ISO 24334	> 500 kg/m
Effect of a furniture leg	EN 424	No visible damage



DIN 4102 EN 51130 EN 433 EN 1815 EN 423 EN ISO 717-2 ISO 105 EN 12524 EN317

wood designs

PURE  PVC FREE

DIMENSIONS: 1235 x 230/305 mm

Wear Layer Thickness: 0,2 mm

Embossing: Wood

Solutions: Glue Down, HDF, SplasH2O Pet



PU0001
Oak Iceland



PU0002
Oak America



PU0003
Oak Canada



PU0004
Oak Sweden



PU0005
Oak Indonesia



PU0006
Oak Africa



PU0007
Oak Australia



PU0008
Oak India



wood designs

PURE  PVC FREE

DIMENSIONS: 1235 x 230/305 mm

Wear Layer Thickness: 0,2 mm

Embossing: Wood

Solutions: Glue Down, HDF, SplasH2O Pet



PU0009
Oak Ireland



PU0010
Oak England



PU0011
Oak Quebec



PU0012
Oak Mexico




PU0013
Traditional Pine



PU0014
Light Pine



PU0015
Tamarack rustic

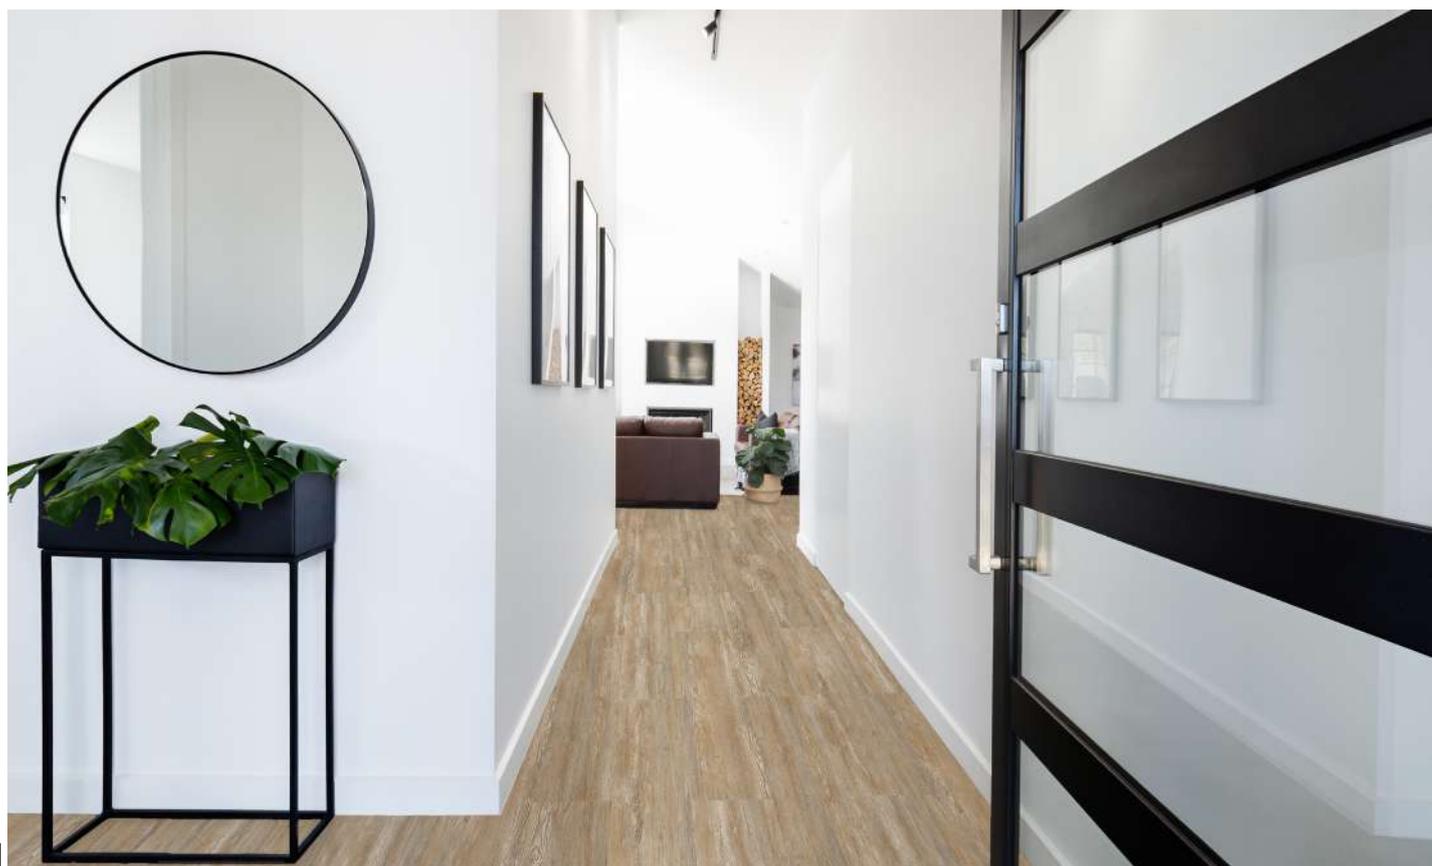

stone designs

PURE  PVC FREE

DIMENSIONS: 620 x 450 mm

Wear Layer Thickness: 0,2 mm

Embossing: Stone

Solutions: Glue Down, HDF, Splash20 Pet



PU0101
Classic Stone



PU0102
Rustic Stone



PU0103
Grey Stone



PU0104
Dark Stone



PU0105
Light Stone



MINERAL



Floover Mineral is the successful combination of a perfectly stable mineral core board and the optical design variety of the newest digital printing technology. Thanks to this, it is possible to customize the decor. This product is the alternative to plastic or wood based flooring and always in perfect harmony with nature.



MINERAL SOLUTION

CLICK SYSTEM

UNICLIC®

Produced under license of Unilin - EF nr: 0843763/U.S. patent nr: 6,036,486



MINERAL

- 100% Waterproof
- No expansion and separation fugue
- Absolutely dimensionally stable
- Anti-slip
- Warm to the touch
- Suitable for allergics
- Free of harmful substances

MINERAL FORMATS



DECORS

1235 x 200 mm

WOOD

920 x 460 mm




CEMENT/STONE

MINERAL SUSTAINABILITY



↑ SECOND LIFE ↓

The innovative **Second Life** process opens up new possibilities in the field of sustainability and authentic recycling. When the old floor has worn out or if a new design is desired, the removed floor is sent back to our factory by the end customer via the reseller and receives a defined compensation. The old design is sanded off the floor plates (no pre-cut plates), which are then re-primed, digitally printed and coated. The floor plates are then re-profiled on all sides. Finally, the new floor is put back on the market and sold as a special size.

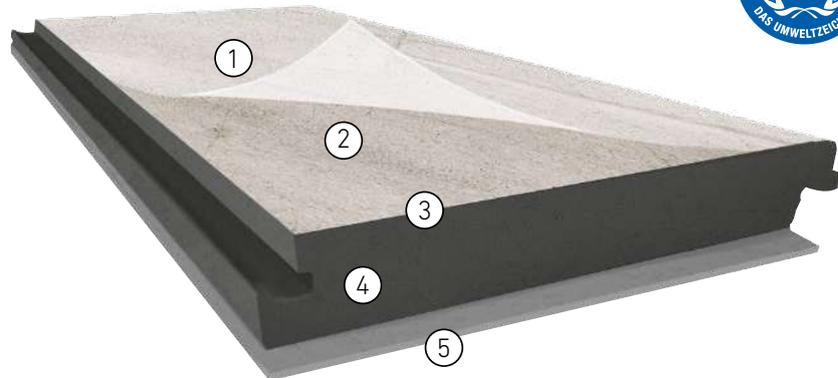

- ① Korus Protection
- ② Lightfast digital print
- ③ Viscoplastic intermediate layer
- ④ Mineral board
- ⑤ GREEN Sound – Sound impact



Produkt unter Lizenz of Unilin - EP nr. 0843763/015, patent nr. 5.006.486

Characteristics	Test	Floover Mineral
Classification	EN 685	23/34
Dimensions	EN 427	1235x200 mm (Wood) 920x460 mm (Cement /Stone)
Thickness	EN 430	7,5 mm
Weight	EN 430	12 kg/m ²
Abrasion Resistance	EN 14354	> 10.000 WR4
	EN 13329	AC5
Chemical Resistance	EN 423	Good
Fire Resistance	EN 13238:2011	Class A2fl-S1
Dimensional Stability	EN 434	< 0,01 %
Acoustics Performance	EN ISO 717-2	ΔLw 19dB
Room Sound Improvement	IHD-W-31	35%
Thermal resistance	EN12524	ca. 0,05 m2 K/W
Residual Indentation	EN 433	0,00 mm
Lightfast	ISO 105	7/8
Slip/Slide resistance	EN 51130	R10
	EN 13893	Class DS
Locking Strenght	ISO 24334	<500 kg/lfm - kg/m
Castor chair suitability	EN 425	No effect
Micro scratch resistance	EN 16094	MSR-A1 / MSR-B1
Stain resistance	EN 438-2	Grad 5/5
Water resistance	EN 317	0%



EN 13238:2011



EN 13329



EN 13893




EN 423




EN ISO 717-2



ISO 105



ISO 24334



EN 433



EN 12524



EN 425



EN 317

wood designs
MINERAL

DIMENSIONS: 1235 x 200 mm

Thickness: 7,55 mm

Embossing: Wood

Pattern repeat: 10 to 20

Solutions: Mineral



FM3640
Wood White



FM3641
Wood Natural



FM3642
Wood Grey



FM3643
Wood Taupe



FM3644
Wood Brown




FM1225
Traditional Oak



FM1297
Country Oak

**CREATE YOUR OWN
CUSTOMIZED DESIGN**
On inquiry. Minimum order 200 m².

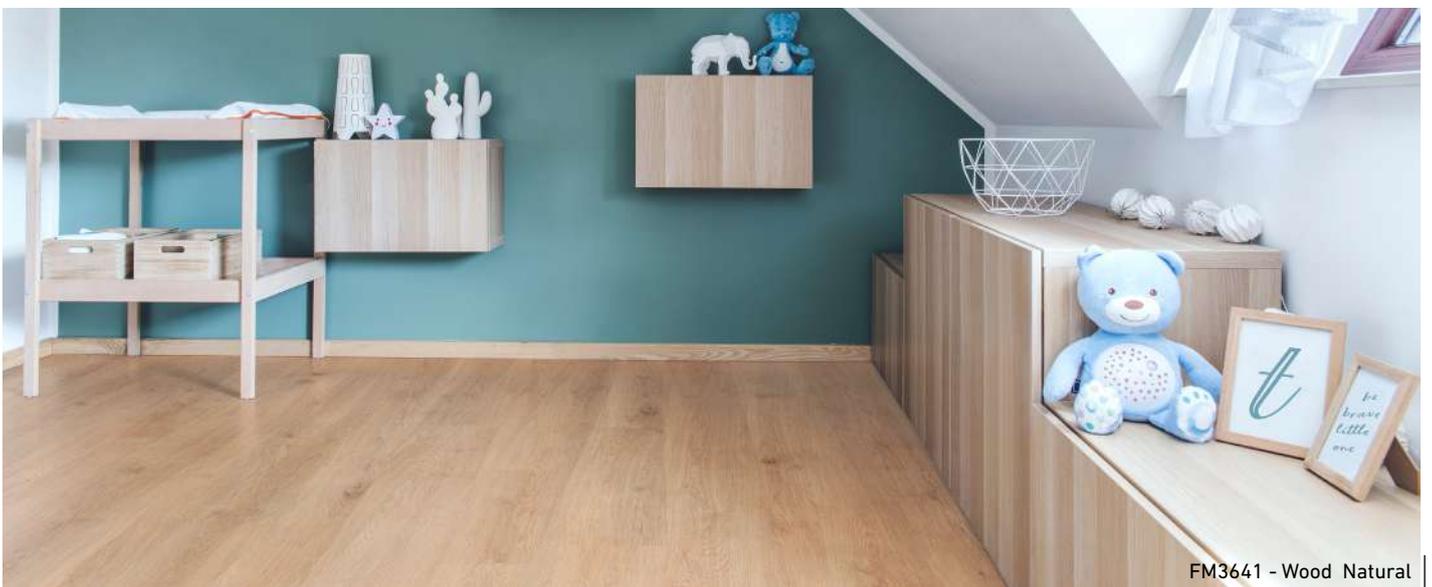

cement/stone designs
MINERAL



Microbevel
4 sides

DIMENSIONS: 920 x 460 mm

Thickness: 7,55 mm

Embossing: Cement/Stone

Pattern repeat: 10 to 20

Solutions: Mineral



FM7140
Cement White



FM7141
Cement Beige



FM7142
Cement Light Grey



FM7143
Cement Dark Grey



FM7145
Cement Graphite



FM7148
Light Ceramic



FM3647
Stone White



FM3652
Stone Grey



FM1054
Concrete Dark



FM1236
Mosaic

**CREATE YOUR OWN
 CUSTOMIZED DESIGN**
 On inquiry. Minimum order 200 m².



FM7142 - Cement Light Grey

other designs
MINERAL

ON
INQUIRY
ONLY


DIMENSIONS: 920 x 460 mm
Thickness: 7,55 mm
Solutions: Mineral



FM0020
Granit Light




FM1116
Pompei Gold

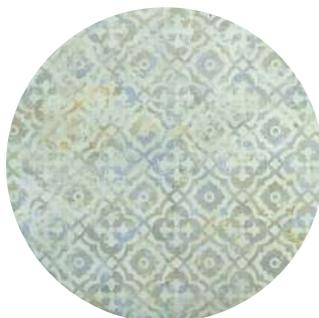

FM1117
Corpet Stone



FM1270
Wine Box

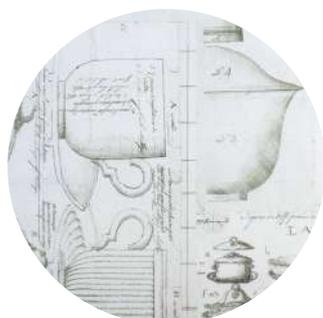

FM1271
Crockery



FM1272
Corpet Stone Mielle



FM1273
Zodiak



other designs

MINERAL

ON
INQUIRY
ONLY

DIMENSIONS: 920 x 460 mm
Thickness: 7,55 mm
Solutions: Mineral




FM1278
Blue Caro



FM1279
White Caro



FM1280
Little Play

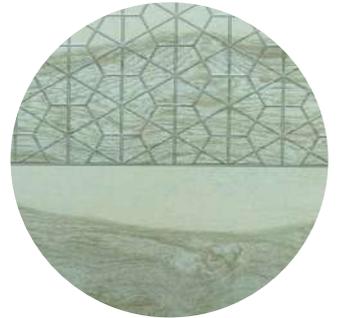

FM1281
Wood Caro



FM1282
Oriental Carpet




FM1283
Stone Flower Brown



FM1284
Stone Flower White



FM1285
Wall Ornament

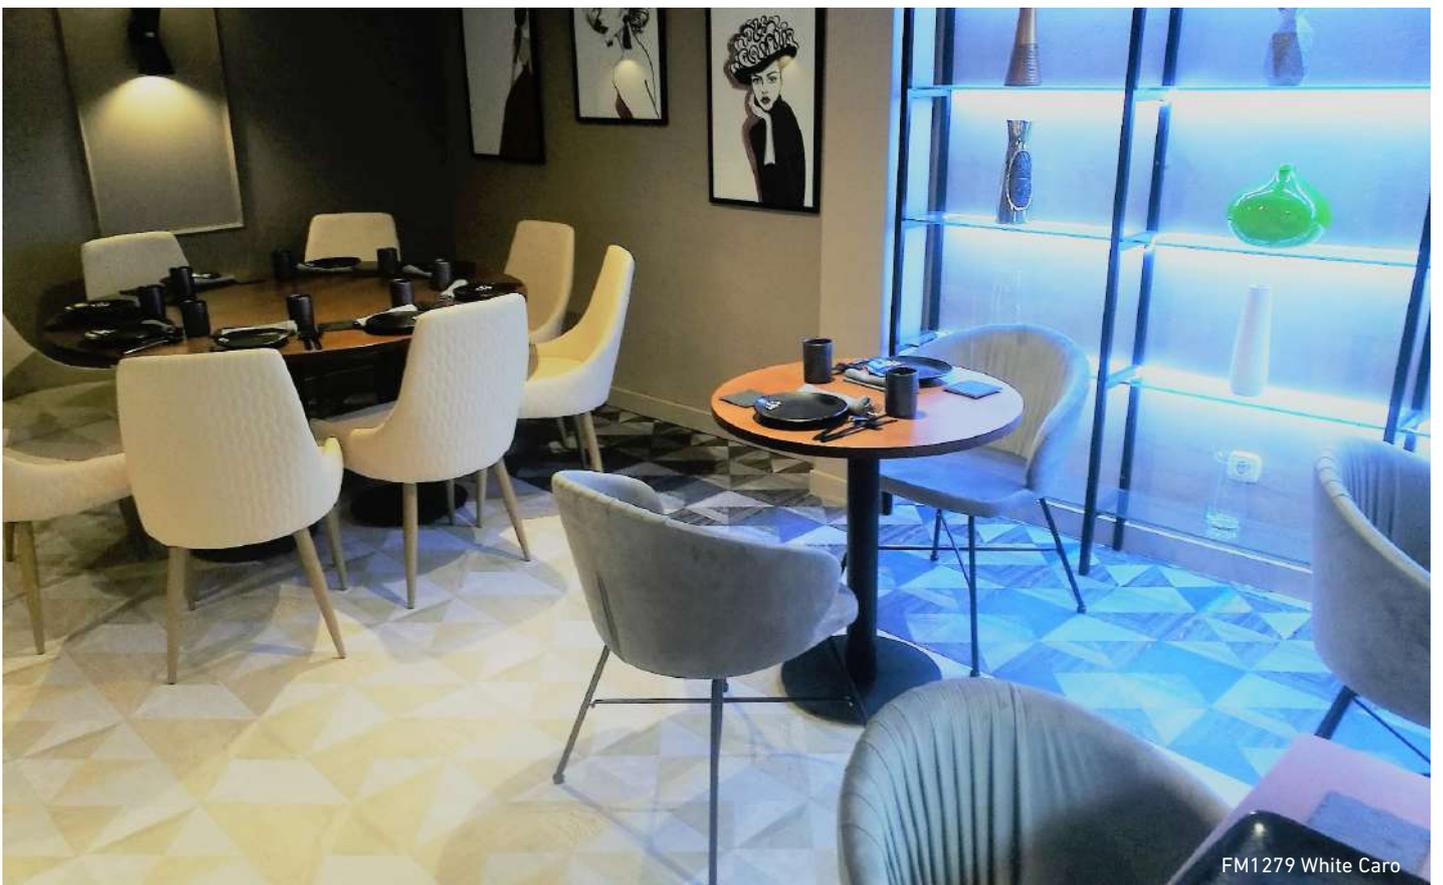

FM1279 White Caro

other designs

MINERAL

ON
INQUIRY
ONLY

DIMENSIONS: 920 x 460 mm
Thickness: 7,55 mm
Solutions: Mineral



FM1286
Stone Bite



FM1287
Concrete Caro



FM1289
Greenstone



FM1291
Pompei White

CREATE YOUR OWN CUSTOMIZED DESIGN
 On inquiry. Minimum order 200 m².

MINERAL ACCESORIES

MINERAL SKIRTING



Available in every Floover Mineral decor.

Sizes: 920 x 45 m / 1235 x 45 mm



Produced under license of Unilin. EP n° 0842763/21.8. patent n° 4.556.486

- ① Korus protection
- ② Mineral core with digital printed decor
- ③ Underlay

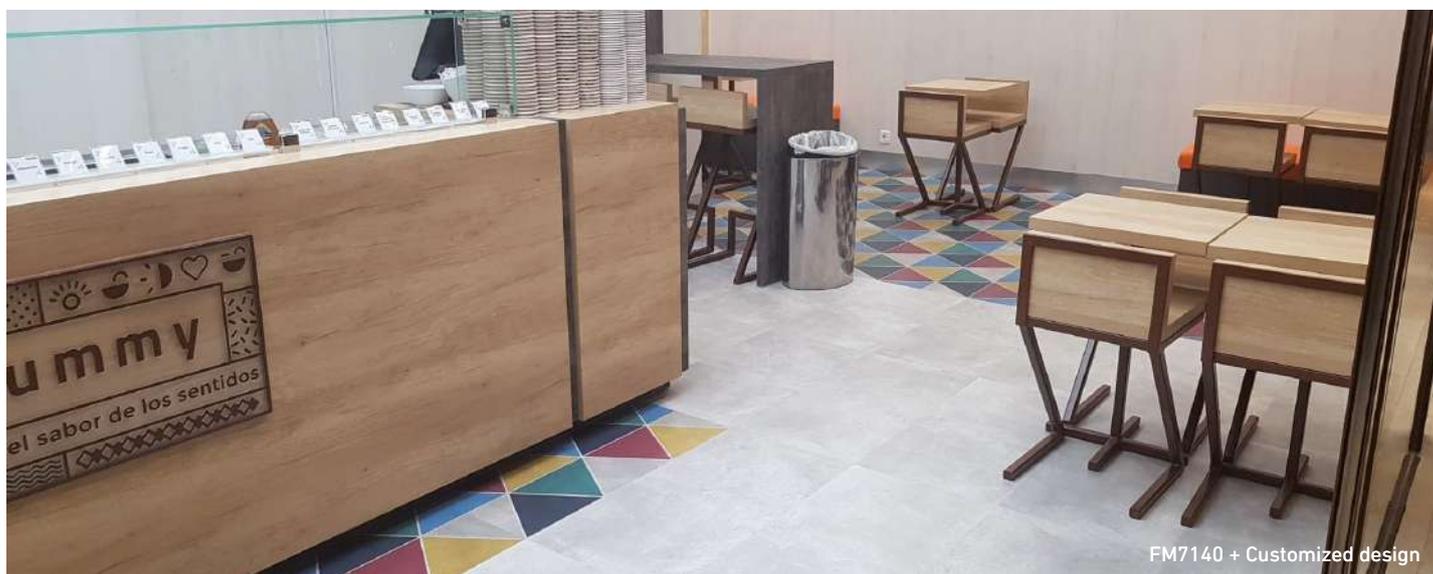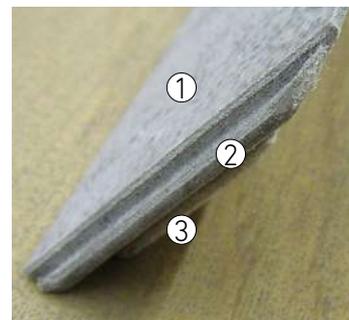

FM7140 + Customized design

WALLCOVERING
DECORATIVE WALLS





GLUING SYSTEM



SMOOTH PAPER

- PVC Free
- Spongeable
- Easy & quick installation


200 g/m²



NON WOVEN VINYL

- Embossed vinyl
- Washable
- Easy & quick installation

380 g/m²



OPALESCENT

- PVC Free
- Washable
- Easy & quick installation

250 g/m²



FIBERGLASS

- High tear resistance
- Washable
- Easy & quick installation

160 g/m²



ACOUSTIC FIBERGLASS

- High tear resistance
- Washable
- Easy & quick installation
- Sound-absorbing product

530 g/m²

Floover Wallcovering is a **digital printing** in 5 different supports. Multiples patterns, designs and pictures to combine and match your flooring or furniture. It's possible to integrate it with floover flooring decors. It is a **customized solution**. You must measure the walls with precision, including columns and angles and send us your order to send you a prototype of the installation.

WALLCOVERING FORMATS



SOLUTIONS

0.98m
width



SMOOTH PAPER

1.04m
width




NON WOVEN VINYL

0.92m
width



OPALESCENT

0.98m
width



FIBERGLASS

0.98m
width



ACOUSTIC FIBERGLASS

WALLCOVERING SOLUTIONS

MOST
INNOVATIVE
PRODUCT

T&G SYSTEM



RIGID PVC

- XXL size
- 100% Waterproof
- No noise
- Affordable
- Easy and quick installation with special glue
- A perfect solution for renovating walls




RIGID DIGITAL

- XXL size
- 100% Waterproof
- No noise
- Affordable
- Easy and quick installation with special glue
- Customizable sheets thanks to digital printing

Floover Rigid Wallcovering are room-high, waterproof wall elements and can be installed extreme quickly and easily. A perfect solution system for renovating or redesigning your walls. The design elements are fixed with a suitable assembly adhesive and can be handled easily by the tongue and groove connection. The resistant surface precedes a wide variety of designs and is an elegant solution for wall covering even in the wet area.

WALLCOVERING FORMATS

2600 x 935 mm

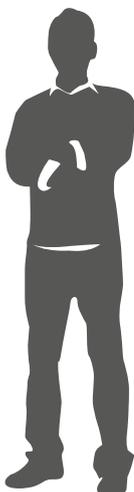

SOLUTIONS

RIGID PVC

2600 x 935 mm



RIGID DIGITAL

SMOOTH PAPER

WALLCOVERING

TECHNICAL DATA SHEET



- ① Digital Printing
- ② **Non-woven fabric one side coated, smooth material.** Cellulose and synthetic fibres of polyester and viscose.




ONLY FOR ITALIAN COLLECTION



Characteristics	Smooth Paper
Weight	200 g/m ²
Thickness	0,6 mm
Roll width	98 cm
Roll lenght	Depending on the project (min: 200 mm)
Flame retardant	Class C-s1, d0 (DIN EN 13501-1)

- Cellulose and synthetic fiber coating for indoor environments. Ecological.
- Tested for harmful substances according to Oeko-Tex Standard 100 Certification.
- Glass fibre, heavy metals and PVC free.
- Apply with specific past glues directly on the back of the stripes.
- Easy to clean using a damp cloth and neutral detergents.

It is possible to add or delete some elements of the composition and to change the colour gradation. The designs can be rearranged into a different format from the standard one. The dimension of the single detail and the proportion of the whole design can change in the adjusting process. The printing on wallpapers could show chromatic differences both from the catalogue and the renderings on screen.

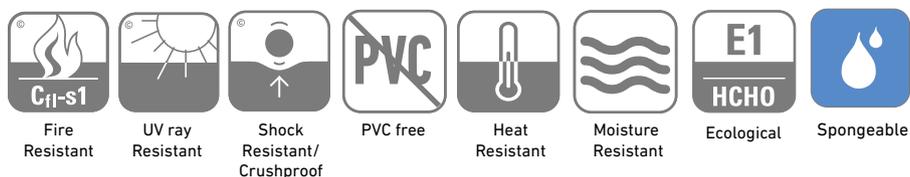


NON WOVEN VINYL

TECHNICAL DATA SHEET

WALLCOVERING



- ① Digital Printing
- ② **Embossed coated vinyl on non-woven fabric.** Coated vinyl on non-woven.

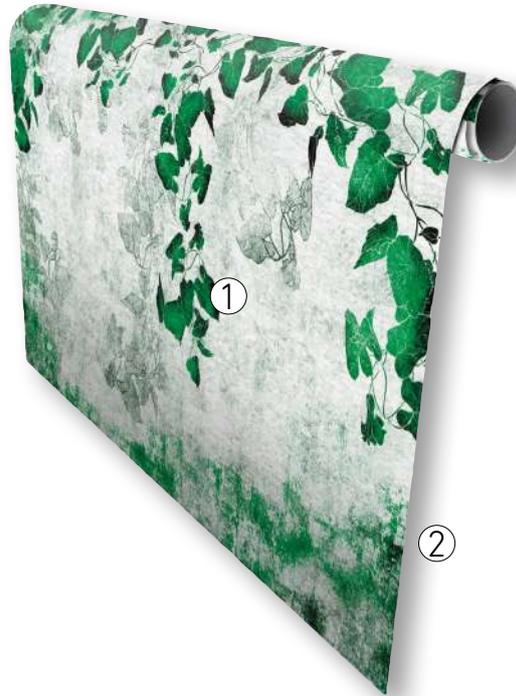


ONLY FOR ITALIAN COLLECTION

Characteristics	Non Woven Vinyl
Weight	380 g/m ²
Thickness	0,8 mm
Roll width	104 cm
Roll length	Depending on the project (min: 200 mm)
Fire retardancy	Classification Bs2 d0 (EN ISO 13501-1)
Light Resistant	Color fastness >6 (EN ISO 105-B02)
Washable	Yes (EN-12956), can be disinfected
Antibacterial	Yes (ISO 846)

- Vinyl wallcovering with non-woven fabric backing, easy to install and remove.
- It does not emit any harmful substances, non-toxic, not subject to emission of heavymetals or formaldehyde.
- Apply with specific past glues directly on the wall.
- Easy to clean using a damp rang and neutral soap, do not use abrasive rags or clothes or paper.
- Non-absorbent, non-permeable, shock resistant.
- IMO certified.

It is possible to add or delete some elements of the composition and to change the colour gradation. The designs can be rearranged into a different format from the standard one. The dimension of the single detail and the proportion of the whole design can change in the adjusting process. The printing on wallpapers could show chromatic differences both from the catalogue and the renderings on screen.

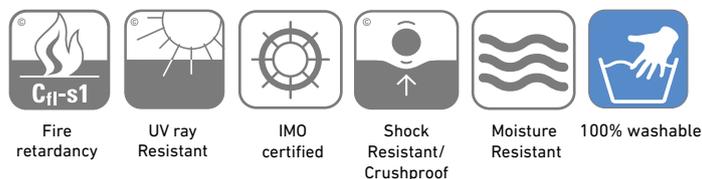

OPALESCENT


WALLCOVERING

TECHNICAL DATA SHEET



① Digital Printing

② **Opalescent on non-woven material**, 50% cellulose + 30% polyester + 20% mica and mineral elements

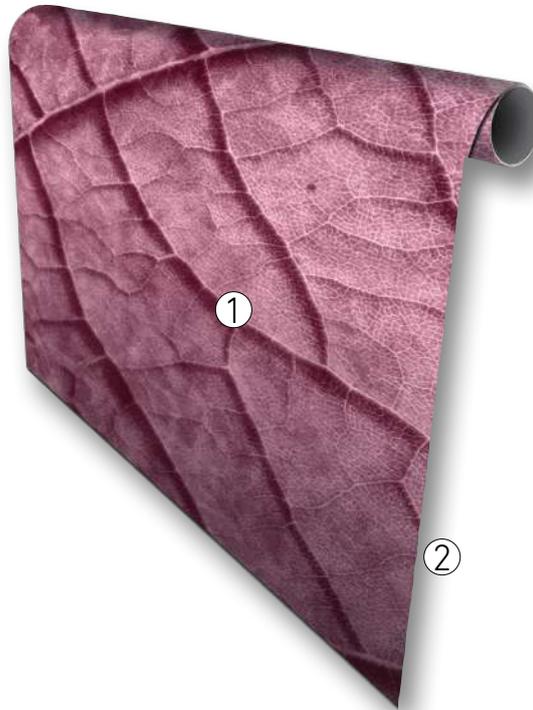


ONLY FOR ITALIAN COLLECTION

DESIGNS PRINTED ON THIS SUPPORT ARE CLEARER THAN THE STANDARD

Characteristics	Opalescent
Weight	250 g/m ²
Thickness	0,45 mm
Roll width	92 cm
Roll length	Depending on the project (min: 200 mm)
Flame retardant	Class B-S2, d0 (UNI EN 13501-1:2009)
Washability level	Spongeable according to British Standards (BS EN 233)

- Coating in cellulose, mica and mineral elements with pearl effect with non-woven fabric support.
- Easy to apply on the wall: dry strippable. Can be applied with specific glue directly on the wall.
- Glass fibre, heavy metals and PVC free.
- Easy to clean using a damp cloth and neutral detergents.

It is possible to add or delete some elements of the composition and to change the colour gradation. The designs can be rearranged into a different format from the standard one. The dimension of the single detail and the proportion of the whole design can change in the adjusting process. The printing on wallpapers could show chromatic differences both from the catalogue and the renderings on screen.

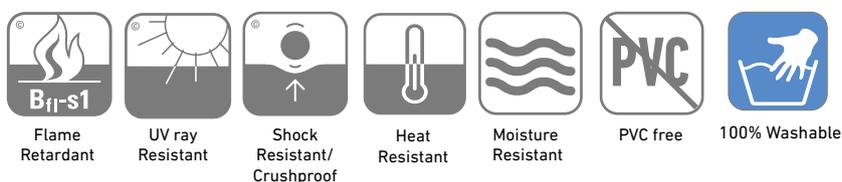

FIBERGLASS

WALLCOVERING

TECHNICAL DATA SHEET



- ① Digital Printing
- ② 100% coated glass fiber laminated



ONLY FOR
ITALIAN
COLLECTION

Characteristics	Fiberglass
Weight	160 g/m ²
Thickness	1,6 mm
Roll width	98 cm
Roll length	Depending on the project (min: 200 mm)
Fire Resistance	Class B-S1, d0 (DIN EN 13501-1)
Oekotex certificate	Product Class 1
Emission in indoor air	A+ (very low)

- Fiberglass wallcovering with high tear resistance, ideal for restoring walls with cracks or irregularities. Ideal for wet areas, kitchens and bathrooms (with subsequent Mapecoat Decor Protection treatment).
- Apply with specific past glues directly on the wall. High tear resistance.
- For cleaning, use neutral detergents.

It is possible to add or delete some elements of the composition and to change the colour gradation. The designs can be rearranged into a different format from the standard one. The dimension of the single detail and the proportion of the whole design can change in the adjusting process. The printing on wallpapers could show chromatic differences both from the catalogue and the renderings on screen.



ACOUSTIC FIBERGLASS


WALLCOVERING

TECHNICAL DATA SHEET



ONLY FOR
ITALIAN
COLLECTION

- ① Digital Printing
- ② **100% coated glass fiber** laminated
- ③ Acoustic layer

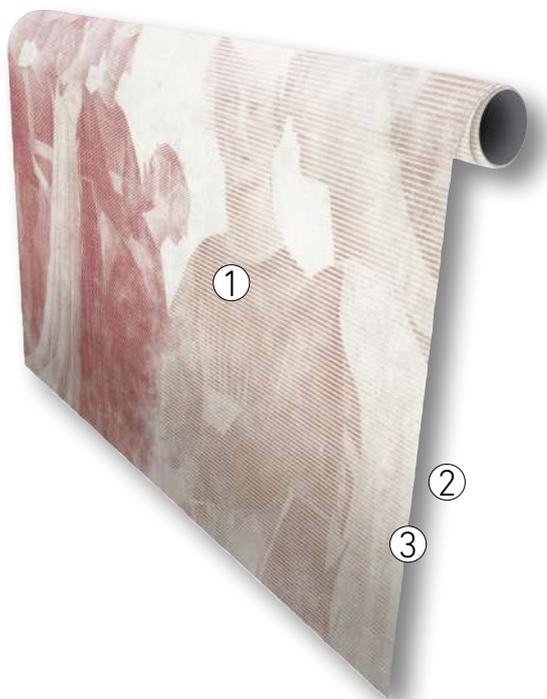

Characteristics	Acoustic Fiberglass
Weight	530 g/m ²
Thickness	3 mm
Roll width	98 cm
Roll length	Depending on the project (min: 200 mm)
Fire Resistance	Class B-S1, d0 (DIN EN 13501-1)
Oekotex certificate	Product Class 1
Emission in indoor air	A+ (very low)

- Fiberglass wallcovering with felt acoustic underlay. Ideal for environments where it is necessary to improve sound insulation ($\Delta = 0,25$). Weighted sound absorption index according to NF EN ISO 654, up to 40%.
- Apply with specific past glues directly on the wall. High tear resistance.
- To clean, use a damp rag: use only clean water.

It is possible to add or delete some elements of the composition and to change the colour gradation. The designs can be rearranged into a different format from the standard one. The dimension of the single detail and the proportion of the whole design can change in the adjusting process. The printing on wallpapers could show chromatic differences both from the catalogue and the renderings on screen.



Fire
Resistance



PVC free



Moisture
Resistant




Sound-absorbing
Product



100%
Washable



RIGID PVC

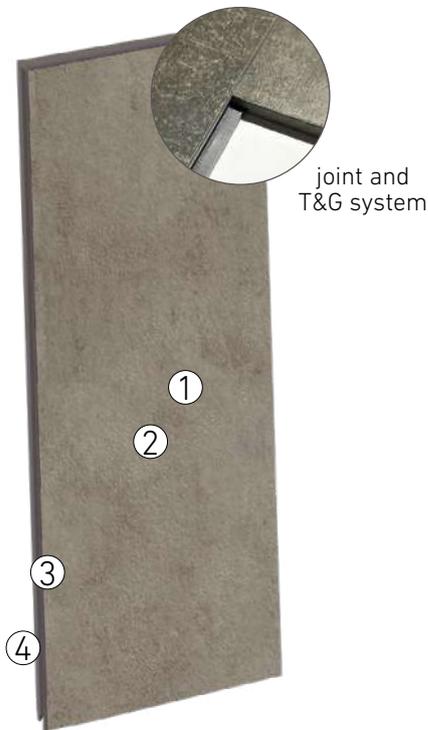

- ① High protection and resistance PU layer
- ② Decor 0,1 mm
- ③ Elastic vinyl foil 0,5 mm
- ④ Waterproof hydro core board 4,4 mm


RIGID DIGITAL



MOST INNOVATIVE PRODUCT


- ① High protection and resistance PU layer
- ② Digital printing
- ③ Waterproof hydro core board 4,4 mm

Characteristics	Test	Rigid PVC & Digital
Dimensions	EN 427/428	2600 x 935 mm
Thickness	EN 430	5 mm
Weight	EN 430	ca. 6000 g/m ²
Fire Resistance	EN ISO 9239-1	Class BFLs1 (B1)
Dimensional Stability	EN 434	< 0,10 %
Thermal Resistance	EN 12524	0,04 m ² K/W
Residual Indentation	EN 433	max. 0,03 mm
Reaction to static electricity	EN 1815	< 2kV
Lightfast	ISO 105	6/7
Resistance to chemicals	EN 438	Good resistance
Emissions Value		In conformity with AgBB
Water Resistant test	EN 317	0% Swelling

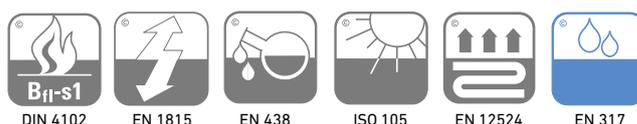

- **Contemporary design:** A perfect fusion between classical and contemporary style, inspired by Nature's shapes, by strong colored Persian tiles, and by the delicate features of Japanese prints.
- **Fragments of the past:** This collection takes its inspiration from the great masters of the past, who are, still today, considered real trendsetters and innovators in the art world. This Designer Wallpaper takes shape from the works of Piero della Francesca, Giovanni Battista Piranesi, Albrecht Dürer and Henri Rousseau.
- **Coordinated Collection:** The 12 subjects of the collection used for the decoration of the walls are harmonised with the same colour, texture and style of the floors. Furthermore, the wallpapers can be enriched with graphics part of the other collections in the catalogue creating a unique, original and customised proposal.
- **Suite Collection:** A collection made in collaboration with designers with an established reputation on the Italian scene.

277
 DESIGNS

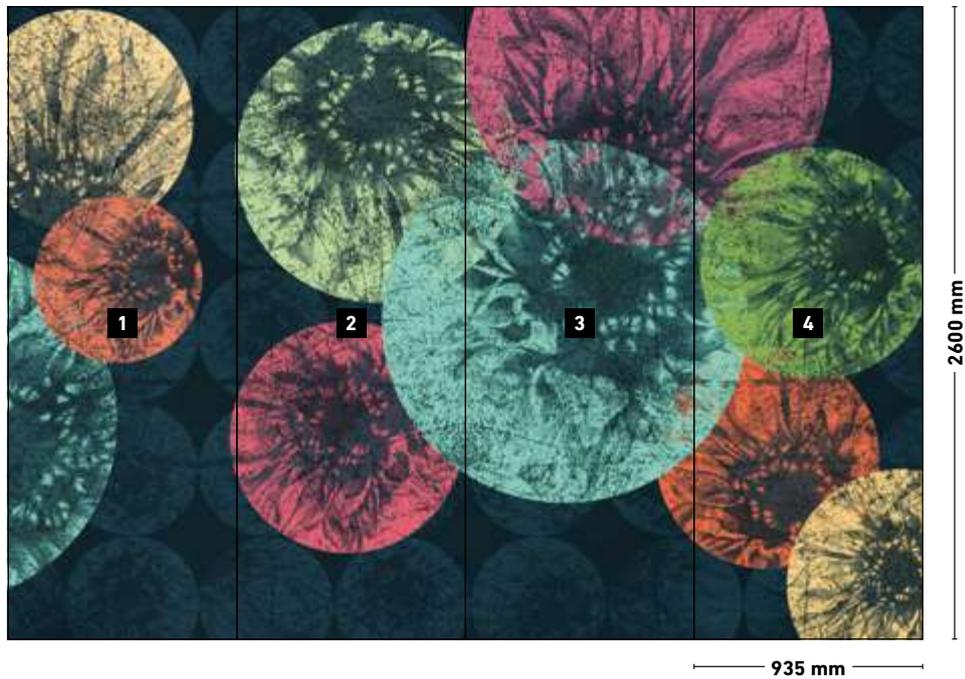

It is possible to add or delete some elements of the composition and to change the colour gradation. The designs can be rearranged into a different format from the standard one. The dimension of the single detail and the proportion of the whole design can change in the adjusting process. The printing on wallpapers could show chromatic differences both from the catalogue and the renderings on screen.



Foliage



Tropical Parrots



Pelagia



Faith



Autumn



Sakura Flowers



Flamingo Bay



FSW000949
 White Marble



FSW000915
 Light Grey



FSW033971 *
 Cream Stone



FSW064519 *
 Industrial Stone




FSW136137 *
 Dark Stone



FSW212431 *
 Light Stone




FSW212432 *
 Silver Stone

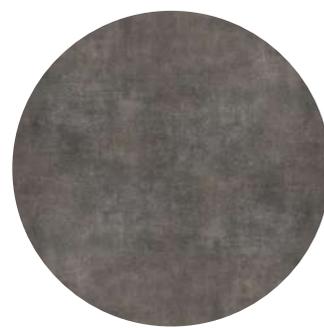

FSW402102 *
 Natural Stone

* Decors are available in swiss collection stone 0,55 range

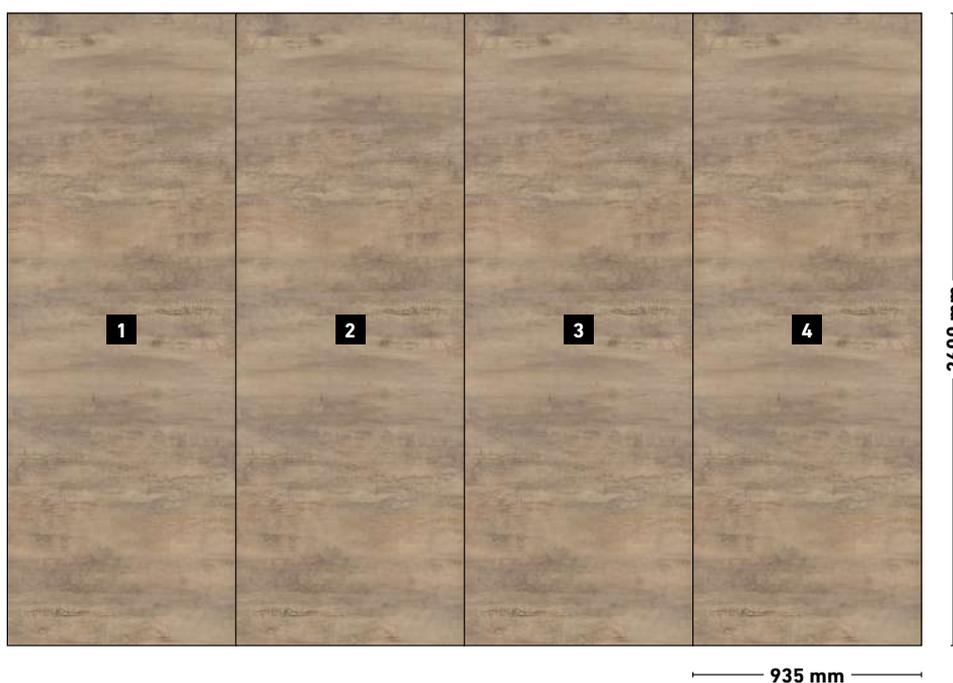

Installation of individual vinyl panels without continuity in the design. The pattern of the piece does not coincide with that of the next piece where they join. The panels necessary for covering the total width of the wall to be covered should be ordered, always bearing in mind the dimensions of the panel. Finishes in marble, stone and cement.



FSW212431 Light Stone



FSW402102 Natural Stone




FSW212432 Silver Stone



FSW000915 Light Grey

- **Diana Designs (24 designs):** This collection is made by designer and artist Diana, therefore it is completely exclusive and reflects her personality and creativity. Here you will find modern, classic and contemporary prints that convey the author's own style. A range of designs that perfectly combine art and a variety of colors.

- **Welcome Design (50 designs):** It is a collection with pictorial overtones and poetic inspiration. Contemporary, urban, avant-garde and provocative designs. A wide range with abstract drawings, shapes or patterns inspired by ancient mosaics.

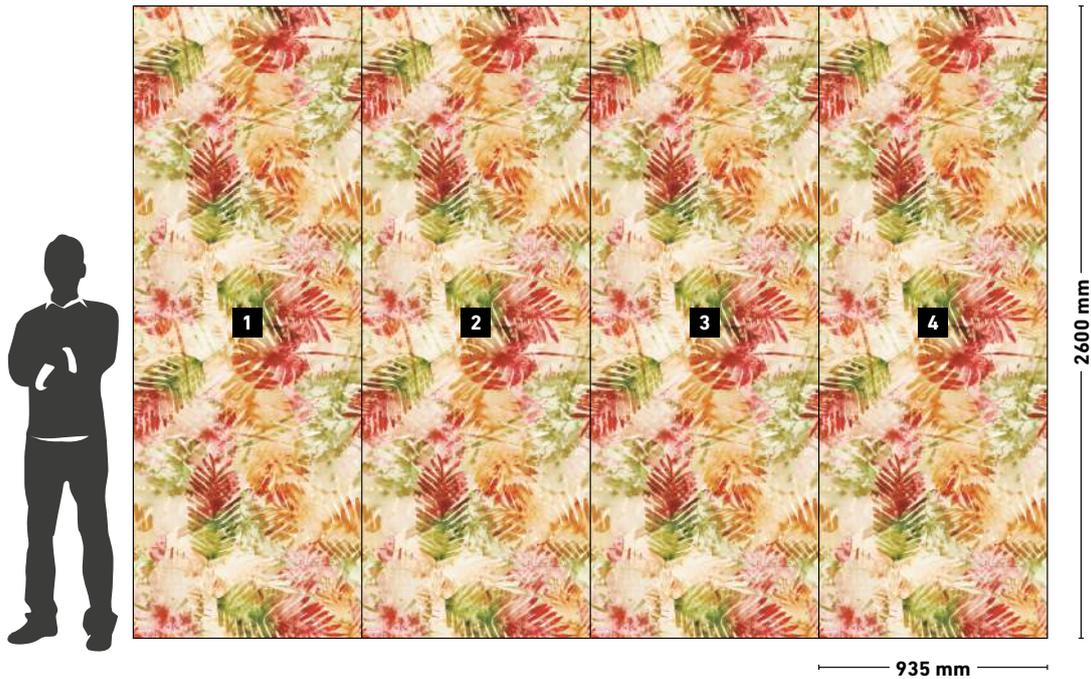

Installation of sets of digital vinyl panels with continuity in the design. The pattern of the piece coincides with that of the next piece where they join such that upon joining, an effect of continuity is created. The panels necessary for covering the total width of the wall should be ordered for the project.





Geometric



Shapes




Tiles



Tropical




Petals

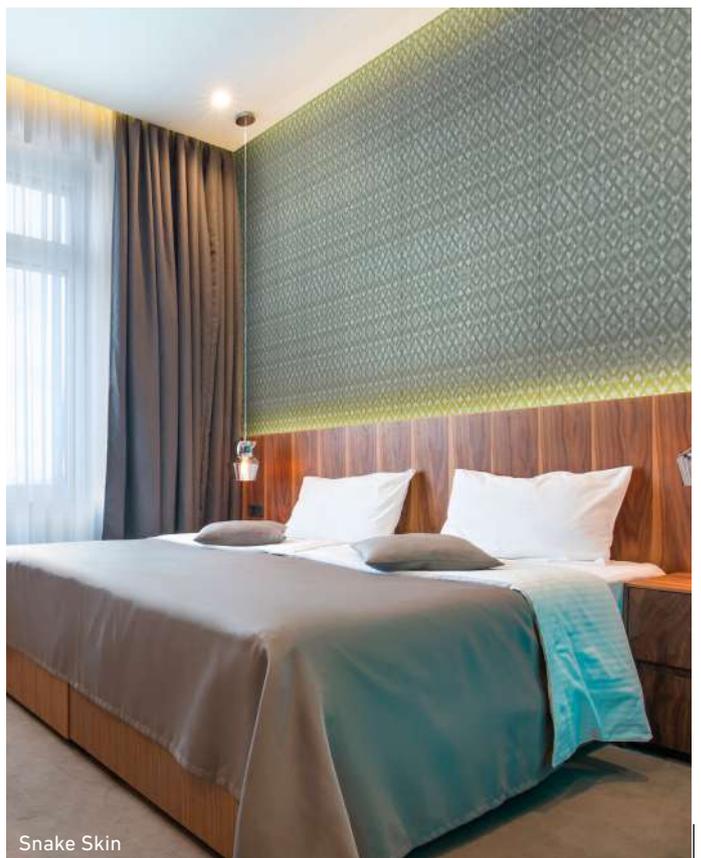


Snake Skin

- **Welcome Design (7 designs):** A unique collection with seven impressive murals that will not leave you indifferent. Geometric shapes, flowers, leaves, tropical environments and Mexican skulls make up this peculiar range.

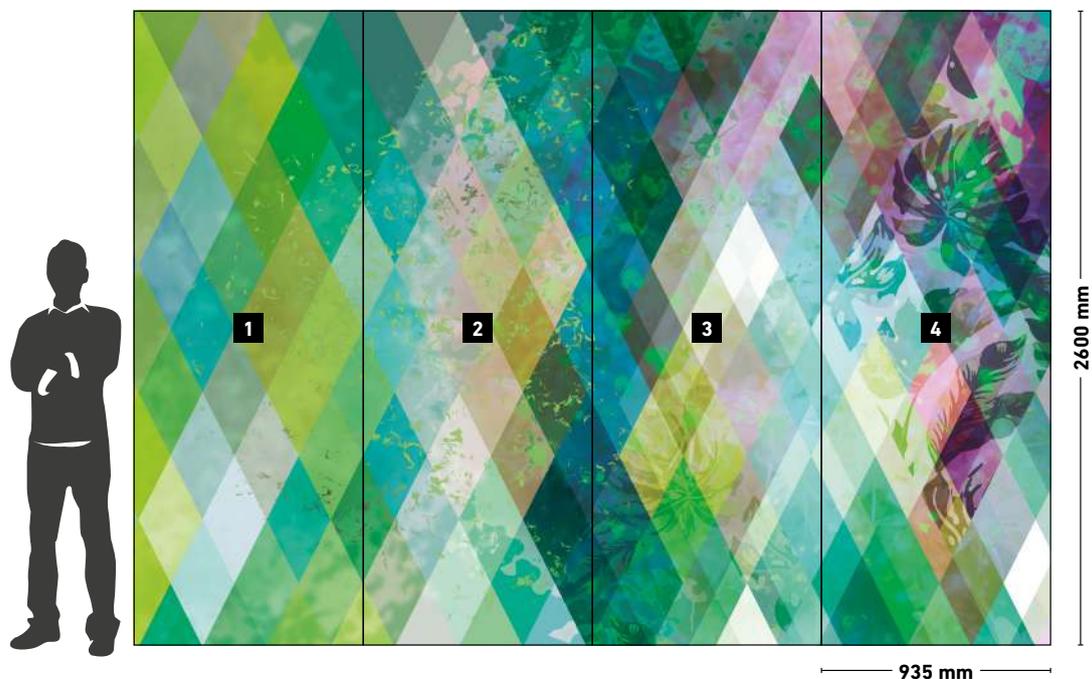

Installation of sets of digital vinyl panels with continuity in the design. The pattern of the piece coincides with that of the next piece where they join. By joining 4 panels, the design is completed. Four panels should always be ordered in order to create one mural. The installation of the four panels makes a single exclusive design with a total width of 3740mm.

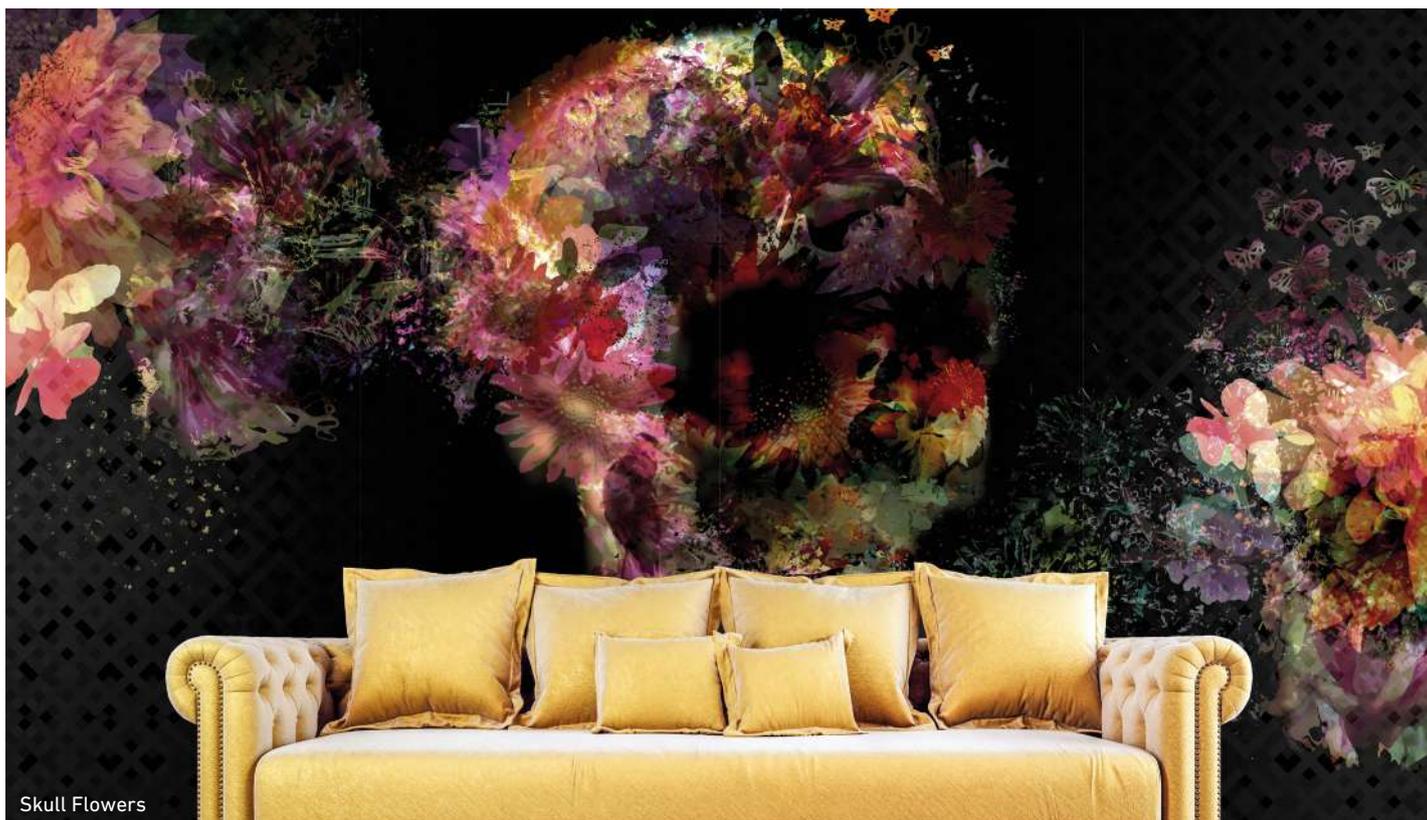

Skull Flowers



Orchid Love



Grey Leaves



Tropical Flour




Vintage Explosion

WALLCOVERING ACCESSORIES

FINISHING TRIMS FOR RIGID T&G SYSTEM

These trims can be used to finish corners and edges with Rigid Wallcovering.


ALUMINIUM FINISHING TRIM U

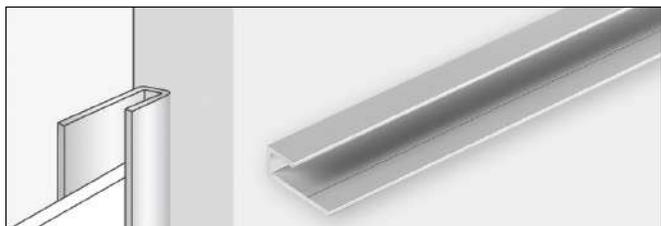


ALUMINIUM CLICK FINISHING TRIM




ALUMINIUM UNIVERSAL CORNER 15-15mm

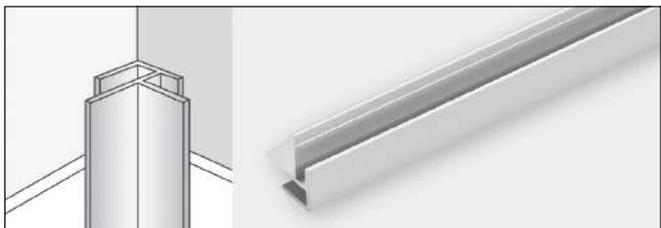


ALUMINIUM UNIVERSAL CORNER 12-20mm

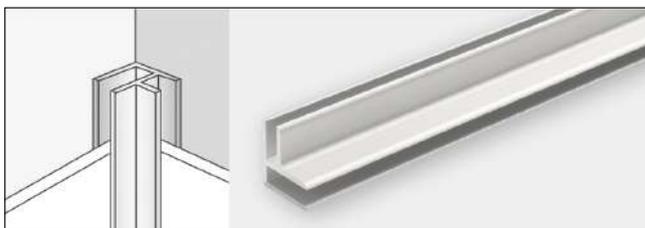


ALUMINIUM INSIDE CORNER 12mm

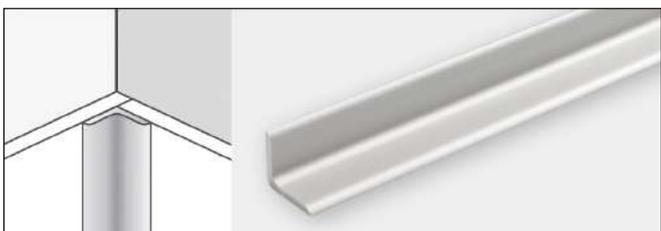

ALUMINIUM L-TRIM OUTSIDE CORNER 16-12mm

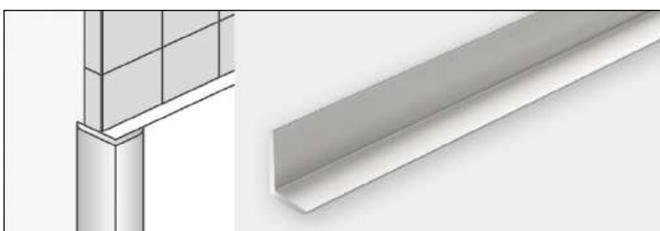

ALUMINIUM START TRIM

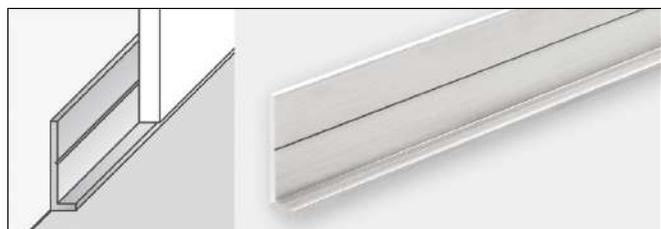

WALLCOVERING ACCESSORIES

ADHESIVES/PROTECTORS FOR GLUING SYSTEM



ULTRABOND ECO DECOR DRY

Ready to use adhesive for wallpaper in dry areas.



ULTRABOND ECO DECOR WET

Ready to use adhesive for wallpaper in wet areas, also inside showers.



ADESILEX MT32

Universal for vinyl wallpaper

Glue in water dispersion with simple spreading. White paste easily applicable both by spatula, roller or brush.



MAPEOCOAT DECOR PROTECTION

Water treatment to seal joints in wallcovering that is frequently splashed or wet.

ADHESIVES/SEALANTS FOR T&G SYSTEM



DOMOSTYL HYBRID

Neutral glue based on MS polymers and permanently elastic. Not suitable in showers or on pre-existing tiles.



ULTRABOND ECO MS4 LVT WALL

One-component, silylated polymer-based adhesive. Particularly suitable for laying LVT in wet area even on non-absorbent substrates.



MAPESIL AC

Pure, mould-resistant, acetic silicone sealant suitable for sealing LVT panels in showers. Apply on clean and dry surfaces.



FLEXCOLOR 4 LVT GROUT

Polymer dispersion grout with mineral and special additives. It is supplied as a ready-mixed paste with special rheological properties that makes it easy to apply. Perfect for grout panels joints.

WARRANTY

WARRANTY CONDITIONS AND COMPLAINS

This warranty conditions are for Floover indoor solutions

Floover Flooring warranty applies for a period of 15 years for residential use and 10 years for commercial use, starting from the purchase date, whilst adhering to the following conditions:

Floover guarantees the following:

- Any Floover flooring will retain its dimensional stability, as it is defined on our technical data sheet.
- All flooring layers will remain glued together (with temperature under 70°C).
- For products with click, joints between clicked pieces will remain closed.
- Normal sunshine will not alter surface colours. Extreme sunlight or extremely aggressive chemicals may affect colours. Defects resulting from such factors are excluded from this warranty.
- Friction will not generate any static electricity.
- In case of Floover products to be glued, connection to the subfloor is excluded from this warranty, since it depends on glue performance and subfloor conditions.
- Differences in the colour of materials from different batches are possible and no cause of complaint.
- Warranty does not apply to defects due to inappropriate use or temperature or humidity conditions over the standard.

This warranty is valid only if:

- The product has been installed under all indications of Floover laying instructions.
- There is an adequate use recommended by Floover according to the category selected and appropriate dimensions and conditions of the room (subfloor conditions, ambient humidity, etc...).
- The product maintenance is performed periodically, according to the instructions recommended by Floover and always using appropriate cleaning products. This warranty is not valid for defects resulting from an incorrect or insufficiently frequent maintenance, from wrong methods, inappropriate cleaning products, or for cuts or marks caused by sharp tools.

Under the following installation conditions:

Always install on subfloor materials recommended by Floover as indicated in the installation instructions text for each product. Generally:

- Base floor must be resistant, in good conditions, clean and dry.
- Moisture content of the base has to be less than 2.5% CM (cement subsoil) or less than 1.5% (anhydrite subsoil). For a subfloor heating system it has to be respectively less than 1.5% and 0.3%.
- Base floor must be levelled with a maximum difference of ± 2 mm per meter for all Floover products. Roughness or unevenness of the subfloor may appear on glued flooring.
- Click flooring shall be installed floating (without glue or anchorages); the short joints of the boards between two different lines must be offset of at least 300 mm; click flooring requires 10 mm of empty space for dilatation all over the perimeter, including structural elements and heavy furniture.
- The maximum area to install click flooring without joints depends on the chosen support and must be respected.
- In the case of underfloor water heating system, adhere to the protocol of start-up.
- In areas near to large windows or glass fronts, it is necessary to use curtains to minimize the overheating of the flooring caused by the impact of sunlight.

Complaints:

Once a complaint is submitted according to Floover's instructions, and in case the complaint is accepted, the customer will receive a replacement of the material (or similar or superior quality in case of impossibility), delivered at the same original destination.

Any installation costs, de-installing flooring, etc... are not included in the fabrication warranty.

If the complaint is addressed after 1 year of the installation of the material, an annual accumulative reduction is applied from the purchase value of -4% per year.

FOR MORE INFORMATION CHECK OUR INSTALLATION, MAINTENANCE AND WARRANTY GUIDE

FAQ

FREQUENTLY ASKED QUESTIONS

WHICH ARE THE MAIN APPLICATIONS FOR FLOOVER?

Main applications are offices, hotel rooms and corridors, VIP rooms and common areas, gyms and bathrooms, retail stores and exhibition points. It is also commonly applied in walls and furniture covers. Always used in indoor applications. For outdoor applications, please see Floover Decking

IS FLOOVER A RESIDENTIAL OR COMMERCIAL PRODUCT?

Floover is a professional floorcovering for commercial areas where all technical properties of the material correspond to this use. Of course this is also appropriate for residential use.

IS IT SUITABLE FOR SUBFLOOR HEATING SYSTEM?

Yes, it is. Just need to follow the procedures on the installations instruction. Also good heat transmission ratio for environmental and efficiency aspect has been proved according to CE standards.

IS FLOOVER SUITABLE FOR CHILDREN AREAS?

Yes, it is. Floover is also used in kindergartens, playgrounds and game rooms. Its core structure is soft and smooth.

IS IT SUITABLE FOR HOSPITALS?

Yes it is. It is used in treatment rooms, corridors, guest rooms, cafeterias and other public areas. Note: Floover Woven range is not recommended in surgery rooms

IS IT SUITABLE FOR HIGH TRAFFIC-AREAS?

Yes, it is. Floover products are mainly classified Class 33, suitable for heavy traffic due to the special yarn construction. Floover Original collection is classified as Class 32, which is recommended for housing, but the rest of the products are Class 33 specially recommended for high traffic areas, such as shops, open-plan offices and public halls.

DOES IT SOUND WHEN WALKING ON THEM?

Impact sound insulation varies for different products from 12dB to 22 dB, depending on the product construction and sub-floor installation.

IS IT SUITABLE FOR CHAIR CASTORS?

Yes, use chairs with hard castors whenever possible (polyamide).

IS FLOOVER FLOORING ANTI-STATIC?

Floover flooring does not generate a static charge because of the construction of the multi-layer. Floover flooring products have been tested and fulfil the requirements of the European Directive ISO1815.

WHAT ARE THE DIFFERENT INSTALLATION SYSTEMS FOR?

Floover products on click system are suitable for medium and small areas, where the floor is not perfectly flat and floating system is accepted. They can be produced on HDF boards to be used when there is no humidity risk, or in waterproof boards (Splash) and these are used in bigger areas (>200m² up to 400m²) where joints are not required.

Floover rolls are the perfect application for professionals when required for bigger areas – glue down system and welding joints are needed.

Floover tiles is the easiest solution when it comes to glue-down system.

Floover Hortus is specially designed for outdoor spaces.

DOES FLOOVER FLOORING NEED ANY PARTICULAR MAINTENANCE?

Floover flooring systems can be easily cleaned with water and soap. We strongly recommend using Floover Cleaner, or in any case a specific vinyl cleaner.

Floover floors can be restored periodically with an intensive or heavy cleaner product and would look as good as new. See our maintenance guide" for more details. You can also watch our tutorials on Floover Flooring Channel in Youtube (www.youtube.com/flooverflooring)

IS IT POSSIBLE TO CUSTOMIZE A FLOORING SOLUTION IN COLOUR OR DESIGN?

Yes, it is. Check specific requirements in quantities.

DOES FLOOVER PROVIDE A SKIRTING SYSTEM?

Yes, we do. Floover supplies traditional skirting but also waterproof skirting, stair nose, transition and dilatation joints for all the colours available in Floover range.

DOES FLOOVER HAVE GREEN CERTIFICATES?

All Floover products are "Ü Zeichen" certificated for their extremely low emissions. All our products hold a high class rating certificate based on different criteria. The product also holds CE for health and fire concerns, as well as ASTM tests. Floover presents all its vinyl collections with a technology evolution that allows us to improve the emissions performance by eliminating completely any phthalate emission from its products, making them the safest for your children.

PROJECTS

- Grands Espagne Shop (Paris, France)
- Hotel Aldiana (Cyprus)
- Zacchera Hotels (Laggo Maggiore, Italy)
- Disney's Hotel Cheyenne (Paris, France)
- Hotel AC by Marriott Cuzco (Madrid, Spain)
- Savoy Club (Bydgoszcz, Poland)
- Hotel Confortel / Ilunion (Huelva, Spain)
- Oita Station (Tokyo, Japan)
- Hotel Aldiana (Cyprus)
- Hotel Sallés Pere IV (Barcelona, Spain)
- Arkansas University (Queretaro, Mexico)
- Bütler shop (Liestal, Switzerland)
- Palacio de Cristal (Oporto, Portugal)
- Hotel HG Lomo Blanco (Lanzarote, Spain)
- Corum Shops (Geneva and Shangai)
- Hotel Piolets (Andorra)
- Radisson Blu (Riad, Saudi Arabia)
- Hotel Confortel Suites (Madrid, Spain)
- Indiana University (Hong Kong)
- Thai Former Bank (Thailand)
- AC New Orleans Bourbon (New Orleans, EEUU)
- Hotel Sánchez (Andorra)
- Radison Hotel (Bolivia)
- Restaurant Varadero Santa Pola (Alicante, Spain)
- Grosvenor House (Dubai, U.A.E)
- Resort Aldiana Zypern (Cyprus)
- Garberhof Beauty & Wellness Resort (Malles, Italy)
- Only You Hotel (Madrid, Spain)
- Zubarah Hotel (Doha, Qatar)
- Hilton Hotel (Abu Dhabi, U.A.E)
- Fairfield Inn (Chicago, USA)
- Hotel Burdeos (Burdeos, France)
- Best Western Hotel (Verona, Italy)
- Super Bock Arena - Pavilhão Rosa Mota (Porto, Portugal)
- Secrets Saint Martin Resorts & SPA (Saint Martin, Caribe)
- American Palace Hotel (Roma, Italy)
- Museo Nacional de Arte Cataluña (Barcelona, Spain)
- Road Trip Bar & Grill (Cyprus)
- Barcelona Airport Hotel (Barcelona, Spain)
- Hotel Confortel / Ilunion (Bilbao, Spain)
- Ibérica Restaurants (Glasgow, Leeds and Victoria, UK)
- Lopesan H. Villa del Conde (Canarias, Spain)
- Hotel AC by Marriott Palacio del Retiro (Madrid, Spain)
- Hassler Hotel (Netherlands)
- Iberostar Hotels (Mallorca, Spain)
- President Hotel (Roma, Italy)
- Restaurant Europe Maxima Zarya Hotel (Moscow, Russia)
- Hotel H10 Rubicon Palace (Canarias, Spain)
- Aparthotel Solayme (Lisboa, Portugal)
- Stefanel Shop (Krakov, Poland)
- Hotel AC by Marriott Chicago (Chicago, USA)
- Hotel Coral H & R (Canarias, Spain)
- Pullman Hotel (Bucharest)
- Hotel Illot (Mallorca, Spain)
- Premier Inn (Dubai, U.A.E)
- B&B Itaca Fregene (Roma, Italy)
- Maxima Zarya Hotel (Moscow, Russia)
- Hotel Jinging (Shangai, China)
- Lago Di Garda Hotel (Lago di Garda, Italy)
- Itoya Shopping Mall (Tokyo, Japan)
- Hotel Parque (Las Palmas, Spain)
- Restaurant Sushiko (Bologna, Italy)
- Brauhaus Restaurant (Shangai, China)
- Hilton Hotel (Riad, Saudi Arabia)
- Hotel Bachata (Colombia)
- Hotel Principe (Rimini, Italy)
- Blue Waters Hotel (Dubai , U.A.E)
- Areas Hotel (Cyprus)
- Stejari Club (Bucharest)
- BessaHotel Baixa (Oporto, Portugal)
- Pestana Plaza Mayor (Madrid, Spain)
- Nuovo Teatro delle Commedie (Livorno, Italy)
- Restaurant Sushiko (Bologna, Italy)
- Hotel Simbad (Mallorca, Spain)
- Dean Gera Hair Salon (Malta)
- Telenor Shop (Sofia, Bulgaria)





HEADQUARTERS

C/ Selva, 4 2nd Floor
08820 El Prat de Llobregat · Barcelona (Spain)
T. +34 938 913 310
info@floover.com

FACTORY

Palü Daint
CH-7537 Müstair (Switzerland)

www.floover.com

